DREDGE'S
SUSPENSION BRIDGE
PRINCIPLES OF THE LEVER

DREDGE'S

SUSPENSION BRIDGE

EXPLAINED UPON THE

PRINCIPLES OF THE LEVER.

BY W. TURNBULL,

AUTHOR OF TREATISES ON THE STRENGTH OF CAST IRON, TIMBER, ETC. ETC.

TO WHICH ARE ADDED,

A SPECIFICATION OF THE QUANTITIES OF MATERIAL USED IN
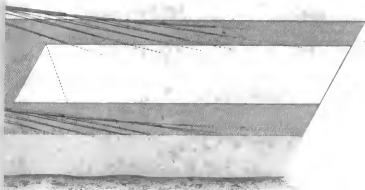THE SUSPENSION BRIDGE AT BALLOCH FERRY,

DUNBARTONSHIRE,

And an Isometrical Projection.

BY JAMES DREDGE, OF BATH.

THE RIGHT HONOURABLE LORD WESTERN.

MY LORD,

In consideration of the great interest you have manifested in the success of my Invention, and the influence of your Lordship's approbation in drawing public attention thereto, the following Essay, drawn up with a design of establishing the principles mathematically, is, as a small tribute of gratitude,

Most respectfully inscribed by,

My Lord,

Your Lordship's most obedient Servant,

JAMES DREDGE.

PREFACE.

THE circumstances which led to the composition of the following pages may be briefly stated, thus. Early in the spring of the present year (1841), John Macneill, Esq., an Engineer of high professional standing, proposed it to me by way of a problem :—

> *To trace the principle which induced Mr. Dredge to*
> *adopt the tapering chain and the oblique suspending*
> *rods, and to prove mathematically, that the principle*
> *thus adopted is strictly in accordance with the*
> *maxims of accurate mechanics.*

To assist in arriving at a correct conclusion, the proposer laid before me several notices that had appeared on the subject in the Mechanics' Magazine and other periodicals, and among these was a letter from Lord Western to Lord Viscount Melbourne, originally published in the *Times* newspaper, and afterwards in the Civil Engineer and Architect's Journal for June, 1840. This letter being drawn up in a strain so candid and liberal, setting forth in fervid and glowing language the confidence which the noble writer entertains of the correctness of Mr. Dredge's system, and the advantages to be derived from its general adoption,

induced me to believe that the principle, however it might have been discovered, was worthy of the most attentive consideration, and held out high claims on public patronage and support.

My attention being thus directed to the subject, I of course made it an object to obtain a solution, and for this purpose I resorted to the well known properties of the lever, supposing it to be sustained in equilibrio by a power applied at different distances from the fulcrum, and acting in given directions. In my first attempts I was not successful; for it did not then occur to me that there was a general term with which the combined effects of all the forces, whatever might be their number, ought to be compared, and this circumstance alone prevented me from obtaining a solution at the time when the problem was proposed.

On a subsequent occasion my attention was again directed to the same object, and having in the interval been shown a drawing, which was intended to illustrate the effects of the new principle as compared with those of the old, I was led to the detection of the general term on which the solution depends, and in a few days after, the theory, as discussed in the following pages, was drawn up.

The manuscript thus completed was laid before Mr. Weale, of the Architectural Library, High Holborn, who expressed a wish to purchase it forthwith, provided Mr. Dredge, who was then in London, would undertake to furnish a drawing and example illustrative of some bridge either erected or in the course of erection.

I accordingly waited on Mr. Dredge, who, in the most affable and condescending manner, accompanied me to the Publisher, and generously offered to supply whatever might be required for elucidation of the system and its application, either in the shape of drawings, specifications, or estimates; and, in accordance with this generous offer, the Contract, Specification of Materials used, and beautiful Isometric Drawing of the Bridge across the River Leven at Balloch Ferry, Dunbartonshire, which are appended to this Essay, have been supplied.

If the theory as here investigated have the effect of establishing the correctness of the principles upon which Mr. Dredge proceeds, and tend in any measure to counteract and remove the prejudices that have been entertained against its introduction by several of the most eminent and skilful Engineers, I shall consider my labours as not having been spent in vain.

W. T.

THE MATHEMATICAL PRINCIPLES

OF

DREDGE'S SUSPENSION BRIDGE.

A NOVEL and elegant principle has lately been adopted in the construction of *Suspension Bridges,*—a principle which promises to be of the greatest utility and importance, both as regards the quantity of material employed, and the stability and strength which it confers upon the structure.

One of the distinguishing features of this very ingenious invention, which is due to Mr. DREDGE, of Bath, consists in making the chains of sufficient magnitude and strength at the points of suspension, to support with safety the greatest permanent and contingent load, to which, under the circumstances of locality, they are ever likely to be exposed; and from thence, to taper or diminish them gradually to the middle of the bridge, where the strain becomes essentially evanescent.

The gradual diminution of the chains, however, is not the only circumstance which characterizes this mode of construction, and marks its superiority over the methods employed by other engineers. The suspending rods or bars that support the platform or road-way, instead of being hung vertically or

at right angles to the plane of the horizon, are inclined to it in angles which vary in magnitude from the abutments to the middle of the bridge, where the obliquity, as well as the stress upon the chains, attains its minimum value.

The principle developed by this obliquity of the suspending rods is singularly beautiful; but much judicious management is necessary on the part of the engineer, to fix upon that degree of obliquity which shall produce the greatest effect. Each bar is considered to perform its part in supporting the load, in proportion to its distance from the abutment, drawn into the sine of the angle of its direction, so that the entire series of suspending bars, transmits the same tension to the points of support as would be transmitted by a single bar reaching from thence to the middle of the bridge.

If this individual bar be considered as a straight inflexible line, the principles of calculation are identical with those of a lever when sustained in equilibrio by a single force applied at the remote extremity, and acting in the direction of the sustaining bar. But when the bar is curved or polygonal, as it necessarily must be in the case of a chain employed in the actual construction of a bridge, the process becomes a little more complicated, since it requires all the composant forces to be referred to the several portions of the chain as resultants; we mean such portions of it as are comprehended between any two contiguous bars. In every other respect, the principles which regulate the calculations are the same; and for this reason, it will be sufficient to establish the theory in reference to the straight line only, since the reader who is familiar with the *Composition* and *Resolution* of *Forces*, will find no difficulty in extending the process to a curve, and he who is not, will derive but little benefit from a perusal of the subject which is now to be laid before him.

Nothing can be more simple than the doctrine of the lever,

when sustained in equilibrio by a single force applied at a given point, and acting in a given direction: this is explained in every treatise on the principles of mechanical science, and is consequently within the reach of every individual connected with that or kindred pursuits: but a more important case of the problem remains to be considered, viz., that in which the equilibrium is maintained by a system of forces applied at different points in the length of the lever, and acting in different directions with respect to the horizon. This is the case that becomes assimilated to a suspension bridge, when the chains and suspending rods are simultaneously called into action in such a manner, that their joint effects shall be competent to maintain the system in a state of balanced rest.

In the case of a single force applied at the remote extremity of the lever, and having its direction inclined to the horizon in a given angle, while the load is applied at the middle of the length, and acting in the direction of gravity. Let A F (fig. 1)

Fig. 1.
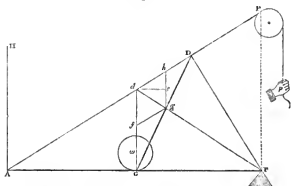
be a lever, having one extremity resting on the fulcrum at F, and conceive it to be sustained in equilibrio by a power or force p applied at A the other extremity, and acting in the direction A P.

Conceive the lever, thus circumstanced, to be a heavy and

perfectly inflexible bar, of uniform figure and density in all its parts, and suppose the whole of its weight to be accumulated in G the centre of gravity; it is then reduced to the case of a straight inflexible lever void of weight, and having a load of given magnitude applied at its middle point.

From the fulcrum F draw the straight line F D perpendicular to A P, the direction of the sustaining force; then, by the principles of plane trigonometry, we have the following proportion, viz.,

$$\text{rad.} : \sin. < \text{F A D} :: \text{F A} : \text{F D}.$$

Or, by reducing the analogy and making radius = 1, it is

$$\text{F D} = \text{F A} \cdot \sin. < \text{F A D}.$$

Now, F D is the perpendicular distance between the fulcrum and the direction in which the force acts; consequently, by the property of the lever,

> *The power acting in the direction A P, is to the weight acting in the direction of gravity, as the distance F G is to the distance F D. That is, the power and the weight are reciprocally as the distances F G and F D.*

Let p = the magnitude of the force which is applied at A, and acting in the direction A P,

d = A F, the whole length of the lever, or the distance from the fulcrum of the point at which the force acts,

ϕ = F A P, the angle of direction, or that contained between the plane of the horizon and A P the direction of the force,

w = the weight of the lever or platform, supposed to be concentrated at G the middle of its length,

$\delta = \frac{1}{2} d$ = F G, the distance between the fulcrum and the point where the weight acts.

Then, by the property of the lever just enunciated, the state of

equilibrium in terms of our notation is expressed by the following analogy, viz.,

$$p : w :: \delta : d \underset{n}{} \sin. \underset{n}{} \phi.$$

Therefore, by multiplying extremes and means, the *equation of condition* is

$$p \underset{n}{} d \underset{n}{} \sin. \underset{n}{} \phi = \delta \underset{n}{} w. \qquad (A)$$

And by division, the value of the suspending power becomes

$$p = \frac{\delta}{d} \cdot w \text{ cosec. } \phi. \qquad (B)$$

Now, by the principles of mechanics, the effect must obviously be the same at whatever point in the line A P the force may be applied; so that, if A P be a cord or chain supporting the weight w by its tension, the measure of that tension is the same at every point, provided that its inclination in respect of the horizon is constantly the same. And if P be a point vertically situated with respect to the fulcrum F, let the cord or chain A P be suspended at P, in such a manner as to be kept perfectly tight by the strain which is excited in maintaining the equilibrium; then the value of the strain upon the point of suspension at P is expressed by equation (B).

Reverting to the equation of condition, and substituting $\tfrac{1}{2} d$ for δ, the expression for the state of equilibrium becomes

$$p \underset{n}{} \sin. \underset{n}{} \phi = \tfrac{1}{2} w, \qquad (C)$$

or, by division, we obtain for the equilibrating power,

$$p = \tfrac{1}{2} w \text{ cosec. } \phi. \qquad (D)$$

This expression for the measure of the power which maintains the system in a state of rest is exceedingly simple; but being limited to the case where the weight acts at the middle of the lever, and the sustaining power at the remote extremity, it will be more advantageous in our subsequent inquiries to retain

the general value, as expressed above, in terms of the respective distances d and δ; because, in as far as the lever is concerned, the symbol δ may partake of all values less than d, the entire length of the bar on which the forces act.

If the power p, instead of acting in the direction A P oblique to the horizon, should act in the direction A H perpendicular to it, then $< \mathrm{F\,A\,H} = \phi = 90°$, and cosec. $\phi = 1$; in which case we have

$$p = \tfrac{1}{2} w. \qquad \text{(E)}$$

This is manifest; for one half the weight is sustained by the fulcrum, and the other half by the power applied at A.

In what precedes, we have established the equation of condition by reference to the principles of the lever only; but the same thing can readily be accomplished by the *Resolution of Forces*, and by the same means we at once obtain the magnitude of the oblique strain upon the fulcrum or abutment, and also the horizontal thrust. Through the point G (fig. 1) draw the straight line G d at right angles to A F, and meeting A P the direction of the power in d. Draw d F and D G, and from the point d on the vertical line d G set off $d f$ at pleasure, to denote the magnitude of the weight w acting in the direction of gravity. Upon $d f$ complete the parallelogram $d f g h$, and $f g$ or $d h$ will represent the magnitude of the force in the direction A P, while the diagonal $d g$ denotes the oblique pressure on the fulcrum, or the magnitude of the force in the direction d F.

Since the angles A D F and A G d are right angles by construction, the quadrilateral figure F D d G can be inscribed in a circle, and because the angles F D G and F d G are subtended by the same chord F G, they are equal between themselves; the angles D F G and $d f g$ are also equal, each of them being equal to the complement of the given angle P A F. Con-

sequently, the triangles FDG and fdg are similar, and their homologous or corresponding sides proportional; so that

$$FD : fd :: FG : fg.$$

Now FD, as we have already seen, is equal to FA. sin. $< FAD = d$ sin. ϕ, and $fd = w$, FG and fg being respectively represented by the symbols δ and p; hence we get

$$d \sin. \phi :: :: \delta : p,$$

from which, by equating the products of the extremes and means, we obtain

$$p \, d \sin. \phi = \delta w. \text{ (the same as equation A).}$$

In the plane triangle dfg we have given the two sides df and fg, with the contained angle dfg, to find the third side dg; and for this purpose, a well known theorem in plane trigonometry gives

$$dg = \left\{ w^2 + p^2 - 2 \, w \, p \sin. \phi \right\}^{\frac{1}{2}} \qquad (F)$$

But, according to equation (B), the value of p in terms of d, δ, w and ϕ is $\dfrac{\delta}{d}. w$ cosec. ϕ; and consequently, its square is $\dfrac{\delta^2}{d^2}. w^2$ cosec.$^2 \phi$; therefore, by substituting these values for p and p^2 within the brackets, we get

$$dg = w \sqrt{1 + \frac{\delta^2}{d^2} \text{cosec.}^2 \phi - \frac{2 \, \delta}{d} \text{cosec. } \phi \sin. \phi}.$$

By the principles of trigonometry, the cosecant of any arc or angle to radius unity, is the same as the reciprocal of the sine to the same radius; hence we have cosec. ϕ sin. $\phi = 1$, so that the expression for the oblique thrust becomes

$$r = \frac{w}{d} \sqrt{d^2 - 2 \, d \, \delta + \delta^2 \text{cosec.}^2 \phi}. \qquad (G)$$

Where the symbol r denotes the resultant of the weight or load w and the oblique force p, and corresponds in magnitude and direction to the oblique thrust on the fulcrum at F.

There is still another quantity remaining to be determined, the magnitude of which may sometimes be required in a case of actual construction; we mean the horizontal thrust upon the abutment, occasioned by the joint effects of the weight and the oblique power, when exerting themselves with full intensity in their respective directions.

Let dg (fig. 1), which represents the oblique thrust upon the abutment, be resolved into the two forces de and ge, the one of them being parallel to the horizon, and the other perpendicular to it; then it is obvious that in so far as the thrust upon the abutment is concerned, the effect of the vertical force is wholly lost, that of the horizontal force only being employed in producing the strain.

Since, by construction, the straight line de is parallel to A F, the angle hde is equal to the angle $PAF = \phi$, and we have already seen, equation (B), that fg or its equal dh is expressed by $\dfrac{\delta}{d} \cdot w \operatorname{cosec}. \phi$; therefore by the principles of plane trigonometry we get

$$\text{rad.} : \frac{\delta}{d} \cdot w \operatorname{cosec}. \phi :: \cos. \phi : de.$$

Therefore, if h be put to denote the horizontal thrust upon the abutment, the reduction of the above proportion will give

$$h = \frac{\delta}{d} \cdot w \operatorname{cosec}. \phi \cos. \phi.$$

But, according to the calculus of sines, the product of the cosine and cosecant of any arc or angle is equal to the cotangent; hence we have $\operatorname{cosec}. \phi \cos. \phi = \cot. \phi$, from which, by substitution, we get

$$h = \frac{\delta}{d_{_n}} . w \cot . \phi_{_n} . \qquad (H)$$

It therefore appears that the equations (B), (G), and (H), exhibit the several particulars required in and arising from the equilibrium of a lever; and in order that these particulars may be clearly understood, we shall now proceed to show in what manner the equations are to be reduced, by applying them to the resolution of a numerical example.

EXAMPLE.—Suppose the length of a lever to be 56 feet, each foot in length being equal to a weight of 40·56 lbs. avoirdupoise ; now, if one extremity of this lever rests upon a fulcrum, while it is sustained in equilibrio by a force applied at the other extremity, and acting in a direction which makes an angle of 32 degrees with the horizon ; what is the magnitude of the sustaining force, and what are the thrusts excited upon the fulcrum, both in reference to the oblique and horizontal direction ?

The first demand of this question is fulfilled by equation (B), the second by (G), and the third by (H) ; in all of which, the value of δ is 28 feet, being equal to one half the length of the lever. And since the system is placed under the same conditions as it would be, if a load equivalent to the weight of the lever were applied at its centre of gravity, the lever itself being then considered as without weight, it follows that

$$w = 56 \times 40.56 = 2271.36 \text{ lbs.}$$

Since the angle of direction of the suspending power is 32 degrees, its natural cosecant is 1·88708, and the numerical expression for the magnitude of the power by which the equilibrium is maintained is

$$p = \frac{28 \times 2271.36 \times 1.88708}{56} = 2143.12 \text{ lbs.}$$

The logarithmic process for the reduction of this expression is as follows, viz.,

$$\left.\begin{array}{llll} \delta = 28 \text{ feet} & \ldots \ldots & \log. & 1\cdot4471580 \\ w = 2271\cdot36 \text{ ℔s.} & \ldots \ldots & \log. & 3\cdot3562859 \\ \phi = 32 \text{ degrees} & \ldots \ldots & \log. \text{ cosec. } 0\cdot2757903 \\ d = 56 \text{ feet} & \ldots \ldots & \text{ar. co. } \log. 8\cdot2518120 \end{array}\right\} \text{add.}$$

Therefore the value of p, the equilibrating power,

  is $2143\cdot12$ ℔s. . . . . log. $3\cdot3310462$ sum.

Hence it appears, that a power of $2143\cdot12$ ℔s., acting at the remote extremity of the lever, and having its direction inclined to the horizon in an angle of 32 degrees, will balance a load of $2271\cdot36$ ℔s. applied at the middle of the length, and acting in the direction of gravity, the lever itself having no weight.

The data remaining as above, the numerical expression for the value of the oblique thrust on the abutment is

$$r = \frac{2271\cdot36}{56}\left\{56^2 - 2\times56\times28 + 28^2\times1\cdot88708^2\right\}^{\frac{1}{2}}$$

By a slight examination of the quantities within the brackets, it will readily appear that the second or negative term is precisely equal to that which precedes it; consequently, they destroy one another, and the expression reduces to the following, viz.,

$$r = \frac{2271\cdot36\times28\times1\cdot88708}{56} = 2143\cdot12 \text{ ℔s.}$$

From this we infer that when the load is applied at the middle of the lever, and the balancing power at the remote extremity, the magnitude of the oblique thrust on the fulcrum is precisely the same as the magnitude of the sustaining power. This is also manifest from the figure; for the triangle $g\,d\,h$ or $d\,g\,f$ is isosceles.

Finally, the data still remaining, the numerical expression for the magnitude of the horizontal thrust on the fulcrum becomes

$$h = \frac{28\times2271\cdot36\times1\cdot6003345}{56} = 1817\cdot47 \text{ ℔s.}$$

Where $1\cdot6003345$ is the natural cotangent of 32 degrees; hence the following logarithmic process,

$$\frac{\delta}{d_n} = \frac{28}{56} \quad . \quad . \quad . \quad . \quad . \quad . \quad \text{log. } 9\cdot6989700$$

$$w = 2271\cdot36 \quad . \quad . \quad . \quad . \quad . \quad . \quad \text{log. } 3\cdot3562859$$

$$\phi_n = 32° \quad . \quad . \quad . \quad . \quad . \quad . \quad \text{log. cot. } \underline{0\cdot2042108}$$

Therefore the value of h, the horizontal thrust, is

$$1817\cdot47 \text{ lbs.} \quad . \quad . \quad . \quad . \quad . \quad . \quad \text{log. } 3\cdot2594667 \text{ sum.}$$

The preceding investigation has reference only to the weight of the lever or platform, which is constantly the same; but in the case of a bridge, this constancy of weight cannot obtain by reason of the transit loads to which it is exposed; and as the loads of transit are continually varying their distances from the fulcrum, and thereby producing different effects at every instant, it becomes necessary, in order to render our investigation complete, to show in what manner these effects are to be estimated, and incorporated with the effect produced by the weight of the platform.

Let w (fig. 1^a), denote the weight equivalent to that of the

Fig. 1^a.

platform, applied at G the centre of gravity or middle point of the lever, and let w' be any other load applied at the point H.

Then it is manifest, from the principles of the lever, that the two weights w and w' will, according to their situations, perform the same office in equipoising the system, as would be performed by a single weight equivalent to their sum applied at E their common centre of gravity, and acting in a direction perpendicular to the horizon. Divide the distance G H into two parts G E and H E, which are to one another reciprocally as the weights applied at G and H; then is E the position of the load, which is equivalent to $w + w'$. Through the point E, and perpendicular to F A, draw the straight line E K, meeting A P in K; and let F D be perpendicular to A P. Draw D E and F K, and upon K E set off K f, equal to the compound load $w + w'$, and complete the parallelogram K $f g h$; then will $f g$ or K h denote the force in direction A P, and K g the oblique pressure on the fulcrum at F, arising from the conjoint action of the constant weight w and the extraneous weight w'. Through the point K draw K e at right angles to $h g$, and K e will denote the horizontal thrust upon the fulcrum, produced by the conjoint action of the two forces already specified; and if the load w' should move forward or backward to any other point of the lever, the same mode of construction will still apply, so that the principle is general, whether the load be constant or variable.

If the symbol δ denote the distance F E between the fulcrum F and the common centre of gravity of the two weights w and w', the other quantities remaining as before, then the equation of *condition* for the constant and variable load becomes

$$p \, \underset{n}{d} \sin. \, \underset{n}{\phi} = \delta \, (w + w'), \qquad (\mathrm{H}^a)$$

and the absolute value of the force in direction A P is

$$p = \frac{\delta}{\underset{n}{d}} \cdot (w + w') \operatorname{cosec.} \underset{n}{\phi}. \qquad (\mathrm{H}^b)$$

In the next place, instead of the lever being sustained in

equilibrio by a single power p, applied at A and acting in
the direction A P (fig. 2), let us suppose that the equilibrium is

Fig. 2.
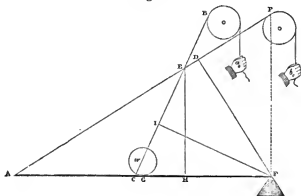
produced by the joint effects of two forces b and a, the one
being applied at A the extremity of the lever, and acting in
the direction A P, while the other is applied at some intermediate
point of the lever, as C, and acting in the direction C B, the
angles of inclination P A F and B C F being respectively de-
noted by the symbols ϕ and ϕ, while the distances A F and
C F are indicated by d and d, the symbol δ being the same as
in the preceding case; namely, the distance between the ful-
crum and the point where the weight acts; that is, the distance
G F.

Let the point C, at which the subsidiary force a is applied,
lie between the points A and G; that is, between the middle of
the lever and its extreme point at A; then, since the mag-
nitude of the weight w and its distance from the fulcrum
are the same as before, its effect upon the lever will manifestly
be the same also, and consequently the joint effects of the two
forces b and a, which produce the equilibrium in this case, will

be equivalent to the effect of the single force p, by which it was previously produced.

But by the laws of mechanics the effect of any force which acts upon a lever at a given distance from the fulcrum, and in a given direction,—

> *Is expressed by the magnitude of the given force, drawn into the distance between the fulcrum and the point at which it acts, and again into the sine of the angle of its direction.*

We have already seen, equation (A), that the effect of a single force which balances the weight of the lever is expressed by $p\,d$ sin. ϕ; this, therefore, is the quantity to which the effects of the forces b and a, now balancing the weight, must be equal, and with which they must jointly be compared.

Now, by the property of the lever as above enunciated, the effect of the force b applied at A, and acting in the direction A P, is $b\,d$ sin. ϕ, the distance A F and angle P A F being the same as before. And in like manner the effect of the force a applied at the point C, and acting in the direction C B, is $a\,d$ sin. ϕ; consequently, by taking the sum of these effects, the equation of condition or equilibrium in the case of two sustaining forces becomes

$$a\,d \text{ sin. } \phi + b\,d \text{ sin. } \phi = p\,d \text{ sin. } \phi.$$

But by equation (A) we have $p\,d$ sin. $\phi = \delta\,w$; consequently, by substitution, we obtain

$$a\,d \text{ sin. } \phi + b\,d \text{ sin. } \phi = \delta\,w. \qquad \text{(I)}$$

The composition of this equation is very simple; for from the fulcrum F draw the straight lines F D and F I respectively perpendicular to A P and C B, the direction in which the forces

act. Then, since $A F = d$ and $C F = d$, while the angles $P A F$ and $B C F$ are respectively denoted by the symbols ϕ and ϕ, it follows from the principles of plane trigonometry, that

$$F D = d \sin. \phi, \quad F I = d \sin. \phi.$$

And multiplying these distances by the magnitudes of the respective powers, the products will indicate the mechanical effects, and the sum of those effects must be equal to the magnitude of the weight w drawn into the distance $F G$; and this equality constitutes the equation of *condition* or *equilibrium* given above.

If we transpose the first term of equation (I), the effect of the force b becomes

$$b \, d \sin. \phi = \delta \, w - a \, d \sin. \phi,$$

and by division we obtain

$$b = \frac{\delta \, w - a \, d \sin. \phi}{d \sin. \phi}.$$

But, according to the calculus of sines, the sine and cosecant of any arc or angle to radius unity are reciprocally equal; consequently, a more elegant expression for the magnitude of b is that which follows, viz.,

$$b = \frac{\left(\delta \, w - a \, d \sin. \phi \right) \operatorname{cosec.} \phi}{d}. \qquad (\mathrm{K})$$

This supposes the magnitude of the force a, as well as all the other quantities composing the equation b, to be known; but if b be the given force, the equation expressing the value of a becomes

$$a = \frac{\left(\delta \, w - b \, d \sin. \phi \right) \operatorname{cosec.} \phi}{d}. \qquad (\mathrm{L})$$

If the equations (B) and (K) be compared with each other, it will readily appear that the former exceeds the latter by the quantity $\dfrac{a_{_0}\, d_{_0} \sin. \phi_{_0}}{d_{_n}} \times \operatorname{cosec.} \phi_{_n}$; for it is obvious that

$$p - b_{_0} = \frac{\delta}{d_{_n}} \cdot w \operatorname{cosec.} \phi_{_n} - \frac{(\delta\, w - a_{_0}\, d_{_0} \sin. \phi_{_0})\operatorname{cosec.} \phi_{_n}}{d_{_n}} = \frac{a_{_0}\, d_{_0} \sin. \phi_{_0} \operatorname{cosec.} \phi_{_n}}{d_{_n}}.$$

We therefore infer, that in the case of a single subsidiary force $a_{_0}$ as in fig. 2, the tension upon the cord or chain A P is less than the tension in fig. 1, by the quantity

$$\frac{a_{_0}\, d_{_0} \sin. \phi_{_0} \operatorname{cosec.} \phi_{_n}}{d_{_n}},$$

so that the diameter or section of the cord or chain may be diminished in the same proportion, the force in the direction C B diminishing the strain to that extent.

If the force $a_{_0}$, which is applied at the point C, have its direction perpendicular to the length of the lever A F; then sin. $\phi_{_0} = 1$, and the effect in that case is simply $a_{_0}\, d_{_0}$ instead of $a_{_0}\, d_{_0} \sin. \phi_{_0}$, and the corresponding value of b is therefore

$$b_{_0} = \frac{(\delta\, w - a_{_0}\, d_{_0}) \operatorname{cosec.} \phi_{_n}}{d_{_n}}. \qquad \text{(M)}$$

If the equations (B) and (M) be now compared with each other, it will be seen that the former exceeds the latter by the quantity $\dfrac{a_{_0}\, d_{_0} \operatorname{cosec.} \phi_{_n}}{d_{_n}}$; for, by subtraction, it is

$$p - b_{_0} = \frac{\delta}{d_{_n}} \cdot w \operatorname{cosec.} \phi_{_n} - \frac{(\delta\, w - a_{_0}\, d_{_0}) \operatorname{cosec.} \phi_{_n}}{d_{_n}} = \frac{a_{_0}\, d_{_0} \operatorname{cosec.} \phi_{_n}}{d_{_n}}.$$

Now, when the angle of inclination $\phi_{_0}$ is of any magnitude

whatever less than 90 degrees or a right angle, sin. ϕ_o is less than unity, and, consequently, this last remainder is greater than the former by the quantity $\dfrac{a_o\,d_o\ \text{cosec.}\ \phi_o}{d_n}(1-\sin.\ \phi_o)$; for by subtraction we get

$$\frac{a_o\,d_o\ \text{cosec.}\ \phi_o}{d_n}-\frac{a_o\,d_o\ \sin.\ \phi_o\ \text{cosec.}\ \phi_o}{d_n}=\frac{a_o\,d_o\ \text{cosec.}\ \phi_n}{d_n}(1-\sin.\ \phi_o).$$

From this we infer that when the direction of the force a_o is perpendicular to the lever, the magnitude of the force b_o in direction A P necessary to maintain the equilibrium, is less than when the direction of the force a is oblique. This inference, at first sight, would seem to be at variance with the principles insisted on by Mr. Dredge; and it manifestly is so, if we conceive the vertical and oblique forces to be applied at the same point of the lever; but if we suppose them to be referred to the same point of the cord or chain A P, the case will be very different; for then the quantity indicated by the symbol d diminishes, and the quantity of diminution is proportional to the cosine of the inclination or obliquity. For, draw the perpendicular E H, then C F is the length of the lever in the case of the oblique force in direction C E, and H F its length for the vertical force in direction H E; but C H = C F − H F, and C H = C E cos. ϕ_o; for, by the principles of plane trigonometry, it is

$$\text{rad.}\ :\ \text{C E}\ ::\ \text{cos.}\ \phi_o\ :\ \text{C H} = \text{C E cos.}\ \phi_o.$$

In this equation, however, the quantity C E is still unknown, but it may be determined in the following manner:

$$\text{A C} = \text{A F} - \text{C F} = d_n - d_o$$

and by the property of the plane triangle, as demonstrated in the 32nd proposition of the first book of Euclid's Elements of Geometry, the angle E C F is equal to the sum of the angles E A C and A E C ; therefore by transposition it is

$$A E C = \phi_0 - \phi_n,$$

and by trigonometry we have

$$\sin. \left(\phi_0 - \phi_n\right) : d - d_0 :: \sin. \phi_n : C E,$$

and by reducing the analogy it becomes

$$C E = \frac{\left(d_n - d_0\right) \sin. \phi_n}{\sin. \left(\phi_0 - \phi_n\right)}. \qquad (N)$$

Let this value of C E be substituted instead of it in the above value of C H, and we obtain

$$C H = \frac{\left(d_n - d_0\right) \sin. \phi_n \cos. \phi_0}{\sin. \left(\phi_0 - \phi_n\right)}. \qquad (O)$$

By a well known theorem in the calculus of sines, we have

$$\sin. \left(\phi_0 - \phi_n\right) = \sin. \phi_0 \cos. \phi_n - \cos. \phi_0 \sin. \phi_n ;$$

therefore, by substitution, we get

$$C H = \frac{\left(d_n - d_0\right) \sin. \phi_n \cos. \phi_0}{\sin. \phi_0 \cos. \phi_n - \cos. \phi_0 \sin. \phi_n},$$

and by expunging the factor sin. ϕ_0 cos. ϕ_n from both terms of the fraction, it finally becomes

$$C H = \frac{d_n - d_0}{\tan. \phi_0 \cot. \phi_n - 1}. \qquad (P)$$

If from C F the leverage for the oblique force in direction C B, we subtract the value of C H, as found above, the remainder H F will be the leverage for the vertical force in direction H E. Thus we have

$$\text{H F} = \frac{d \tan. \phi_0 \cot. \phi_n - d}{\tan. \phi_0 \cot. \phi_n - 1}. \qquad \text{(Q)}$$

When the value of the distance H F, as found above, is less, equal to, or greater than $\text{F I} = d \sin. \phi_0$, the effect of the vertical force will be less, equal to, or greater than that of the oblique force; by this we mean, that the magnitude of the force being the same in both cases, its effect in the vertical direction will be less, equal to, or greater than its effect in the oblique direction, according as H F is less, equal to, or greater than F I.

Since E is a fixed point through which the directions of both the vertical and oblique forces must pass, it follows that while the distance F H is constant, the distance F C may partake of all magnitudes between F A and F H, while the angle E C F may librate between the angles F H E and F A P; that is, it may vary from a right angle to ϕ_0, which is its minimum limit.

From this view of the subject it is obvious that the perpendicular F I depends upon the magnitude of the angle E C F; and because the point C may move either towards A or H, while the straight line C B passes constantly through E, it follows, that the inclination admits of such a magnitude as to give the force in the direction C B a maximum effect; that is, when $d \sin. \phi_0$ is a maximum or the greatest possible.

The method of determining the angle which gives to the oblique force its maximum effect is very simple; but if such a principle were adopted in the construction of suspension bridges, the results in many instances would differ very widely from the practice of the inventor, and especially as applied to the suspending rods in the *Victoria Bridge* across the Avon at Bath.

From drawings which we have seen of that structure, it would appear that the angles of direction diminish according to some law, as we recede from the abutments towards the centre

of the bridge; but in making the obliquity such as to give the force in any direction its maximum effect, the angles continually increase instead of decreasing, as will become manifest from the following constructions.

Let A F (fig. 3) be a lever resting on the fulcrum at F, and

Fig. 3.
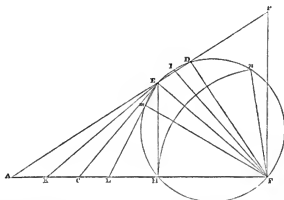
sustained in equilibrio by a cord or chain applied at A, and fastened to a hook or some other immoveable object at P.

Let E be any point in the length of the cord, at which a subsidiary force is to be applied in order to lessen the strain upon A E, the lower portion thereof. The point C is required, so that C E being joined, a given force acting in the direction C E may produce a maximum effect.

Draw the straight line F E to connect the fulcrum with the given point, and through the point E, draw E C at right angles to F E, and meeting the lever A F in C; then is C E the direction of the force required. Upon F E, as a diameter, describe the circle F H E, intersecting the lever in the point H, and draw E H; then is E H perpendicular to the lever in H, so that H E would be the direction of the vertical force passing through E the given point.

If the point C be supposed to move towards A in such a

manner that C E may become K E; then it is manifest that K E produced will intersect the circumference of the circle again in I; draw F I, and F I will be perpendicular to K E, the direction of the given force; this is obvious, for the angle in a semicircle is a right angle. Now F I is manifestly less than F E, for F E is the diameter of the circle F H E, and by the property of the circle, the diameter is the greatest chord that can be inscribed in it. When the point K coincides with A, the point I coincides with D, in which case $F D = d \sin \phi$.

Again, suppose the point C to move towards H until it arrives at the point L; then L E being drawn will necessarily intersect the circumference of the circle in the point m. Draw F m, which, by the property of the circle, will be perpendicular to L E, the direction of the given force supposed to be applied at L. Now, since F E is the diameter of the circle F H E, and F m any chord in it not passing through the centre, F E is greater than F m; but it has also been shown to be greater than F I; and since the effect of the force in the directions K E, C E, and L E, is represented by the perpendiculars F I, F E, and F m, it follows, that the effect in the direction C E is a maximum; hence the truth of the construction is manifest. When the point L coincides with H, the straight line L E coincides with H E, and H E becomes the direction of the vertical force, the effect of which is represented by F H.

Since H and D are the points in which the circle is intersected by the lever A F, and the cord or chain A P, it follows, that the effect of the given force may be represented by all the chords that can be drawn in the circle between the points D and H, F D being the minimum value when the point C moves towards A, and F H the minimum value when it moves in the opposite direction. And all these values will manifestly be greater than F H; for from the centre F with the distance F H, describe the arc H n intersecting the circumference of the

circle in n; then it is evident that all the chords originating at F, and meeting the circumference between the points n and H, must be greater than Fn or F H. Thus far, therefore, there is a manifest advantage in causing the force to act in the oblique direction.

The preceding construction determines the point in the lever at which the oblique force must be applied to produce a maximum effect for all points in the cord or chain between A and D; but it does not apply to points on the opposite side of D towards P, for in that case the direction of the force would meet the lever on the opposite side of A, which is manifestly contrary to the conditions of the problem as applied to the construction of bridges; for all the suspending bars on one side are supposed to meet the platform between the abutment and the middle of the bridge. The fact is, the direction which gives the maximum value is the direction of the cord itself, the force being applied at the point A; this will be obvious from the subjoined construction.

Let A F (fig. 4) be the lever resting upon the fulcrum at F,

Fig. 4.

and A P the direction of the force, which, acting singly at A, maintains the equilibrium. Let C be the point at which the subsidiary force is applied, and C E the direction in which it

acts; then, *it is proposed to show, that the greatest effect will be produced by the given power when it acts in the direction* A E *coincident with the cord or chain* A P.

Draw the straight line F E, connecting the fulcrum with that point in the cord through which the direction of the force passes, and upon F E as a diameter describe the circle F H D E, intersecting the lever A F in the points F and H; the cord A P in the points D and E, and C E the direction of the force in the point I. Draw F I, F D, and E H, these will respectively be perpendicular to the lines C E, A P, and A F. Now, it is obvious, that if the point C moves along the lever A F, either towards A or H, the straight line C E will intersect the circle in points towards D or H accordingly, and the perpendicular F I will increase or diminish according as the intersections fall towards D or H.

When the point C coincides with A the extremity of the lever, the straight line C E will coincide with A E, the direction of the cord, and the perpendicular F D will then attain its maximum value; hence the truth of the proposition is manifest.

Again, when the point C coincides with the point H, the straight line C E will coincide with the perpendicular· H E; and in that case the value of F H is a minimum; from which we infer that in all cases where the direction of the subsidiary force intersects the cord between the points D and P, the effect is the least possible when the force is exerted in a vertical direction.

In both the preceding constructions the position of the point E has been so assumed as to give the force, when acting in an oblique direction, a greater effect than when it acts in a vertical direction; and lest the inattentive reader should imagine that this is universally the case, we shall, in what immediately follows, endeavour to show that the effect of the

force acting vertically, may also be either equal to or greater than the effect of the same force acting obliquely, when the directions in both cases pass through the same point of the cord.

Let A F (fig. 5) be the lever, similarly situated as in all

- Fig. 5. -
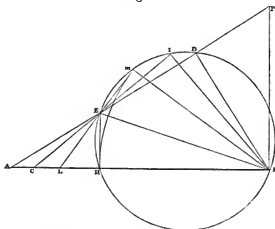
the preceding cases, A P being the direction of the single equilibrating power. Take any point E in A P, and let the point E thus assumed be that through which the direction of the subsidiary force has to pass.

Draw F E, and upon F E as a diameter describe the circle F H E D, intersecting the lever in F and H, and the cord or chain A P in E and D. Let C be any point in the lever at which the subsidiary force is applied, and through the point E draw the straight line C E, meeting the circumference of the circle in I; then is C E the direction of the force, and F I perpendicular to C I, the representative of its effect. About the fulcrum F as a centre, with the distance F H describe the arc H m intersecting the circumference of the circle in m, and draw the straight lines F m and m E L; then is L E the direction of the oblique force acting at the point L, and the perpendicular

F m is the representative of its effect. But F m is equal to F H by the construction, and F H denotes the effect of the vertical force applied at H, and having its direction passing through E, the given point; therefore, in this case, the effects of the vertical and oblique forces are the same.

Now, it is manifest from the figure that the chord F m is greater than any other chords that can be drawn from the fulcrum F to terminate in the arc m D; therefore F m is greater than F I; but F I is the representative of the effect produced by the oblique force acting at C in the direction C E, and F m, as we have just shown, denotes the effect of the vertical force acting at H in the direction H E; so that the effect of the oblique force may be either greater, equal to, or less than that of a vertical force of the same magnitude, supposing the directions in which they act to pass through the same point.

Having thus demonstrated the conditions that must be satisfied in order to produce a maximum effect, and having shown that the value of the oblique force may be either equal to, greater, or less than that of the vertical force whose direction passes through the same point of the cord, it now remains for us to show in what manner the several equations which we have investigated are to be reduced.

EXAMPLE.—Let the length of the lever, its weight, and the value of the angle ϕ remain, as in the example under equation (II), and suppose a subsidiary force a to be applied at C at the distance of 26·5 feet from A the remote extremity of the lever, and having its direction passing through E at a distance of 44 feet from the point A (see fig. 2 preceding). It is required to determine the value of the force b, or the tension upon the lower portion of the cord A E, on the supposition that the required force acting in direction A E, produces the same effect in maintaining the equilibrium, as the force a acting in direction C E.

The first step to be performed in the resolution of this example is to determine the angle $F\,C\,E = \phi$; and for this purpose we have given the length of the lever $F\,A = 56$ feet, and the angle $F\,A\,P = 32$ degrees; therefore, by the rules of plane trigonometry, we have

$$A\,P = 56 \text{ sec. } 32°, \text{ and } F\,P = 56 \text{ tan. } 32°.$$

These lines, however, are not necessary in the calculation; because, from the right-angled triangle $A\,H\,E$, the quantities $A\,H$ and $H\,E$ can be found directly from the data, without having recourse to similar triangles: thus we get

$$A\,H = 44 \text{ cos. } 32°, \text{ and } H\,E = 44 \text{ sin. } 32°;$$

the absolute numerical values being $44 \times \cdot8480481 = 37\cdot3141164$, and $44 \times \cdot5299193 = 23\cdot3164492$ feet respectively. Therefore, by subtraction, it is $C\,H = 37\cdot3141164 - 26\cdot5 = 10\cdot8141164$ feet; consequently, by trigonometry, we have

$$\frac{H\,E}{C\,H} = \frac{23\cdot3164492}{10\cdot8141164} = 2\cdot1561122 = \tan. \phi = \tan. 65° 7' 5''.$$

Having thus determined the angle of direction for the subsidiary force a, the equations by which the actual values of a and b are to be found are the following, viz.,

$$a\,d \text{ sin. } \phi = b\,d \text{ sin. } \phi,$$
$$\text{and } a\,d \text{ sin. } \phi + b\,d \text{ sin. } \phi = p\,d \text{ sin. } \phi = \delta\,w,$$

or, by substituting in this last equation the effect of the force a in the first, we get

$$2\,b\,d \text{ sin. } \phi = \delta\,w.$$

Therefore, by restoring the numerical values of the several given quantities, the corresponding value of b becomes

$$b = \frac{28 \times 2271\cdot36}{2 \times 56 \times \cdot5299193} = \frac{567\cdot84}{\cdot5299193} = 1071\cdot56 \text{ lbs.}$$

Here, then, we have a strain of $1071\cdot56$ lbs. upon the lower

part of the cord; but by the example under equation (H),
we found the strain throughout the cord with only one equi-
librating force to be $p = 2143 \cdot 12$ lbs., and this corresponds to
the tension on the upper part in the present instance; hence it
appears that by the application of the oblique force a_0, the
lower part of the cord is relieved of a strain equal to $2143 \cdot 12 -
1071 \cdot 56 = 1071 \cdot 56$ lbs., being just half the original tension; and,
consequently, the strength of the cord may be diminished in
the same proportion.   To find the magnitude of the force a_0
which acts in the direction C E, we must have recourse to the
equation

$$a_0 \, d_0 \sin. \, \phi_0 = b_0 \, d_0 \sin. \, \phi.$$

Now d_0, the distance between the fulcrum and the point
in the lever where the force a_0 acts, is $d = A\,F - A\,C = C\,F = 56
- 26 \cdot 5 = 29 \cdot 5$ feet; therefore, by substituting the several nume-
rical values in the above equation, the value of a_0 becomes

$$a_0 = \frac{1071 \cdot 56 \times 56 \times \cdot 5299193}{29 \cdot 5 \times \cdot 9071767} = 1188 \cdot 23 \text{ lbs. nearly.}$$

Suppose, now, that the magnitude of the force a_0 and the
angle of its direction are actually given by the question, instead
of being determined by calculation as above, then the value
of the force b_0 will be found as follows from equation (K), where
we have

$$b_0 = \frac{(28 \times 2271 \cdot 36 - 1188 \cdot 23 \times 29 \cdot 5 \times \cdot 9071767) \times 1 \cdot 8870799}{56} = 1071 \cdot 56 \text{ lbs.}$$

If the direction of the force a_0 forms with the lever an angle of
$90°$, then by equation (M) the value of b_0 becomes

$$b_0 = \frac{(28 \times 2271 \cdot 36 - 1188 \cdot 23 \times 18 \cdot 6858836) \times 1 \cdot 8870799}{56} = 1394 \cdot 92 \text{ lbs.}$$

The difference between the two values of b found above is $1394 \cdot 92 - 1071 \cdot 56 = 323 \cdot 36$ lbs., from which the advantage of using the force a in the oblique direction becomes manifest.

In the preceding process we have taken the value of d $= 18 \cdot 6858836$ feet, being equal to the difference between the whole length of the lever F A and A H; that is, F H $= 56$ $- 37 \cdot 3141164 = 18 \cdot 6858836$; but the same thing may be determined directly from the data by equation (Q), on the supposition that the angle of direction when the force a acts obliquely is known; that is, the value of the force b corresponding to the vertical action of the force a can be determined from the oblique action of a without any previous calculation, by the following formula:

$$ b = \frac{\operatorname{cosec.} \phi}{d} \left\{ \partial w - \frac{a \, (d \tan. \phi \cot. \phi - d)}{\tan. \phi \cot. \phi - 1} \right\}. $$

An equation which is very easily reduced by substituting the respective numbers as indicated by the combinations.

Let us now suppose that another subsidiary force as a (fig. 6)

Fig. 6.
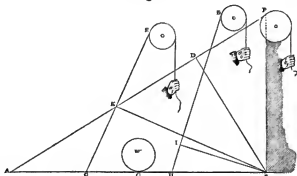
is added to the system, applied at the point C, and acting

in the direction C E. Then, since the weight of the lever remains the same, as well as the distance from the fulcrum of the point in which it is conceived to be concentrated, it will constantly require the same amount of power to effect the equilibrium, whatever may be the number of forces employed, in whatsoever manner they may be applied, and in whatever directions they may act.

With regard to the present case, with two subsidiary forces a and a acting in the directions H B and C E, and the third force b acting in the direction A P, it will require the conjoint effects of all the three to maintain the equilibrium; that is, it will require the effect of the force a in the direction H B, together with the effect of a in the direction C E, and that of b in the direction A P.

Now, by the notation already established, we have the angle F H B $= \phi$ and the distance F H $= d$, while the angle F A P $= \phi$ and the distance F A $= d$. In like manner let the angle F C E be denoted by ϕ, and the distance F C by d; then, if from the fulcrum F the perpendiculars F I, F K, and F D be respectively drawn, and each of them multiplied by the magnitude of its corresponding force, the equation of *equilibrium* arising from their conjoint effects becomes

$$a \, d \sin. \phi + a \, d \sin. \phi + b \, d \sin. \phi = \delta w. \qquad (R)$$

Therefore, by reducing this equation in respect of b we obtain

$$b = \frac{(\delta w - a \, d \sin. \phi - a \, d \sin. \phi) \operatorname{cosec.} \phi}{d}. \qquad (S)$$

If the equations (K) and (S) are compared with each other, it will be seen that the former exceeds the latter by the quantity

$$\frac{a_1 d_1 \sin.\,\phi\,\text{cosec.}\,\phi_n}{d_n},$$

for by subtraction we have

$$b_0 - b_1 = \frac{(3w_0 - a_0 d_0 \sin.\,\phi - a_0 d_0 \sin.\,\phi)\,\text{cosec.}\,\phi_n}{d_n} - \frac{(3w_0 - a_0 d_0 \sin.\,\phi - a_1 d_1 \sin.\,\phi)\,\text{cosec.}\,\phi_n}{d_n} = \frac{a_1 d_1 \sin.\,\phi\,\text{cosec.}\,\phi_n}{d_n}.$$

Consequently, the tension on the cord or chain A P, when there are two subsidiary forces a_0 and a_1, is less than when there is only one subsidiary force, as a_0. The cord in the latter case may therefore be made smaller than it is in the former, for since there is less strain there is no necessity for so much strength.

If, instead of supposing the cords, to which the subsidiary forces are attached, to be brought over pulleys and stretched according to the intensity of their respective forces, let them be simply attached to the primary cord or chain A P, as represented in figs. 7 and 8 following; then, if they be stretched to the same degree by means of the load which they are employed to support, the nature of the action will be precisely the same as indicated in figs. 2 and 6, and the whole strain will be thrown upon the point of suspension at P, in the same

Fig. 7.
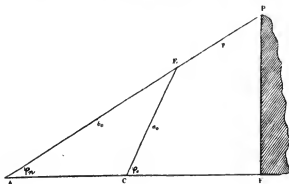
Fig. 8.
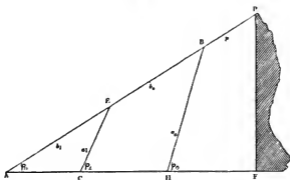
manner as if it were transmitted through the suspending bars of a bridge. From these two cases of subsidiary forces, as compared with each other, and also with the case of a single force, the law by which the tension on the cord or chain decreases becomes manifest; it is therefore unnecessary to pursue the investigation further, for by merely extending the notation the successive terms of the series can be obtained from each other by simple induction.

We shall give a tablet of the terms as far as seven subsidiary forces, which we presume will be amply sufficient to enable the attentive reader to detect the law by which the strain diminishes; and this law being once discovered, its application to the construction of suspension bridges becomes a matter of obvious utility. The series of equations denoting the state of equilibrium are as follow:

Force in the direction of the cord or chain . . . . $p\,d\sin.\phi_n = \delta\varpi_n$

Ditto with one subsidiary force . . . . $a\,d\sin.\phi_{9\,0} + b\,d\sin.\phi_{9\,n} = \delta\varpi_n$

Ditto with two subsidiary forces . . . . $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + b\,d\sin.\phi_{1\,n} = \delta\varpi_n$

Ditto with three subsidiary forces . . . . . $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + a\,d\sin.\phi_{2\,2} + b\,d\sin.\phi_{2\,n} = \delta\varpi_n$

Ditto with four subsidiary forces . . . $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + a\,d\sin.\phi_{2\,2} + a\,d\sin.\phi_{3\,3} + b\,d\sin.\phi_{3\,n} = \delta\varpi_n$

Ditto with five subsidiary forces . $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + a\,d\sin.\phi_{2\,2} + a\,d\sin.\phi_{3\,3} + a\,d\sin.\phi_{4\,4} + b\,d\sin.\phi_{4\,n} = \delta\varpi_n$

Ditto with six subsidiary forces $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + a\,d\sin.\phi_{2\,2} + a\,d\sin.\phi_{3\,3} + a\,d\sin.\phi_{4\,4} + a\,d\sin.\phi_{5\,5} + b\,d\sin.\phi_{5\,n} = \delta\varpi_n$

Ditto with seven subsidiary forces $a\,d\sin.\phi_{0\,0} + a\,d\sin.\phi_{1\,1} + a\,d\sin.\phi_{2\,2} + a\,d\sin.\phi_{3\,3} + a\,d\sin.\phi_{4\,4} + a\,d\sin.\phi_{5\,5} + a\,d\sin.\phi_{6\,6} + b\,d\sin.\phi_{6\,n} = \delta\varpi_n$

If we transpose this class of equations in such a manner that the terms involving the quantity b with its several characteristics may stand alone on one side, the effects of the forces on the successive portions of the cord A P, estimated in order from the point of suspension, will become obvious. The transposed equations are as below, having 7 instead of n, that being its numerical value for a system of eight forces.

$$p\,d\sin\phi_7 = \delta w_7$$

$$\delta d\sin_0\phi_7 = \delta w_7 - \alpha d\sin_0\phi_0$$

$$\delta d\sin_1\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1)$$

$$\delta d\sin_2\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1 + \alpha d\sin_2\phi_2)$$

$$\delta d\sin_3\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1 + \alpha d\sin_2\phi_2 + \alpha d\sin_3\phi_3)$$

$$\delta d\sin_4\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1 + \alpha d\sin_2\phi_2 + \alpha d\sin_3\phi_3 + \alpha d\sin_4\phi_4)$$

$$\delta d\sin_5\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1 + \alpha d\sin_2\phi_2 + \alpha d\sin_3\phi_3 + \alpha d\sin_4\phi_4 + \alpha d\sin_5\phi_5)$$

$$\delta d\sin_6\phi_7 = \delta w_7 - (\alpha d\sin_0\phi_0 + \alpha d\sin_1\phi_1 + \alpha d\sin_2\phi_2 + \alpha d\sin_3\phi_3 + \alpha d\sin_4\phi_4 + \alpha d\sin_5\phi_5 + \alpha d\sin_6\phi_6)$$

The foregoing may be considered as a mathematical illustration of the principle upon which the tapering of the chain depends; but the subject is still involved in difficulty as regards the distribution of the forces, and the position of the oblique suspending rods; for here there is no conditional equation to direct us, and on this account the successful application of the principle to practice, must in a great measure depend upon the sagacity and skill of the engineer by whom the fabric is raised.

In our humble opinion, a system of calculation may be instituted upon the principle of making the angles of direction vary by a constant second difference, at equidistant points along the platform, the limiting angles

being adapted to the circumstances of construction, which must of course be fixed upon before any calculation whatever can be made.

Another condition in the system of calculation might be, to have the effects of all the suspending forces equal; we do not mean the absolute magnitude of the forces, but the effects as referred to their particular directions, when compared with the state of equilibrium; this would manifestly give a series of equal differences for the tensions on the chain A P.

If the several equations above given be successively subtracted from one another, the series of corresponding remainders will stand as below, viz.:—

$$(p - b_0)\, d_7 \sin. \phi_7 = a_0 d_0 \sin. \phi_0$$
$$(b_0 - b_1)\, d_7 \sin. \phi_7 = a_1 d_1 \sin. \phi_1$$
$$(b_1 - b_2)\, d_7 \sin. \phi_7 = a_2 d_2 \sin. \phi_2$$
$$(b_2 - b_3)\, d_7 \sin. \phi_7 = a_3 d_3 \sin. \phi_3 \qquad (T)$$
$$(b_3 - b_4)\, d_7 \sin. \phi_7 = a_4 d_4 \sin. \phi_4$$
$$(b_4 - b_5)\, d_7 \sin. \phi_7 = a_5 d_5 \sin. \phi_5$$
$$(b_5 - b_6)\, d_7 \sin. \phi_7 = a_6 d_6 \sin. \phi_6$$

And if these equations be severally divided by the constant quantity $d_7 \sin. \phi_7$, the actual values of the differences will be as follows:—

$$p - b_0 = \frac{a_0 d_0 \sin. \phi_0 \, \mathrm{cosec.}\, \phi_7}{d_7}$$

$$b_0 - b_1 = \frac{a_1 d_1 \sin. \phi_1 \, \mathrm{cosec.}\, \phi_7}{d_7}$$

$$b_1 - b_2 = \frac{a_2 d_2 \sin. \phi_2 \, \mathrm{cosec.}\, \phi_7}{d_7}$$

$$b_2 - b_3 = \frac{a_3 d_3 \sin. \phi \text{ cosec. } \phi_7}{d_7} \qquad (U)$$

$$b_3 - b_4 = \frac{a_4 d_4 \sin. \phi \text{ cosec. } \phi_7}{d_7}$$

$$b_4 - b_5 = \frac{a_5 d_5 \sin. \phi \text{ cosec. } \phi_7}{d_7}$$

$$b_5 - b_6 = \frac{a_6 d_6 \sin. \phi \text{ cosec. } \phi_7}{d_7}$$

Consequently, the difference of the strains upon the first and last portions of the cord becomes

$$p - b_6 = \left\{ \frac{a_0 d_0 \sin. \phi + a_1 d_1 \sin. \phi + a_2 d_2 \sin. \phi + a_3 d_3 \sin. \phi + a_4 d_4 \sin. \phi + a_5 d_5 \sin. \phi + a_6 d_6 \sin. \phi}{d_7} \right\} \text{cosec. } \phi_7$$

The following drawing will represent the several quantities involved in the equations, and the tapering plan of the chain will indicate the manner in which the strain diminishes by the application of the subsidiary forces.

ELEVATION.
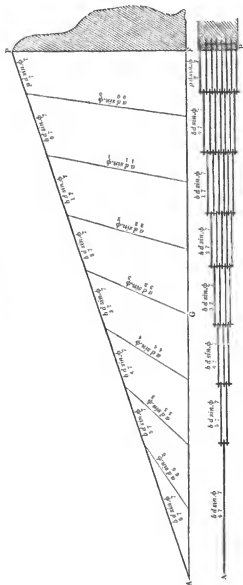
PLAN OF THE CHAIN.

The following numerical example may be useful in showing how a calculation is to be instituted, supposing that the conditions previously mentioned are admitted as being sufficient to guide the operations of practice in a case of actual construction.

EXAMPLE.—Let A F in the preceding figure be equal in length to 120 feet, and suppose it to be a straight inflexible lever entirely divested of weight and moveable about the fulcrum at F. Let the distance A F be divided into eight equal parts of 15 feet each, and at the several points of division let forces be applied, whose directions make with the horizon angles of 81, 78, 73, 66, 57, 46, 33, and 18 degrees respectively, estimated in order from the fulcrum. Now, suppose a load of 250 tons to be applied at G, the middle of the lever, and to be kept in equilibrio by the simultaneous action of all the forces; it is required to determine the strains upon the different portions of the hypothenuse A P, admitting the several oblique forces acting in their respective directions to produce the same or an equal effect.

Since the load which balances the accumulated effect of all the forces is 250 tons applied at a distance of 60 feet from the fulcrum, the conditions of equilibrium as referred to the property of the lever require that

$$15\ a\sin.81° + 30\ a\sin.78° + 45\ a\sin.73° + 60\ a\sin.66° + 75\ a\sin.57° + 90\ a\sin.46°$$
$$\underset{0}{\quad}\quad\underset{1}{\quad}\quad\underset{2}{\quad}\quad\underset{3}{\quad}\quad\underset{4}{\quad}\quad\underset{5}{\quad}$$
$$+ 105\ a\sin.33° + 120\ b\sin.18° = 250 \times 60 = 15000.$$
$$\underset{6}{\quad}\qquad\underset{7}{\quad}$$

Now, the eighth part of this, or 1875 tons, is the effect of each of the forces in producing the equilibrium; consequently the actual magnitude of each of the forces can easily be found as follows:—

Beginning with the oblique force which is nearest to the fulcrum, and proceeding in order to the most remote, the actual magnitudes of the forces to produce equal effects, accord-

ing to the obliquity of their directions, will be respectively as below :—

$$a_0 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_0} = \frac{1875}{15 \sin. 81°} = 126.5581 \text{ tons,}$$

$$a_1 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_1} = \frac{1875}{30 \sin. 78°} = 63.8963 \text{ tons,}$$

$$a_2 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_2} = \frac{1875}{45 \sin. 73°} = 43.5705 \text{ tons,}$$

$$a_3 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_3} = \frac{1875}{60 \sin. 66°} = 34.2074 \text{ tons,} \qquad \text{(V)}$$

$$a_4 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_4} = \frac{1875}{75 \sin. 57°} = 29.8091 \text{ tons,}$$

$$a_5 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_5} = \frac{1875}{90 \sin. 46°} = 28.9617 \text{ tons,}$$

$$a_6 = \frac{p\, d \sin.\phi_7}{8\, d \sin.\phi_6} = \frac{1875}{105 \sin. 33°} = 32.7871 \text{ tons.}$$

These are the respective magnitudes of the subsidiary forces branching off from the primitive direction A P; and the corresponding magnitudes of the forces acting on the first and last portions of the hypothenuse or chain are as follows, viz. :—

$$p = \frac{\delta w}{d \sin.\phi_7} = \frac{15000}{120 \sin. 18°} = 404.5086 \text{ tons,}$$

$$b = \frac{\delta w}{d \sin.\phi_7} = \frac{1875}{120 \sin. 18°} = 50.5636 \text{ tons.}$$

Having thus determined the magnitudes of all the subsidiary forces $a_0, a_1, a_2, a_3, a_4, a_5,$ and $a_6,$ together with the magnitudes of the forces which act on the first and last portions of the hypo-

thenuse or chain, it is easy to determine the magnitudes of the
forces which act on all the intermediate portions; for, since by the
conditions of construction, the effects of all the oblique
forces are the same, it is obvious that all the equations in
class (U) must be equal to the same constant quantity; that is,
the forces acting on the different portions of the hypothenuse
or chain, diminish in a regular progression from the highest to
the lowest point, and the constant difference may be found
from any one of the equations of the class just specified; or it
may be found by taking the difference between the forces
acting on the first and last portions, and dividing that difference
by the number of terms diminished by unity. Now the force
on the first portion is 404·5086, and that on the last is 50·5636
tons, and the number of terms or forces is 8; consequently we
have (404·5086 − 50·5636) ÷ 7 = 50·5636, which is the constant
difference sought.

Therefore, if from the magnitude of the force which indi-
vidually balances the weight, the constant difference be suc-
cessively subtracted, the remainders will indicate the diminishing
forces acting on the hypothenuse or chain; thus we have

$$b_0 = 404\cdot5086 - 50\cdot5636 = 353\cdot9450 \text{ tons.}$$

$$b_1 = 353\cdot9450 - 50\cdot5636 = 303\cdot3814 \quad ,,$$

$$b_2 = 303\cdot3814 - 50\cdot5636 = 252\cdot8178 \quad ,,$$

$$b_3 = 252\cdot8178 - 50\cdot5636 = 202\cdot2542 \quad ,,$$

$$b_4 = 202\cdot2542 - 50\cdot5636 = 151\cdot6906 \quad ,,$$

$$b_5 = 151\cdot6906 - 50\cdot5636 = 101\cdot1270 \quad ,,$$

$$b_6 = 101\cdot1270 - 50\cdot5636 = 50\cdot5634 \quad ,,$$

These forces, however, may also be deduced directly from
the formula (K), instead of finding them as above from each
other by continued subtraction; and since it may be necessary

on certain occasions to determine them in this way, it will be useful to show in what manner the reduction is to be effected.

By examining the several equations it will readily appear that d sin. ϕ in each of them is constant, and is equivalent to 120 sin. $18° = 37\cdot08206$; and the several portions of the entire effect which belong to the respective forces b_0, b_1, b_2, b_3, b_4, b_5, and b_6, are 13125, 11250, 9375, 7500, 5625, 3750, and 1875; so that we have

$$b_0 = \frac{13125}{37\cdot08206} = 353\cdot9450 \text{ tons.}$$

$$b_1 = \frac{11250}{37\cdot08206} = 303\cdot3814 \text{ ,,}$$

$$b_2 = \frac{9375}{37\cdot08206} = 252\cdot8178 \text{ ,,}$$

$$b_3 = \frac{7500}{37\cdot08206} = 202\cdot2542 \text{ ,,}$$

$$b_4 = \frac{5625}{37\cdot08206} = 151\cdot6906 \text{ ,,}$$

$$b_5 = \frac{3750}{37\cdot08206} = 101\cdot1270 \text{ ,,}$$

$$b_6 = \frac{1875}{37\cdot08206} = 50\cdot5635 \text{ ,,}$$

If we suppose all the values of ϕ but the last, or ϕ_7, to be equal to $90°$ or a right angle whose sine is unity; that is, if we suppose the subsidiary forces to act in directions perpendicular to the platform or lever, then it is obvious that the actual values of those subsidiary forces will be less than when they act in oblique directions; and for this reason, the several forces which act in the direction of the hypothenuse must be proportionally augmented in order to produce the same effect at the point of suspension; hence the advantage of causing the subsidiary forces to act obliquely; and the same principle applies to the oblique suspending rods in Mr. Dredge's method of constructing bridges.

CONTRACT

A SUSPENSION BRIDGE UPON MR. DREDGE'S PRINCIPLE AT BALLOCH FERRY, LOCH LOMOND.

It is contracted and agreed between the parties underwritten, viz., Sir James Colquhoun, of Luss, Bart., in the county of Dunbarton, North Britain, on the first part; and James Dredge, of Bath, in the county of Somerset, England, engineer, &c., as principal; and William Gibbons, of Bath aforesaid, maltster, &c., as guarantee, cautioner, and surety on the second part, in manner following: that is to say,—Whereas the said Sir James Colquhoun has resolved to erect a suspension bridge at Balloch Ferry, in the parish of Bonhill, Dunbartonshire, for the transit of foot passengers, horses, carriages, and cattle, conform to plans, elevation, and measurement, designed, drawn, and subscribed by the said James Dredge upon the principle invented by him, which plans consist of Nos. 1, 2, 3, and 4 different parts, which are all subscribed by the said parties as relative to these presents. Therefore, and in consideration of the price hereinafter mentioned, the said James Dredge has bound and obliged himself, and by these presents binds and obliges himself, and his heirs, executors, and representatives whomsoever, to construct and finish the said bridge, of sufficient strength, and in a good and workmanlike manner, conform to the plans, elevation, and measurement above mentioned; subject always to such alterations as shall appear to the said James Dredge to

be rendered necessary for the proper strength and durability of said erection.

And the said James Dredge obliges himself, at his own proper costs and charges, to provide the whole requisite working drawings and sections, models for masonry and iron-work, and also to furnish all iron rails and timber, and all other materials whatsoever (masonry materials excepted), which shall be necessary and fit to be used in or about the said bridge, and to superintend the erection of the same, and of the whole mason-work therewith connected.

And more particularly the said James Dredge binds and obliges himself, and his foresaids, to erect and finish the said bridge in manner following, viz.: of twenty feet width, and two hundred feet in length from the centre of one tower to the centre of the other, and of not less than seventeen feet and one half foot in height above the level of the River Leven at high flood, or at least as high from the surface of the river as the Bon-hill Bridge, with an opening of forty feet outside of each tower. The platform of the bridge to be three inches thick, of larch timber, and the other parts of good iron and good workmanship, with iron gates, and the whole of the iron-work to be once well painted; and in general, without prejudice to the particulars above specified, the said James Dredge binds and obliges himself, and his foresaids, to construct and finish the said bridge and openings conform to the foresaid plans, eleva-tion, and measurement, with such alterations as may be ren-dered necessary as aforesaid; and that the whole of the said bridge shall be executed in the best and strongest manner, and of the best materials.

And the said second parties hereby warrant that the said bridge, when completed, shall be capable of sustaining in transit double the weight of any load, whether of cattle, carriages, or otherwise, that it may ever be fairly exposed to. And further, the said James Dredge binds and obliges himself, and his foresaids, to proceed to the execution of the work above mentioned, and to carry on the same without any inter-mission, and completely finish the whole within two calendar months immediately after the completion of the towers of the said bridge. Providing hereby and declaring, that if the said

James Dredge shall fail so to complete the said bridge within said period of two months, he shall be bound to allow to the said Sir James Colquhoun, and the latter shall be entitled to retain from the price after specified, an abatement of five per cent. upon the amount which the said Sir James Colquhoun shall have advanced for masonry on the said bridge, and that during the time the said bridge shall remain unfinished after the expiring of the foresaid two months.

And it is hereby agreed that if the fencing off of a foot-path upon said bridge shall be dispensed with by the said Sir James Colquhoun, he shall in that case be allowed a deduction of twenty pounds from the stipulated price of said bridge herein-after mentioned; and in the event of his requiring only two gates on said bridge in place of three shown on said plan, he shall receive a further deduction on that account of five pounds sterling.   And further, if any other part of the said plans shall be dispensed with by the said Sir James Colquhoun, or not executed by the said James Dredge, the expense of such part or parts shall also be deducted from the price after mentioned. And if any of the conditions or particulars above specified shall be altered or executed contrary to the foresaid plans, these shall not be construed into an abandonment of the said plans, but the same shall be completed, and the present contract shall be effectual notwithstanding such alterations.

And further, the said second parties, viz., the said James Dredge, as principal, and the said William Gibbons, as cautioner, guarantee, and surety for him as aforesaid, bind and oblige themselves, conjunctly and severally, and their foresaids, to warrant, uphold, and maintain the said bridge and towers thereof in good and sufficient condition for the space of five years after completion thereof, excepting from this obligation any injury or damage which shall arise thereto by lightning, earthquake, civil commotion, or malicious damage, or not fairly within the compass of wear and tear by ordinary use of such bridge.   And if during the said period of five years any parts of said towers or bridge be discovered to be insufficient or requiring repair (not rendered necessary from the causes aforesaid), then the second parties shall be bound and

obliged, as they do hereby bind and oblige themselves and
their foresaids, to repair such parts and make them sufficient at
their own expense immediately on the insufficiency being dis-
covered. For which causes, and on the other part, the said Sir
James Colquhoun binds and obliges himself, his heirs and suc-
cessors, immediately on such bridge being completed and
proved to be sufficiently strong in all its parts as after men-
tioned, which proof shall be ascertained within one calendar
month after its completion, to make payment to the said
James Dredge, or his heirs, executors, or assigns, of the sum
of one thousand five hundred pounds sterling, as the agreed
price of the said bridge to be constructed by the said James
Dredge in terms hereof, including therein the whole of his
charges for engineering, travelling, and all other charges and
expenses competent to him for said work, excepting such
reasonable charge for superintending the erection of the said
towers, either by himself or by a qualified person appointed by
him, as may be considered fair between the parties, or as shall
be fixed by reference to a respectable tradesman resident in
Dunbartonshire, in case they do not agree. It being here
contracted and agreed that the said Sir James Colquhoun shall,
when required by the said James Dredge, furnish the timber
requisite for said bridge, and be entitled to retain out of the
said price of one thousand five hundred pounds the current
price of such timber so furnished, besides the expense of
dragging, conveyance, and whole workmanship thereof; and on
the completion of said bridge, the price of said timber and the
said expenses attending the same (which last shall be ascer-
tained and proved by the account and statement of the wood
forester on the estate of Luss) shall be deducted from the
said stipulated sum of one thousand five hundred pounds; and
the balance thereof, after such deduction, shall then be imme-
diately payable to the said James Dredge and his foresaids.
Providing always that the said bridge, including mason-work,
shall have been previously duly tested and proved, within the
aforesaid period of one calendar month, to be of the requisite
strength, and completed in all respects according to agreement,
and in such a manner as to afford to the public a safe com-

munication across the river Leven. But it is hereby expressly provided and declared that, if between the completion of the said bridge and the expiration of said five years, the bridge, including towers, shall not have fairly borne its work, and be thus proved unable or insufficient to answer the purposes for which the bridge is intended, the said James Dredge, as principal, and the said William Gibbons, as guarantee, cautioner, and surety foresaid, shall be bound and obliged, as they hereby bind and oblige themselves and their aforesaids, conjunctly and severally, to repair and make the bridge substantial in every respect, or to make repayment to the said Sir James Colquhoun, his heirs and assigns, not only of the foresaid sum of one thousand five hundred pounds sterling, but also of the further sum of two hundred pounds as and for a moiety of the outlay and expense disbursed by the said Sir James Colquhoun in the erection of the mason-work connected with the said bridge; and on such repayment, the said James Dredge and his foresaids shall be fully entitled to the whole of the iron and wood-work of the said bridge as his own property, and all the materials excepting the stone and mason-work thereof. And it is further hereby provided that, in the event of any difference arising with respect to the true meaning of the present contract or the execution of any part of the work hereby contracted for, the parties hereby submit the same to the final determination of William Steele, Esq., Advocate, Sheriff Substitute of Dunbartonshire, and failing him, to the Sheriff Substitute of the said shire for the time being, as sole arbiter, and oblige themselves and their foresaids to abide by and fulfil any decision which he shall pronounce on the matters hereby submitted to him. And both parties bind and oblige themselves and their foresaids to implement and perform their respective parts of the premises to each other under the penalty of five hundred pounds sterling, to be paid by the party failing to the party observing the contract or willing to do so, besides performance. And both parties consent to the registration hereof in the Books of Council and Session Sheriff Court of Dunbartonshire or other Judges' Books competent for preservation; and that letters of horning, or six days' charge, and all other

execution needful, may hereon pass on a decree to be inter-
poned hereto, and for that purpose constitute

Procurators; in witness whereof these presents, written upon
    stamped paper by James Mackibbin, Clerk to Robert
    Grieve, Writer, Dunbarton, are subscribed,

                                        (L. S.)

                                        (L. S.)

                                        (L. S.)

SPECIFICATION OF THE QUANTITIES OF MATERIAL

SUSPENSION BRIDGE AT BALLOCH FERRY,

DUNBARTONSHIRE.

THE PLATE is an isometrical projection of a suspension bridge now in course of erection across the Leven at Balloch Ferry in Dunbartonshire, for Sir James Colquhoun, of Luss, Bart., after designs and under the superintendence of Mr. Dredge, of Bath.

The whole extent of the suspended road-way is 292 feet; but as a space is left on each side as an easy access to and from the towing-paths, the distance from the centre of one pier to the centre of the other is reduced to 200 feet, which must be considered as the span of the bridge.

Each pier for supporting the chains consists of two octagonal towers upon which the chains rest, and which are connected together by springing a light arch across the road-way. These towers taper from 15 feet 2 inches by 9 feet 2 inches at the base, to 9 feet by 3 feet at the top, the longest dimension being in the direction of the bridge. The entire height of the towers is as under, viz.

		feet.
From bed of river to water-mark	. . .	3
,, water-mark to upper surface of road-way	.	16
,, road-way to tops of towers	. . .	21
		40 feet.

D

The distance from the centre of one octagonal tower to the centre of the other across the road-way is 20 feet, equal to the width of the bridge. The towers and the key-stone of the arch are built of a reddish freestone from Bonhill; the stringing courses at the road-way, springing of the arch, and the offsets at the top of the tower, of a white stone in the neighbourhood.

Upon the tops of the towers are large cast-iron plates, on which the chains rest.

The principal chains for supporting the structure are formed of $\frac{7}{8}$ round bars, laid side by side to the number of 13 upon the tops of the towers, and successively dropping one at each joint until it arrives at the centre, where that part of the chain is reduced to a single bar. The links upon the towers are 6 feet long, but after springing from thence they are increased to 9 feet.

1.   The weight of each link, 6 feet long, is 14·5 lbs.

The weight of iron on the towers is therefore

$$14·5\ (13 \times 4)\quad . \quad . \quad . \quad . \quad =\quad 75·4$$

The weight of each link, 9 feet long, is 20 lbs.

The weight of iron is therefore $20\{8(12 + 2 \times 5·5) + 4\} = 12400$

$(24 \times 4) = 96$ connecting bolts increasing in arithmetical progression from 3 to 12 lbs. each,

$$\tfrac{96}{2}(3 + 12)\quad . \quad . \quad . \quad . \quad . \quad =\quad 720$$

$$\text{Weight of iron in chains}\ .\quad =\ 13874\ \text{lbs.}$$

The length of the oblique suspending rods, if radius remained constant, would be as the sec. of the angle which they respectively make with the horizon; but in consequence of the inclination of the chains towards the joints of connexion with the suspending rods, their length diminishes continually towards the centre of the bridge; and as the ascertaining the exact length of each rod separately would involve much complicated calculation, we will avoid it, and assume (which will be very near the truth) the average length of the bars to be 11 feet 9 inches, (excepting those immediately proceeding from

the joints on the towers:) the two bars from each joint of the chains being ¾ of an inch in diameter, we have, for the weight of the whole of the ¾ bars,

2.   *1·47 (88 × 2 × 11·75)   .   .   .   .   = 3039·96

    16 oblique rods from the towers ⅞ diameter, averaging 26·6 feet in length :

        *2 (16 × 26·6)   .   .   .   .   .   = 851·2

    136 pieces ⅞ rod, each 2 feet long, welded to the end of the oblique rods :

        2 (136 × 2)   .   .   .   .   .   = 544·

    136 nuts, each ·25 ℔.

        ·25 × 136   .   .   .   .   .   = 34·

    56 pieces 1 inch in diameter, 2 feet long, in retaining rods :

        2·61 (56 × 2)   .   .   .   .   .   = 292·32

    56 nuts, each ·333 ℔.

        ·333 × 56   .   .   .   .   .   = 18·64

    152 nuts and pins, each ·5 ℔.

        ·5 × 152   .   .   .   .   .   = 76·

        Total weight of oblique suspending rods = 4856·12 ℔s.

Proceeding onwards, we next arrive at the horizontal beams, or those running from end to end of the bridge; and there are here 2 of 190 feet long, and 4 of 45 feet long each, all 5 inches × ½ inch, so that

3.   8·4 {(190 × 2) + (45 × 4)}   .   .   .   = 4704

    64 connecting plates, each 1 foot long :

        8·4 × 64   .   .   .   .   .   = 537·6

    6 ⅞ pins to each plate, each ·5 ℔.

        ·5 × 64 × 6   .   .   .   .   .   = 192

        Total weight of horizontal beams 5433·6 ℔s.

We have now to examine the weight of the transverse beams, or those which run at right angles to and immediately support

---

* Where 1·47 and 2 are respectively the weight in ℔s. of a ¾ and a ⅞ rod 1 foot long.

the platform; they are each 20 feet long, 5 inches deep × $\frac{1}{8}$ an inch in thickness, and have at every 6 inches along their length, near the upper edge, holes of $\frac{11}{16}$ths of an inch drilled to admit of $\frac{5}{8}$ rods passing longitudinally through them from end to end of the bridge; there are 117 such beams in all:

4.
$$8{\cdot}4 \ (20 \times 117) \quad . \quad . \quad . \quad . \quad = 19656$$

Every third beam is trussed with suspension trusses, consisting of 5 rods, viz., $1 = \frac{7}{8}$ and $4 = \frac{5}{8}$, each 6·66 feet long:

$$
\begin{array}{ll}
2 \ (39 \times 6{\cdot}66) \quad . \quad . \quad . & = 519{\cdot}48 \\
1{\cdot}02 \ (39 \times 4 \times 6{\cdot}66) \quad . & = 1059{\cdot}739 \\
\hline
& 1579{\cdot}219 \\
\end{array}
$$

$$\frac{1579{\cdot}219 \times 8}{100} \quad . \quad . \quad . \quad = 126{\cdot}337$$

$$\qquad\qquad\qquad\qquad \underline{1705{\cdot}556} = 1705{\cdot}55$$

$$\qquad\qquad\qquad\qquad\qquad\qquad\qquad 21361{\cdot}55$$

From which deduct for the quantity of iron not used in the holes,

$$1{\cdot}23 \left(\frac{40 \times 117}{24} \right) \quad . \quad . \quad . \quad = \quad 239{\cdot}85$$

$$\qquad\qquad\qquad\qquad\qquad\qquad\qquad 21121{\cdot}70$$

The $\frac{5}{8}$ rods to which we before alluded run 6 inches apart through the transverse beams from end to end, and are placed there for the purpose of combining the whole mass together, and causing a more equable pressure upon the beams which support the road-way; there are, therefore, 40 rods of 195 feet long each, and 80 of 45 feet, so that the whole weight will be

5.
$$1{\cdot}02 \ \{(195 \times 40) + (80 \times 45)\} = 11628.$$

There are also 28 bars, each 10 feet long, $1\frac{1}{8}$ in diameter, to be used as holdfasts in the ground for retaining the chains.

6.
$$3{\cdot}31 \ (28 \times 10) \quad . \quad . \quad . \quad . \quad = 926{\cdot}8$$

28 nuts, ·75 ℔.

$$\cdot75 \times 28 \quad . \quad . \quad . \quad . \quad . \quad = \quad 21$$

$$\qquad\qquad\qquad\qquad\qquad\qquad\qquad \underline{947{\cdot}8} \text{ ℔s.}$$

And by adding the results together we shall have

1	.	.	=	13874
2	.	.	=	4856·12
3	.	.	=	5433·6
4	.	.	=	21121·7
5	.	.	=	11628
6	.	.	=	947·8

<div style="text-align:center">

                       tons. cwt. qr. ℔s.

Total 57861·22=25 16 2 13·22

</div>

the whole of the wrought-iron actively employed in the structure; to which, if we add that used in railing,

$2 (400 \times 2 \times 4)$ . . . . . = 6400
and about 400 ℔s. more as staples, &c. . .   400
                                      6800 ℔s.

	tons.	cwt.	qr.	℔s.
	3	0	2	24
	25	16	2	13·22
	28	17	1	9·22

the total quantity of wrought-iron used in the bridge.

We have next to examine the cast-iron used; and beginning with the plates on which the chains rest,

1.   Four plates, each 560 ℔s.   =2240
    136 circular plates for fastening the
    oblique rods to the horizontal beam,
    each 3·5 ℔s.
2. 136×3.5 . . . = 476
    22 ℔s. cast blocks to each truss, and
    there being 39 trusses:
    22×39 . . . . = 858
    2 cast boxes for each beam for attach-
    ing it to the horizontal longitudinal
    beams, each 11 ℔s.
    $11 \times 2 \times 117$ . . . =2574
    28 castings in retaining chains, each 5 ℔s.
    5×28 . . . . = 140
                             tons. cwt. qr. ℔s.
                     6288 ℔s.=2 16 0 16

as the total quantity of cast-iron actively employed in the bridge; to which add the quantity used in the railing,

$$28 \times 4 \times 35 = 3920 = \begin{array}{c} \text{tons} \\ 1 \\ 2 \\ \hline 4 \end{array} \begin{array}{c} \text{cwt.} \\ 15 \\ 16 \\ \hline 11 \end{array} \begin{array}{c} \text{qr.} \\ 0 \\ 0 \\ \hline 0 \end{array} \begin{array}{c} \text{lbs.} \\ 0 \\ 16 \\ \hline 16 \end{array}$$

The timber used in its construction is larch, grown on the estate of Sir James Colquhoun at Luss, and the quantity used is,

$$292 \times 20 \times \cdot 25 \quad . \quad . \quad . \quad . \quad = 1460$$

2 beams of wood passing from end to end, 6×3 inches :

$$2 \, (292 \times \cdot 5 \times \cdot 25) \quad . \quad . \quad . \quad . \quad = \quad 73$$

$$\overline{1533 \text{ feet.}}$$

The whole of the material used is,

			tons	cwt.	qr.	lbs.
1st, Wrought-iron	.	.	28	17	1	9·22
2nd, Cast-iron	.	.	4	11	0	16
3rd, Timber	.	.	1533	cubic feet.		

The principle upon which this bridge is built is entirely new; and it has been doubted by many whether the arrangement of the bars in the chain and the adoption of the oblique suspending rods is a judicious application of iron in the construction of such bridges. The small quantity of material used in the one specified above, (which is intended as a permanent structure for general traffic,) is however, a sufficient proof; and we shall endeavour to show by mathematical reasoning, that it is more than equal to sustain any load which it is possible to place upon the surface of its road-way.

In calculating the force of a bridge of this description, the formulæ involved are necessarily very different from those used in estimating the common catenary; for here one half of the bridge balances the other, the structure being held in equilibrio entirely by the acting chains, and the centre part of the chain where it is reduced to a single link, may be severed or entirely removed without affecting the stability of the structure. It is therefore evident that such a bridge may be

referred to the projection of two brackets, and estimated accordingly.

Fig. 1.

Conceive the weight W to be supported by a cord A C at the extremity of a horizontal projection B C, and maintained there by a tension in the line A C, and compression in the line B C; then A B C being a right angled triangle by construction,

$$\text{sin. A C B} : \text{rad.} :: \text{A B} : \text{A C},$$

or A C $=\dfrac{\text{rad.}}{\text{sin. A C B}}$. A B $=$ A B. cosec. A C B

by the principles of projection.

A B : (A C) $=$ A B. cosec. A C B :: W : W $\dfrac{\text{cosec. A C B . A B}}{\text{A B}} =$ W cosec. A C B.

Let $w=$ W, the weight resting on the point C.

$\theta=<$ A C B, contained by the horizontal line and the line A C.

$x=$ the tension in the line A C (caused by the weight W) in the direction C A.

$y=$ pressure or thrust in the direction C B.

Then, by substituting these quantities for the former proportion, we have

$$\text{sin. } \theta : \text{rad.} :: w : x,$$

and by equating the products and reducing the equation, we get

$$x=\frac{\text{rad.}}{\text{sin. } \theta} w = w \text{ cosec. } \theta \quad . \quad . \quad . \quad . \quad (1)$$

And for the pressure or thrust in the direction C B, it is

$$\text{sin. } \theta : \text{cos. } \theta :: w : y;$$

consequently by reduction, we have

$$y = \frac{\cos.\ \theta}{\sin.\ \theta}\, w = w\ \cot.\ \theta \quad . \quad . \quad . \quad . \quad (2)$$

Which equation holds true for every value of the angle θ; but there is the same strain in every part of the line A C, and if such were to remain, there would be no occasion to increase the size of the chain towards the point A. But let us further suppose another weight W' to be supported by a line from some intermediate point between B and C, and let that line be attached to some point A' in the cord A C, as in fig. 2.

Fig. 2.

Allowing A C B to remain as before, and supposing the same quantities to retain the same values as in the former figure, and putting in this w', θ', x', y' respectively for the weight W', the $\angle$ A'C'B, the tension in the line A'C', and the pressure in the direction C'B, we have, for the value of x' by equation (1),

$$x' = w'\ \text{cosec.}\ \theta' \quad . \quad . \quad . \quad . \quad (3)$$

The point A' in the line A C is acted upon by two forces represented by the symbols x, x', the resultant of which forces in the direction towards A will be,

$$R = \sqrt{x^2 + x'^2 + 2\ x\ x'\ \cos.\ (180° + \theta - \theta')} \quad . \quad . \quad (4)$$

The former values of x and x' being substituted, we get

$$R = \sqrt{w^2 \text{cosec.}^2\theta + w'^2 \text{cosec.}^2\theta' + 2w\ \text{cosec.}\ \theta\ .\ w'\ \text{cosec.}\ \theta'\ \cos.\ (180° + \theta - \theta')}$$

And the difference will be represented by

$$D = \sqrt{w^2 \text{cosec.}^2\theta + w'^2 \text{cosec.}^2\theta' + 2w\ \text{cosec.}\ \theta\ .\ w'\ \cos.\ \theta'\ \cos.\ (180° + \theta - \theta')}$$
$$- w\ \text{cosec.}\ \theta,$$

and in which proportion, the chains should increase in sectional
area towards the base.   Proceeding in like manner for another
section, the resultant of the forces would be

$$R'' = \sqrt{(z''^2 + R^2 + 2\,R\,z''\cos.\,(180^\circ + \delta - \theta'')^*}\qquad.\quad(5)$$

From which it appears, that each progressive section of the
chain towards the point of suspension, has an increase of strain,
equal to the resultant of the two forces acting at the further
extremity of that section towards the extremity of the bracket;
and from this it is evident, that the chain should taper in the
same proportion; but it is equally clear, that the use of the
oblique suspending rods is peremptorily insisted upon, other-
wise the reduction of material towards the extremity of the
bracket beyond a certain extent would be a proportionate
reduction of power.

The following diagrams will graphically illustrate this :

Fig. 3.

Draw $a'\,c'$ (fig. 3) parallel to $A'\,C'$, produce $A\,A'$ onwards to
the point c', and the triangle of forces $A'\,a'\,c'$ being complete,
it only remains that the lines supporting the brackets should
be increased in power proportionally to the length of the sides
of the triangle to which they are respectively parallel.

---

* Where z'' represents the value of the tension sustained in the angle
or inclination θ'', R the resultant of the first two forces, and δ an angle
of which R is equivalent to the cosec..

Fig. 4.*

Again (fig. 4), draw a' c' parallel to A′ C′, and continue A A′ to c'; then will the triangle of forces be complete, as in the former curve; but it is evident by the construction of the bracket, that the pressure of the horizontal force is not sustained by the road-way. Draw A′ b parallel to B C, then will A′ b be the measure of that horizontal force, or equal to the weight resting on A′ drawn into the cotangent of the angle A A′ b, which must be counteracted by a sufficient power in the direction A′ C′; and the weight of the iron, which would be equivalent to that power, would be oppressing the chain in the direction A′ A, as the cosecant of the angle A A′ b.

It is well known that the parameter of the catenary of a suspension bridge, is equivalent to half the weight of the structure drawn into the cotangent of the angle which a tangent to the curve at the point of suspension forms with the horizon, and the oblique strain is equal to half the weight drawn into the cosecant of the same angle.

Therefore, from what has been said, it is clear that a parallel section of iron, equivalent to the parameter of the catenary, may be taken away from one end of the curve to the other, and that not only the weight would be saved, but also another

---

* I would here presume that whilst speaking of a bracket supported by a catenary curve with vertical suspending rods, a tensile force must be acting from the point C′ equivalent to the parameter of that curve.

quantity of iron which was necessary to support it. These, then, are the advantages which arise from the use of the oblique suspending rod.

Example.

Suppose A B C (fig. 1) to be a bracket projecting from a wall with a weight of 364 ℔s. attached at the point C, the angle A C B being 39°; required the tensile power upon the cord A C, and also the horizontal pressure in the direction B C?

By equation (1) we have,

$$x = w \text{ cosec. } \theta,$$

therefore,

$$364 \times 1.589015 \quad \ldots \quad \ldots \quad = 578.401 \text{ ℔s.,}$$

and by logarithms,

$$\begin{aligned}
\text{log. } 364 \quad . \quad . \quad &= \ 2.561101 \\
\text{log. cosec. } 39° \quad &= 10.201128 \\
\hline
\text{nat. num. } \ \overline{2.762229} \quad &= 578.401 \text{ ℔s.}
\end{aligned}$$

As shown by equation (2),

$$y = w \text{ cot. } \theta,$$

hence

$$364 \times 1.234897 \quad . \quad : \quad . \quad . \quad = 449.502 \text{ ℔s.,}$$

by logarithms,

$$\begin{aligned}
\text{log. } 364 \quad . \quad . \quad &= \ 2.561101 \\
\text{log. cot. } 39° \quad . \quad &= 10.091631 \\
\hline
\text{nat. num. } \ \overline{2.652732} \quad &= 449.502 \text{ ℔s.}
\end{aligned}$$

Again, let every thing remain as before ; but suppose another weight equal to 364 ℔s. were added to the point C', as in fig. 2, and supported at an angle of 50°; required the increase of strength from A' towards A, and also the horizontal pressure towards B?

By equation (3),

$$x' = w' \text{ cosec. } \theta';$$

consequently,

$$364 \times 1\cdot305408 \quad . \quad . \quad . \quad . \quad = 475\cdot16 \text{ lbs.}$$
$$\text{log. } 364 \quad . \quad . \quad = \ 2\cdot561101$$
$$\text{log. cosec. } 50^\circ \ . \quad = 10\cdot115746$$

$$\text{nat. num. } \ 2\cdot676847 \quad = 475\cdot16 \text{ lbs.}$$

Therefore 475·16 lbs. is the tension in the direction C′ A′; but to ascertain the value of the tension from A′ to A, by referring to equation (4) we find,

$$R = \sqrt{x^2 + x'^2 + 2\,x\,x' \cos. \ (180^\circ + \theta - \theta')},$$

and by substituting the numerical values for the several quantities, we get

$$R = \sqrt{578\cdot401^2 + 475\cdot16^2 + 2 \times 578\cdot401 \times 475\cdot16 \times \cdot981627}$$

that is
$$578\cdot401^2 = 334547\cdot7168$$
$$475\cdot16^2 = 225777\cdot0256$$
$$2 \times 578\cdot401 \times 475\cdot16 \times \cdot981627 = 539567\cdot0241$$

and
$$\sqrt{1099891\cdot7665} = 1048\cdot75 \text{ lbs.}$$

The required strength in that part of the cord A A′, and the difference between the part A A′ and A′ C is,

$$\begin{array}{r} 1048\cdot75 \\ 578\cdot401 \\ \hline 470\cdot349 \end{array}$$

And the sectional area of the one part should be to the sectional area of the other as

$$1 : 1\cdot8131.$$

For the magnitude of the horizontal force; that which is occasioned by the weight at the further extremity of the bracket has been shown to be = 449·502 lbs.; but the adding of another weight at C′ will cause an increase towards B, so that the aggregate of force from C′ to B is represented by

$$449\cdot502 + (364 \times \cdot839100) = 754\cdot934 \text{ lbs.}$$

And the difference of pressure between the part C′ B and C C′ is

$$754\cdot934 - 449\cdot502 = 305\cdot432.$$

Example 2.

Suppose a figure similar in every respect to fig. 4, and let a weight of 364 ℔s. be attached to the horizontal line from the point C, and let A′ C′ form the same angle with the horizon that A′ C′ did in the former curve, viz., 39.° Then the tension in the direction A′ C′ will be

$$364 \times 1\cdot589015 = 578\cdot400 \text{ ℔s.}$$

and the horizontal force, as before represented, is equal to

$$364 \times 1\cdot234927 = 449\cdot502 \text{ ℔s.,}$$

which must in this case be resisted through the cord in the direction from C; or, in short, as the parameter of the catenary; and therefore, the absolute tension in the direction C′ A is in consequence, equal to 1·589015 (364 + the weight of material requisite to sustain a pull of 449·502 ℔s.), and which, in large spans, increases to such an enormous extent as to facilitate the destruction of the structure.

The throwing the thrust on the towers or abutments into the horizontal line is of advantage to the road-way, as rendering it more steady and not so liable to that oscillation to which suspension bridges are commonly exposed; and in practice, the sectional area of the beam to sustain the transverse action of the platform, would be more than sufficient under any circumstance, to overcome the horizontal action to which the structure may be exposed: for that reason, therefore, it would be useless to increase the beam towards B.

The preceding examples which refer to the bracket only are strictly arbitrary, and have been proposed for the purpose of showing in what manner the formulæ arising from the investigation are to be applied; but as a further illustration of the advantages to be derived from the adoption of the system just

discussed, we shall revert to the bridge across the River Leven for which the quantity of materials has already been ascertained. The whole quantity of material employed is apparently very small, and if compared with that which would be required on the old principle, might tend to create a doubt as regards the strength and stability of the structure. In order, therefore, to remove any suspicions that may be entertained on that point, we shall here endeavour to show that the material used, though small in quantity, is amply sufficient to sustain a much greater load, than under any possible circumstances can ever be brought upon the platform.

There are four points of suspension, and at each point there are twelve bars in the chains besides two oblique suspending rods, all of $\frac{3}{4}$ths of an inch in diameter; this gives a section of 8·4185 square inches at each tower or point of support, or, in all, 33·674 square inches of section. Now, since the absolute tensile power of a $\frac{3}{4}$th bar of malleable iron of a medium quality is 35000 ℔s. very nearly, the absolute strength of the iron at the joints adjacent to the towers is 875 tons, for

$$(12=2) \times 4 \times 35000 = 1960000 \text{ ℔s.} = 875 \text{ tons.}$$

In the next place, we have to ascertain the greatest tension, that under any circumstances can come upon the chains at the points of support, and for this purpose we shall suppose the weight of the platform, chains, diagonal rods, &c., between the towers to be 67200 ℔s., and taking the greatest extraneous load to which a bridge ought ever to be exposed at 120 ℔s. per square foot, we get

$$190 \times 20 \times 120 = 456000 \text{ ℔s.}$$

the length of the platform being 190 feet; therefore we have

$$67200 + 456000 = 523200 \text{ ℔s.}$$

for the total weight to be supported.

Now, the angle which the first series of bars would make with the platform, if continued downwards till they intersect it, is 24 degrees, and the natural cosecant of 24 degrees, is 2·458591; consequently, by equation 1 (page 55), we obtain for the effect of obliquity,

$$523200 \times 2\cdot458591 = 1286334\cdot8112 \text{ ℔s., or } 574\cdot2566 \text{ tons.}$$

Let this be subtracted from the absolute power of the iron at the points of suspension, and we have

$$875 - 574\cdot2566 = 300\cdot7434 \text{ tons,}$$

which is the surplus strength in the chains after the platform is fully loaded; and every part of the structure, if properly tested, would be found equally sufficient for the intended purpose.

The preceding method of obtaining the surplus strength of the bridge is simple and easily applied, but it may be done otherwise as follows.

We have found that the entire weight to be supported in an extreme case is 523200 ℔s., and we have moreover seen, that the ultimate strength of a single bar of the iron used, is 35000 ℔s.; consequently, the number of bars required at the towers will be

$$523200 \div 35000 = 14\cdot948 \text{ bars.}$$

This, however, is on the supposition that the iron is strained vertically in the direction of its fibres, but this in the case of a bridge is contrary to fact, the bars being all placed in an oblique position with respect to the horizon, while the weight acts in a direction perpendicular to it; the power of the iron must therefore be reduced in the ratio of radius to the sine of the angle of obliquity; or, which is the same thing, the weight must be increased in the ratio of the cosecant to radius. Now the angle of obliquity is 24 degrees, and its cosecant 2·458591; hence we get

$$523200 \times 2\cdot458591 \div 35000 = 36\cdot75 \text{ bars;}$$

but there are 56 bars at the towers in the Balloch Bridge; consequently we have

$$56 - 36.75 = 19.25 \text{ bars},$$

or 4·8125 bars at each tower for the surplus strength, even in the case of an extreme load.

———————

WORKS RECENTLY PUBLISHED

Architecture.

1.

In 4to., very neat in half-morocco, with about 130 Illustrations on wood and copper, Price 15s.; some copies with illuminated title-page, &c., and with India proofs, Price £1. 4s.

THE TRUE PRINCIPLES OF POINTED OR CHRISTIAN ARCHITECTURE:

SET FORTH IN TWO LECTURES DELIVERED AT ST. MARIE'S, OSCOTT,

BY A. WELBY PUGIN, ARCHITECT, AND PROFESSOR OF ANTIQUITIES IN THAT COLLEGE.

The following important facts are fully explained in this Work:

1. That all the Ornaments of pure Pointed Edifices were merely introduced as decorations to the essential constructions of those Buildings.

2. That the construction of Pointed Architecture was varied to accord with *the properties of the various materials employed*, shown by ancient examples of Stone, Timber, and Metal construction.

3. That no features were introduced in the ancient Pointed Edifices, which were not *essential either for convenience or propriety*.

4. That Pointed Architecture is most consistent, as it *decorates the useful portions of Buildings, instead of concealing or disguising them.*

5. That true principles of architectural proportion are only found in Pointed Edifices.

6. That the defects of modern Architecture are principally owing to *the departure from ancient consistent principles.*

It will be readily perceived from these heads, that the present Work furnishes the means for testing architectural excellence, by setting forth the consistent principles of ancient design. Hitherto architectural criticism has been little more than mere capricious opinion, and few persons could give a satisfactory reason for their approval or dislike of a Building. The laws of Architectural Composition are based on equally sound principles as those of Harmony or Grammar, and *that they can be violated with greater impunity is simply owing to their being less understood.* It is humbly hoped that this Work, which is the result of long experience and patient research, will supply in a great measure the want of *sound information* that exists on this important subject; and by explaining the *consistent principles of Pointed Architecture*, which are *inseparable from pure taste*, furnish a standard by which the excellence of the ancient Buildings may be duly appreciated, and the extravagances and inconsistencies of modern styles readily discerned.

Among the Illustrations will be found several interesting examples of ancient Roofs, Ceilings, Fittings of Rooms, Railings, Hinges, and Ornamental Iron-work, Silver Shrines and Reliquaries, Jambs, Basements, Water-tables, and details of Stone-work, Jointing of Masonry, and Perspective Views of Ecclesiastical, Collegiate, and Domestic Buildings; all drawn from Original Sketches by the Author.

2.

WINDSOR CASTLE:

Illustrated by the late Sir JEFFRY WYATVILLE, R.A., F.R.S., &c.

DEDICATED, BY EXPRESS PERMISSION,

To Her Most Gracious Majesty the Queen.

In obedience to a "Command" from His late Majesty King William the Fourth, in 1834, Sir Jeffry Wyatville began this Work, with the determination of rendering it fully worthy the subject.

On her accession, Her Majesty the Queen condescended, by an autograph, to express her " entire approval " of Sir Jeffry's proceeding with the Work ; which was on the eve of completion at the time of his death in February, 1840, and is now published agreeably to the promise of his Son-in-law and his Executors.

The following shows the nature and extent of the Work, and the terms of publication.

It consists of Forty Plates, all large but three, and several of great magnitude, forming two volumes, (or in one, at the option of the purchaser,) Grand Eagle. The first contains Elevations and Perspective Views of the several Fronts of the Castle, some of them of considerable size, with the requisite Plans.

The second contains Elevations of the various Parts of the Castle, on a larger scale.

The Plates are accompanied by a full *Description* of them.

Also an *Historical Essay*, so far as relates to the structure of the Castle, from its foundation to the present time, by AMBROSE POYNTER, Esq.; illustrated by other Plates and by Wood-Cuts, chiefly showing the former state of the Castle.

The Work was published in three Parts ; the first issued in May, 1840, the second in October, and the concluding Part in June, 1841.

Proofs on India Paper, £4. 14s. 6d. each Part.   Prints, £2. 12s. 6d. each Part.

For a work of this magnitude, produced at a great cost, the terms of publication are extremely moderate ; but Sir Jeffry was desirous only, first, of obeying the commands of his Sovereign, and then of fulfilling his own inclinations, by producing for the gratification of the British Public a magnificent Illustration of this truly Royal Palace, to the new construction and improvement of which so many years of his active life had been devoted.

It is edited (at the request of Sir J. Wyatville's Son-in-law and of his Executors) by HENRY ASHTON, Esq., Architect, who, on Sir Jeffry's resignation, was appointed to succeed him in superintending the works in progress at the Castle.

LIST OF THE PLATES.

Sold also, 2 vols. in 1, very neat in cloth boards and lettered, Price £8. 8s., or elegant in half-morocco, gilt, Price £8. 18s. 6d.

3.

In large 4to, very neat half-morocco, gilt tops, Price 18s.

STUDIES OF MODERN ENGLISH ARCHITECTURE.
THE TRAVELLERS' CLUB-HOUSE.

By CHARLES BARRY, Architect.

Illustrated by Engravings of Plans, Sections, Elevations, and Details, by J. H. Le Keux.

With an Essay, including a Description of the Building, by Mr. W. H. LEEDS.

*** This volume, complete in itself, is proposed as the first of a series under the general title of "The Modern School of English Architecture."

'The Plates, engraved by J. H. Le Keux, from the Drawings of Mr. Hewitt, are examples of perfection in this species of art. We do not believe that any artists that ever lived could carry it further. They will afford exemplars both to architectural draughtsmen and engravers, as well as to architects themselves; and will go down to posterity as the remains of Grecian architecture have descended to us.

'The author before us seems to be exactly the sort of commentator to grapple with doubts and conflicting opinions, since he is not hampered with school prejudices and conventionalities; but combines fresh thoughts and sound reflections on his subject with good taste and elegant diction.'—*Probe*, No. 13.

LIST OF PLATES.

<table>
<tr><td>1. Ground plan of the building.</td></tr>
<tr><td>2. Principal plan.</td></tr>
<tr><td>3. Elevation of the front.</td></tr>
<tr><td>4. Elevation of the back front.</td></tr>
<tr><td>5. Longitudinal section through A to B.</td></tr>
<tr><td>6. Longitudinal section through C to D.</td></tr>
<tr><td>7. Details of the principal front: Windows, ground floor, section of cornice, section of window head, section of under part of window, section of ornament in string course, elevation of console, balustrade to area front.</td></tr>
<tr><td>8. Details of the principal front: Section of principal</td></tr>
</table>

cornice, elevation of cornice, pilaster cap and entablature to window, elevation of one-pair window, elevation of cornice, &c.

9. Details of rear front: Elevation of one-pair window, section of window head, elevation of block, elevation of cornice, section of principal cornice, section of window cornice, &c.

10. Details of drawing: Plan of ceiling, bend, section of cove of ceiling, enriched panel of ceiling, section of cornice, chimney-piece, &c.

4.

One large 4to. The Plates engraved in the finest style of Art. Cloth boards, lettered, Price £1. 10s.

THE MONUMENTAL REMAINS OF NOBLE AND EMINENT PERSONS,

Comprising the Sepulchral Antiquities of Great Britain, engraved from Drawings by
EDWARD BLORE, Architect, F.S.A.

With Historical and Biographical Illustrations.

CONTENTS.

5.

On a scale of 25 feet to an inch, plain paper, £1. 1s.; Indian paper, £1. 11s. 6d.

LONDON BRIDGE;

A large steel Plate, 3 feet 6 inches by 2 feet, containing

Plan and Elevation of this great National Work, with the very interesting reference of dimensions, materials, time, and cost.

Engraved in the best style, and elaborately finished by J. W. Lowry, under the direction of B. ALBANO, Esq., M.Inst.C.E., and from his Original Drawing, presented to the

INSTITUTION OF CIVIL ENGINEERS, 1839.

Made from Original Drawings and Admeasurements on the Works.

Constructed by Sir JOHN RENNIE, C.E., F.R.S.

This splendid Engraving, upon which much time has been expended to obtain the greatest accuracy, is submitted to the Civil Engineer and Architect, as an example of a work so intimately connected with their professional engagement, and to the amateur as a monument of British Art.

Sold in Frames, glazed with the best glass for an Office, and which may also be appropriated as an attractive object for the Library or Parlour of a Nobleman or Gentleman's Mansion.

6.

In Imperial 4to., to be completed in 2 Parts,

A SERIES OF ORIGINAL DESIGNS FOR CHURCHES AND CHAPELS

In the Anglo-Norman, Early English, Decorative English, and Perpendicular English, Styles of Ecclesiastical Architecture; including also, Designs for Rectory Houses and Schools, in the Tudor and Domestic Styles.

By FREDERICK J. FRANCIS, Architect, Author of "A Brief Survey of Physical and Fossil Geology," and "The Fine Arts of Greece during the Age of Pericles."

The First Part, Price £1. 10s., is ready, and contains about 50 Illustrations, comprising plans, geometrical elevations, and perspective views : to which are appended, full practical descriptions respecting the materials to be employed, and the probable expense of the erection of each design. Gentlemen willing to become Subscribers to the complete work are requested to send their names. The Work which the Author now offers to the Public is the result of several years' diligent study of the principles and practice of Pointed Ecclesiastical Architecture. The attainment of professional advancement has been his chief motive in engaging upon it : added to which he conceives, that at the present time, when the increasing demands for Church Extension render Church Building an important branch of an Architect's duties, such a work would be likely to prove useful to the professional man. During its progress he has been encouraged by the flattering testimonials of approbation he has received from those whose opinions, being founded on deep study and extensive experience of the principles of Art, he values most highly ; and he hopes, that when completed, it will be found to merit the notice and patronage, not only of the profession itself, but also of those upon whose taste and liberality the true exaltation of this noble branch of Art depends.

7.

VITRUVIUS BRITANNICUS.

Containing 12 fine Plates, with Text, in a neat portfolio, Price in Columbier folio £3. 3s.; some copies of India proofs, Price £5. 5s.

HISTORY, ANTIQUITIES, AND ARCHITECTURE OF CASTLE ASHBY.

The Seat of the Most Noble the MARQUIS OF NORTHAMPTON, President of the Royal Society. Illustrated by Plans, Elevations, and Internal Views of the Apartments from actual Measurement.

By P. F. ROBINSON, Architect, V.P.I.B.A., F.S.A., &c.

8.

ST. STEPHEN'S CHAPEL, WESTMINSTER.

In 1 large Atlas folio volume, with several very fine Plates, executed from the elaborate Drawings of Mr. FREDERICK MACKENZIE, Price £4. 4s., entitled

THE ARCHITECTURAL ANTIQUITIES AND RESTORATION OF ST. STEPHEN'S CHAPEL, WESTMINSTER,

(LATE THE HOUSE OF COMMONS.)

Drawn and Engraved from Admeasurements and Surveys by special command, and at the expense of Her Majesty's Government; accompanied by an interesting Memoir, relating to the original and perfect state of the Building, grounded upon the best authorities.

By Mr. FREDERICK MACKENZIE.

Mr. Mackenzie's talented Services as an artist, and his research as an antiquary on the subject of the Gothic Style of Architecture in this country, of which St. Stephen's is one of the finest examples, was secured by the Office of Woods and Works soon after the Fire; since which much thought, time, and labour have been devoted to its perfect developement. Government have most liberally come forward, at a great expense, to secure to the country a well authenticated and illustrative example of this Renowned Edifice.

9.

In 8vo., Price 2s. 6d.

MANUAL OF REFERENCE TO THE ARCHITECT AND ENGINEER.

A CATALOGUE of Books on the Subjects of ARCHITECTURE; ENGINEERING, Civil, Military, and Mechanical; NAVAL ARCHITECTURE; and the Arts and Manufactures of the Country. Classed, with an Index of the names of Authors, &c.

By JOHN WEALE.

10.

Second Edition in 8vo., extra cloth boards, 10 Plates, Price 7s. 6d.

PERSPECTIVE SIMPLIFIED;

Containing a new PRELIMINARY CHAPTER, in which the subject is treated in the most plain and easy manner, for the convenience of readers not acquainted with Geometry.

By Z. LAURENCE, Esq.

11.

In 4to., with Wood-cuts, and 4 fine Engravings by JOHN LE KEUX, Price 7s. 6d.

AN ACCOUNT OF THE ROOF OF KING'S COLLEGE CHAPEL, CAMBRIDGE.

By F. MACKENZIE, Author and Draughtsman of some of the finest Architectural Works.

12.

4to., Price £1. 1s. Revised and corrected.

THE CARPENTER AND JOINER'S ASSISTANT.

Containing Practical Rules for making all kinds of Joints, and various methods of hingeing them together; for hanging of Doors; for fitting up Windows and Shutters; for the construction of Floors, Partitions, Soffits, Groins, Arches for Masonry; for constructing Roofs in the best manner from a given quantity of Timber, &c. Also Extracts from M. Belidor, M. du Hamel, M. de Buffon, &c., on the Strength of Timber. Illustrated with 79 Plates.

By PETER NICHOLSON, Architect.

13.

DOMESTIC ARCHITECTURE.

In large 4to., with 19 fine Engravings, Price £1. 1s. extra cloth boards, or on large paper, proof impressions, Price £1. 11s. 6d.

ARCHITECTURA DOMESTICA.

By A. DE CHATEAUNEUF, Architect, of Hamburgh.

Being a Series of very tasty examples of Interiors and Exteriors of Residences of the Gentry erected in Hamburgh and its neighbourhood; principally in the Italian Style, with Ornamental Pleasure Grounds, Verandas, detached Cottages, &c., &c.

LIST OF PLATES.

1. Seat in the park at Ham of Charles Sieveking, Esq., Syndic of the city of Hamburgh; also, Cottage of Cæsar Godeffroy, Esq.
2. Gardner's Lodge of wood, orangery, &c., near Lubeck.
3. Dwelling House in Ham Park, with Grecian interior, and plan.
4. Details, veranda, &c.
5. Saloon, with wood ornaments and fittings.
6. Plan of house and grounds, and view of Dr. Buchholtz's House, near Lubeck.
7. & 8. Plans and elevations of Houses, with sections, in the Italian style, erected on the basin of Alster.
9. Club House in the Farnesian style, with plan, and an interior section.
10. Monuments of the families of Sieveking and Nolting, in the new church-yard near Lubeck.
11. to 18. The House of Dr. Augustus Abendroth. "The arrangement of this house, as the residence of a wealthy family, which, on occasion of great festivities, desires to display a noble magnificence, will be easily understood by the plans, sections, and details."

The illustrations consist of plans of ground and principal story, terraces, &c.; Plans, out-houses, and offices, decorative ceilings, grand façade, longitudinal section, details of windows, consoles, &c.; Grand marble decorative staircase, grand fresco and statue hall, &c.
19. Grand entrance porch, door, &c.

Mr. CHATEAUNEUF, in conjunction with Mr. MEE, was one of the successful competitors of the New Royal Exchange Designs.

14.

In 8vo., Price 1s.

THOUGHTS ON THE ABUSES OF THE PRESENT SYSTEM OF COMPETITION IN ARCHITECTURE,

With an outline of a plan for their remedy.

In a Letter to EARL DE GREY, President of the Royal Institute of British Architects.

By HENRY AUSTIN.

15.

Engraved in aquatinta and coloured, 38 Plates. Quarto. Price £1. 4s.

ARCHITECTURAL SKETCHES FOR COTTAGES, RURAL DWELLINGS, AND VILLAS;

With Plans, suitable to persons of genteel life and moderate fortune, proper for Picturesque Buildings.

By R. LUGAR, Architect.

16.

In 8vo., with Plates, extra cloth boards, Price 10s. 6d.

CEMENTS.

A PRACTICAL and SCIENTIFIC TREATISE on the Choice and Preparation of the Materials for, and the Manufacture and Application of, Calcareous Mortars and Cements, Artificial and Natural, founded on an Extensive Series of Original Experiments. By M. L. J. VICAT, Chief Engineer of Roads, &c. Translated from the French, with numerous and valuable Additions, and Explanatory Notes, comprehending the most important known Facts in this Science, and with additional new Experiments and Remarks.

By Captain J. T. SMITH, Madras Engineers.

17.

Third Edition, with 28 additional Plates, Edited by PETER BARLOW, Esq., F.R.S., M.I.C.E., in extra half-morocco, Price £2. 2s.

ELEMENTARY PRINCIPLES OF CARPENTRY, AND ON CONSTRUCTION,—WITH SUPPLEMENT.

A Treatise on the Pressure and Equilibrium of Beams and Timber Frames, the Resistance of Timbers, and the Construction of Floors, Roofs, Centres, Bridges, &c.; with Practical Rules and Examples. To which is added, an Essay on the Nature and Properties of Timber; including the methods of Seasoning, and the causes and Prevention of Decay; with Descriptions of the Kinds of Wood used in Building: also numerous Tables of Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. Illustrated by 50 Engravings.

By THOMAS TREDGOLD, Civil Engineer.

18.

In Quarto, 28 fine Plates, Price £1. 1s.

SUPPLEMENT TO TREDGOLD'S ELEMENTARY PRINCIPLES OF CARPENTRY, AND ON CONSTRUCTION.

Sold separately for the convenience of those possessing the former Edition.

Comprising Engravings of Iron and Timber Roofs of Italian Palaces, Churches, Theatres, &c.; of a Juvenile Prison, Pantheon Bazaar, &c., &c., by Mr. SYDNEY SMIRKE; Iron and Timber Roof, &c., of Christ's Hospital and St. Dunstan's in the West, by Mr. JOHN SHAW; Timber Roofs of White Conduit House Tavern and others, by Mr. DUNCAN; Iron and Timber Construction of Croydon Railway Station, by Mr. JOS. GLYNN; Iron and Timber Roofs of the Trent Water-works, Nottingham, and the Roofs of the Model Room, the Smithery, and Engine Manufactory, at Butterley, by Mr. JOS. GLYNN; with Mr. MACKENZIE's elaborate Drawings of the Construction of King's College Chapel, Cambridge. The whole described by the different Contributors, and edited by Mr. BARLOW.

19.

In demy 8vo., with 107 Wood-cuts, extra cloth boards, Price 7s.

EXPERIMENTAL ESSAYS ON THE PRINCIPLES OF CONSTRUCTION IN ARCHES, PIERS, BUTTRESSES, &c.

Made with a view to their being useful to the Practical Builder.

By W. BLAND, Esq., of Hartlip, Kent.

20.

8vo., with Plates, Price 7s.

VENTILATION, WARMING, AND TRANSMISSION OF SOUND.

REPORT OF THE COMMITTEE OF THE HOUSE OF COMMONS ON VENTILATION, WARMING, AND TRANSMISSION OF SOUND.

Abbreviated, with Notes. By W. S. INMAN, Architect, F.I.B.A.

21.

In 8vo., illustrated with a very fine Frontispiece of ST. PAUL'S CATHEDRAL, by GLADWIN. Extra cloth boards, Price 10s. 6d.

THE PROFESSIONAL PRACTICE OF ARCHITECTS AND THAT OF MEASURING SURVEYORS,

And Reference to BUILDERS, &c., &c., from the time of the celebrated EARL OF BURLINGTON.

By JAMES NOBLE, Architect, F.I.B.A.

22.

In Imperial 4to., with 50 fine Engravings and 2 fine Wood-cuts of the past and present Entrances at Hyde Park Corner, suggested for insertion, and the Drawings contributed by DECIMUS BURTON, Esq. Half-bound in morocco, Price £2. 8s.

DESIGNS OF ORNAMENTAL GATES, LODGES, PALISADING, AND IRON WORK OF THE ROYAL PARKS,

With some other Designs equal in utility and taste, intended for those designing and making Parks, Terraces, Pleasure-walks, Recreative grounds, &c.; principally taken from the executed works of Decimus Burton, Architect, John Nash, Architect, Sydney Smirke, Architect, Sir John Soane, Architect, Robert Stevenson, C.E., Sir John Vanbrugh, Architect, and Sir Christopher Wren, Architect.

THE FOLLOWING IS A LIST OF THE SUBJECTS.

1. Gates to the Royal Entrance to St. James's Park.
2. Compartment of ditto, enlarged.
3. Plan of St. James's Park.
4. Plan of Hyde Park.
5. Plan of Regent's Park.
6. Marble Arch, Buckingham Palace, plan and elevation.
7. Pimlico Lodge of ditto, plan and elevation.
8. Colonnade, Hyde Park, entrance from Piccadilly, plan and elevation.
9. Entrance of the Green Park, Piccadilly, front and side elevations and plan.
10. Hyde Park Lodge, front and side elevations and plan.
11. Humane Society Receiving House, plan and elevation.
12. Grosvenor Lodge, front and side elevations and plan.
13. Stanhope Lodge, front and side elevations and plan.
14. Cumberland Lodge, front and side elevations and plan.
15. Gloucester Lodge, elevation and plan.
16. Hanover Lodge, elevation and plan.
17. Lamp at Hyde Park Corner, with the details.
18. Gates centre of Colonnade, Hyde Park.
19. Details of ditto, quarter full size.
20. Railing at the head of the Serpentine River, Dwarf Gates to Royal Entrance, Dwarf Railing to Lodge, Hyde Park.
21. Stanhope Gate Railing, Hyde Park.
22. Cumberland Gate Railing, Hyde Park.
23. Parts and Details of preceding.
24. Railing, Park Square, Regent's Park.
25. York Gates Railing, Regent's Park.
26. Railing, York Terrace, ditto.
27. Railing, Chester Terrace, ditto.
28. Railing to Cambridge and Gloucester Terraces, ditto.
29. Foot-gate and hall of Carriage-gate, Cambridge Place, ditto.
30. Railing, Gloucester Gate, ditto.
31. Railing, Clarence Gate, ditto.
32. Ditto,   ditto,   ditto.
33. Railing, Hanover Gates, ditto.
34. Railing, Sussex Terrace, ditto.
35. Railing, Hanover Terrace, ditto.
36. Lamp and Railing, Chelsea Hospital.
37. Parts of Iron Work ditto, to a larger scale.
38. Gates, Hampton Court, (Sir C. Wren.)
39. Ditto,   ditto,   ditto.
40. Parts of Iron Work, ditto.
41. Iron Work of King's Staircase, ditto.
42. Iron Work of Queen's Staircase, ditto.
43. Plan and Elevation of Entrance Lodges and Iron Gates at Greenwich, (Sir C. Wren.)
44. Ditto, ditto, larger scale.
45. Iron Gates at Gunnersbury Park.
46. Plan, Elevation, and Details of ditto.
47. Old Buckingham Palace Entrance, Iron Gates in 1737.
48. Lamp, Stirling Castle.
49 & 50. Elevations of Gates and Palisading at the Palace of the Grand Sultan at Constantinople.

The whole accurately and tastefully engraved on steel, being made applicable as working drawings, and as examples of a superior style.

23.

8vo., with Plates, Price 7s.

COTTAGES AND HOUSES FOR THE PEASANTRY AND EMIGRANTS.

ELEMENTARY AND PRACTICAL INSTRUCTIONS ON THE ART OF BUILDING COTTAGES AND HOUSES FOR THE HUMBLER CLASSES.

An Easy Method of Constructing Earthen Walls, adapted to the Erection of Dwelling-houses, Agricultural, and other Buildings, surpassing those built of Timber in comfort and stability, and equalling those built of Brick, and at a considerable saving. To which are added, Practical Treatises on the Manufacture of Bricks and Lime; on the Arts of Digging Wells and Draining; Rearing and Managing a Vegetable Garden; Management of Stock, &c. For the use of Emigrants; for the better Lodging of the Peasantry of Great Britain and Ireland; and the Improvement of those Districts to which the benevolence of Landed Proprietors is directed.

By WILLIAM WILDS, Surveyor.

The work contains :—

CHAP. I. The Art of Constructing Houses and Cottages with Earthen Walls made easy, being intelligible to all classes, and to the most ignorant in building, with Wood-cuts of tools, plans and sections, &c.

II. On Bricks, how they are to be advantageously applied in conjunction with rammed earth; rules for selecting the best earth, &c.

III. On the Manufacture and Choice of Bricks.

IV. On the Properties, Uses, and Manufacture of Lime.

V. On Well-digging, Draining, Well-sinking, &c.; on Fuel, on Gardening ; what quantity of Land will keep a Family in culinary Vegetables ; Pork, Eggs, Milk, and Bread Corn ; on the Keeping of Cows, Hogs, Poultry, Bees, and Art of making of Candles, Soap, Storing Fruit, Roots, &c.

24.

Very neatly half-bound in morocco, gilt tops, Price £3. 3s.

ARCHITECTURE OF THE METROPOLIS.

DEDICATED TO SYDNEY SMIRKE, ESQ., ARCHITECT, F.R.A., F.G.S.

A New and considerably Enlarged Edition, with many Additional Subjects and Plates, of

ILLUSTRATIONS OF THE PUBLIC BUILDINGS OF LONDON,

In Two Volumes 8vo., with 165 Engravings, originally edited by the late Augustus Pugin, Architect, and John Britton, F.S.A., &c., and now newly Edited and Enlarged

By W. H. LEEDS.

Manifold as are the publications which represent the various structures of the metropolis, this is the only work which describes them, not *ad libitum*, in views which, even when perfectly correct, show no more than the general aspect and locality of each building from a certain point, and consequently afford no information beyond mere external appearance—but exhibits them *architecturally* by means of plans, elevations, and occasionally both sections and interior perspective views. Thus a far more complete and correct knowledge may be obtained of each edifice, in its entire arrangement in all its parts and dimensions, than by pictorial views of them.

As studies for the Architect, the subjects contained in these volumes strongly recommend themselves,—more particularly so, as of the majority of them no plans and elevations are to be met with in any other publication, which materially enhances the interest of this collection, and it preserves to us authentic and tolerably complete records of many buildings which no longer exist. Among these are Carlton House, illustrated with several Plates, including sections, and a plan of the private apartments; the late English Opera House; Mr. Nash's Gallery, which has since been dismantled of its embellishments; and The Royal Exchange.

Among the subjects introduced in this New Edition will be found the following:—The Travellers' Club House—London University—St. George's Hospital—Gateway, Green Park—Post Office—Fishmongers' Hall—St. Dunstan's, Fleet Street, &c., &c.

25.

Royal 8vo., 18 Engravings, cloth boards, Price 10s. 6d.

ILLUSTRATIONS OF THE PUBLIC BUILDINGS OF LONDON,

With descriptive Accounts of each Edifice.

SUPPLEMENT:

Containing the New Subjects, and Descriptions by W. H. Leeds, incorporated in the second edition, and now sold separate for the accommodation of those possessing the first edition.

Also a few copies in Imperial 8vo. for large paper copies of the first edition, Price 15s.

26.

In demy 8vo., cloth boards, Price 9s.

A TREATISE ON THE LAW OF DILAPIDATIONS AND NUISANCES.

By DAVID GIBBONS, Esq., of the Middle Temple, Special Pleader.

Dedicated to the Honourable Sir John Taylor Coleridge, Knt., one of her Majesty's Justices of the Court of Queen's Bench.

27.

Wood-cuts, 8vo.   Price 4s. 6d.

AN ESSAY ON THE CONSTRUCTION OF THE FIVE ARCHITECTURAL SECTIONS OF CAST-IRON BEAMS,

Employed as Girders, Bressummers, and other Horizontal Supports for Buildings, &c.

By WILLIAM TURNBULL.

28.

Le prix de chaque livraison de 6 feuilles sur colombier ordinaire est de 6 shillings—sur colombier vélin, de 10 shillings.

EDIFICES DE ROME MODERNE,

DESSINÉS, MESURÉS, ET PUBLIÉS PAR P. LETAROUILLY, ARCHITECTE.

Parmi les villes modernes, Rome, considérée sous le rapport de son architecture, mérite sans contredit, d'être placée au premier rang. Depuis près de quatre siècle elle n'a cessé de s'enrichir d'édifices de tous genres, souvent construits sous la direction des architectes les plus célèbres, de sorte qu'on y trouve aujourd'hui la belle comme la plus nombreuse réunion de monuments.

Rien ne serait plus profitable pour l'étude que la réproduction par la gravure de tant de chef-d'œuvres; car il est incontestable que les exemples, surtout exprimés par des figures, pénètrent mieux dans la pensée que des théories abstraites, et qu'ils y laissent une impression plus profonde et plus durable. Un recueil qui mettrait ainsi à la portée de tout le monde un si grand nombre de beaux modèles serait d'un prix infini pour tous. Le maître moderne l'élève y puiserait des enseignements précieux, et dans la *pratique* de l'art il pourrait d'en un usage continuel.

Cet ouvrage vient d'être exécuté et nous nous empressons de l'annoncer. Il offre une riche collection de plans, de façades et de détails : on y trouve reproduits avec une précision remarquable et une grande fidélité dans les mesures, les œuvres admirables des maîtres illustres de la renaissance qui ont été si bien inspirés par les monuments antiques qu'ils avaient sous les yeux et qu'ils consultaient sans cesse.

L'auteur devait borner sa publication à la partie qui est aujourd'hui achevée, laquelle se compose d'un volume in folio de 115 planches, du plan général de la ville et d'un volume de texte in quarto:

et dont le prix est de £6. 6s.—avec demi reliure £6. 16s. 6d.

Mais les encouragements qu'il a obtenu l'ont déterminé à entreprendre un second voyage à Rome pour y compléter son travail. Déjà même 5 livraisons de ce complément sont en vente. On trouvera dans cette seconde partie des monuments du plus haut intérêt et la plupart placés au premier rang dans l'opinion des artistes : il suffira de citer les palais Farnese, Girand, du Vatican, Negroni, Corsini, Sciarra Barberini . . . . . puis de belles Eglises, des Cloîtres, des Fontaines et plusieurs Villa.

Parts 19 and 20, to complete the many sets of 18 livraisons sold in England, to be had separately.

29.

DU MÊME AUTEUR,

Prix, sur vélin 10 shillings, sur chine 12 shillings.

PLAN DE ROME MODERNE,

AVEC L'INDICATION DES MONUMENTS ANTIQUES.

Cette gravure, terminée au burin et ornée de groupes de monuments et de figures allégoriques, peut servir à décorer le cabinet des architectes et des ingénieurs, aussi bien que la bibliothèque des savans et des hommes de lettres.

30.

16 Plates, large 4to., Price 16s.

DESIGNS FOR RURAL CHURCHES.

By GEORGE E. HAMILTON, Architect.

31.

The Sixth Edition, Price 18s. bound.

THE PRACTICAL HOUSE CARPENTER, OR YOUTH'S INSTRUCTOR;

Containing a great variety of useful Designs in Carpentry and Architecture; as Centering for Groins, Niches, &c.; Examples for Roofs, Skylights, &c.; Designs for Chimney-pieces, Shop Fronts, Door Cases; Section of a Dining-Room and Library; variety of Staircases, with many other important Articles and useful Embellishments. The whole illustrated and made perfectly easy by 148 4to. Copper-plates, with Explanations to each.

By WILLIAM PAIN.

32.

With Plates, Imperial 8vo., cloth boards, £1. 1s.

CLARKE'S ELIZABETHAN ARCHITECTURE.

CONTENTS.

Wimbledon House, Surrey, built by Sir Thomas Cecil, 1588.
Easton House, Essex, Sir Henry Maynard.
Aston Hall, Warwickshire, Sir Thomas Holt.
Grafton Hall, Cheshire, Sir Peter Warburton.
Stanfield Hall, Norfolk, family of Flowerdews.
Seckford Hall, Thomas Seckford.
Bramshill House, Hampshire.
Penn Place, Kent, Lord Zouch.
Queen's Head, Islington, Sir Walter Raleigh.
Chaselton, Oxfordshire, Walter Jones.

Brereton Hall, Cheshire, Sir Walter Brereton.
Holland House, Middlesex, Sir Walter Cope.
Haughley House, Suffolk.
Streete Place, Sussex, Dobell.
Montacute House, Somersetshire, Sir Edward Phillips.
Westwood House, Worcestershire.
Wakehurst Place, Sussex, Sir Edward Culpeper.
Carter's Corner, Sussex.
Eastbury House, Essex, Lord Monteagle.
East Mascull, Sussex, Newton.
Old House, near Worcester, &c.

33.

Sixty Plates, Title-page printed in colours and gold, elegantly half-bound in morocco, and lettered, Price £1. 16s.

SPECIMENS OF THE ARCHITECTURE OF THE REIGNS OF QUEEN ELIZABETH AND KING JAMES I.,

From Drawings by CHARLES JAMES RICHARDSON, GEORGE MOORE, and other Architects, with Observations and Descriptions of the Plates.

Eighteen Plates illustrate the Old Manor House, the Gardens, Terraces, &c., at Claverton, the Seat of George Vivian, Esq.—six the Duke of Kingston's Picturesque House at Bradford—and eight the princely Mansion of Lord Holland at Kensington.

The volume contains examples of Ceilings, Porches, Balustrades, Screens, Staircases, Monuments, Pulpits, &c.; and a rich collection of Facsimiles of Old English Drawings, chiefly of John Thorpe, the most eminent Artist in Queen Elizabeth's time.

34.

Supplementary and Fifth Volume to the Antiquities of Athens, by R. C. Cockerell, Esq., &c.

ANTIQUITIES OF ATHENS AND OTHER PLACES OF GREECE, SICILY, &c.

Supplementary to the Antiquities in Athens, by JAMES STUART, F.R.S., F.S.A., and NICHOLAS REVETT; delineated and illustrated by R. C. Cockerell, R.A., F.S.A., W. Kinnard, T. L. Donaldson, Member of the Institute of Paris, W. Jenkins, and W. Railton, Architects.
Imperial folio, uniform with the Original Edition of Stuart and Revett, and the Dilettanti Works. Very finely printed, and with numerous beautiful Plates of Plans, Elevations, Sections, Views, Ornaments, &c. In extra cloth boards and lettered, Price £6. 12s.

35.

12mo., Price 3s. 6d.

A MANUAL OF THE LAW OF FIXTURES.

By DAVID GIBBONS, Esq., of the Middle Temple, Special Pleader.

, A work purposely written for the use of Builders, House Agents, and House and Land Proprietors.

36.

Price 2s. 6d., pocket size, boards.

THE BUILDING ACT (at Large), side References.

With Extracts from the Sweeps' Acts; and with Explanatory Notes and Cases.

By A. AINGER, Architect.

37.

Second Edition, 4to., Price £1. 1s.

DESIGNS FOR VILLAS AND OTHER RURAL BUILDINGS.

By the late EDMUND AIKIN, Architect.

Engraved on 31 Plates, with Plans and Elevations, coloured, and an Introductory Essay, containing Remarks on the prevailing Defects of Modern Architecture, and on the Investigation of the Style best adapted for the Dwellings of the Present Times. Dedicated to the late Thomas Hope, Esq.

'Modern Architects profess to imitate antique examples, and do so in columns, entablatures, and details, but never in the general effect. Is it that they imitate blindly, and without penetrating into those principles and that system

which is superior to the details that guide them? This is a subject which it may be useful and interesting to pursue.' —Vide Introduction.

38.

In 4to. Plates, very neatly coloured, cloth boards and lettered, Price 16s.

A SERIES OF DESIGNS FOR VILLAS AND COUNTRY HOUSES,

Adapted with Economy to the Comforts and to the Elegancies of Modern Life, with Plans and Explanations to each.

By C. A. BUSBY, Architect.

39.

A new Edition in the Press, with 78 very fine Plates, royal folio, neat in cloth boards and lettered, Price £3. 3s.

THE UNEDITED ANTIQUITIES OF ATTICA.

By the Society of Dilettanti. Comprising the Architectural Remains of Eleusis, Rhamnus, Sunium, and Thoricus.

40.

In 4to., with 5 Plates, in boards, Price 10s. 6d.

OBSERVATIONS ON THE CONSTRUCTION AND FITTING UP OF MEETING HOUSES, &c., FOR PUBLIC WORSHIP;

Illustrated by Plans, Sections, and Descriptions, including one erected in the City of York; embracing, in particular, the METHOD of WARMING and VENTILATING.

By Mr. ALEXANDER, of York.

⁎ This work is quoted and recommended by Tredgold in his work on a similar subject.

41.

In small 8vo., for a Pocket-Book.   A New Edition, with the Government Tables of Annuities. Price 7s. boards.

TABLES FOR THE PURCHASING OF ESTATES,

Freehold, Copyhold, or Leasehold, Annuities, &c., and for the Renewing of Leases held under Cathedral Churches, Colleges, or other Corporate Bodies, for Terms of Years certain, and for Lives; also, for valuing Reversionary Estates, Deferred Annuities, Next Presentations, &c.   Together with several useful and interesting Tables connected with the subject.   Also, the Five Tables of Compound Interest.

By W. INWOOD, Architect and Surveyor.

42.

2 vols. 4to., upwards of 70 Plates and Wood-cuts, Price £2. 2s.

LETTERS OF AN ARCHITECT FROM FRANCE, ITALY, AND GREECE;

Or, CRITICAL REMARKS on CONTINENTAL ARCHITECTURE, ANCIENT and MODERN, and on the CLASSIC ARCHITECTURE of GREECE. Written in a Series of Letters.

By JOSEPH WOODS, F.A.S., F.L.S., F.G.S., &c.

43.

Royal 4to., with Plates. Price £1. 1s.

PROLUSIONES ARCHITECTONICÆ;

Or, ESSAYS on Subjects connected with GRECIAN and ROMAN ARCHITECTURE. Illustrated by Forty Engravings by eminent Artists. Dedicated, by permission, to EARL GREY, K.G.

By WILLIAM WILKINS, A.M., R.A., F.R.S.,

Formerly a Senior Fellow of Caius College, in the University of Cambridge; Professor of Architecture in the Royal Academy of Arts.

44.

THE ARCHITECT AND STUDENT'S OFFICE MANUAL.

Being a condensation of different Examples of Grecian, Roman, and Gothic Architecture, from the time of Pericles to the reign of Queen Elizabeth, elaborately drawn to a conveniently large scale for immediate use and application in all the purposes of reference in the moments of office business.

The work will consist of about 24 Plates, Atlas folio; to be published in 3 Parts, Price 7s. 6d. each; showing diffused details and modes of construction as used by the ancients and moderns in the erection of their Temples, Domestic Buildings, &c., &c.

45.

A new Edition in the Press, 4to., Price £1. 1s. Corrected and enlarged.

THE CARPENTER'S NEW GUIDE.

Being a complete Book of Lines for Carpentry and Joinery, treating fully on Practical Geometry, Soffits, Brick and Plaster Groins, Niches of every description, Skylights, Lines for Roofs and Domes; with a great variety of Designs for Roofs, Trussed Girders, Floors, Domes, Bridges, &c. Copperplates: including some Observations and Calculations on the Strength of Timber.

By P. NICHOLSON.

46.

In the Press, 4th Edition, improved and enlarged, edited by EATON HODGKINSON, Esq., of Manchester.

A PRACTICAL ESSAY ON THE STRENGTH OF CAST IRON AND OTHER METALS;

Intended for the Assistance of Engineers, Iron-Masters, Millwrights, Architects, Founders, Smiths, and others engaged in the Construction of Machines, Buildings, &c. Containing Practical Rules, Tables, and Examples, founded on a Series of new Experiments; with an extensive Table of the Properties of Materials. Illustrated by Eight Plates and several Wood-cuts.

By THOMAS TREDGOLD, Civil Engineer.

47.

Gothic Architecture.

In Imperial 8vo., Price 16s. in extra cloth boards, and lettered.

A SERIES OF ANCIENT BAPTISMAL FONTS, NORMAN, EARLY ENGLISH, DECORATED ENGLISH, AND PERPENDICULAR ENGLISH.

Drawn by F. SIMPSON, Jun., and Engraved by R. ROBERTS.

Containing 40 very beautifully engraved Plates, in the best style of the Art, and the Text written by an accomplished and talented Gentleman, whose attainments in Architecture and as an Antiquary are well known and appreciated.

A few copies on large paper, Price £1. 8s.; and only three copies India proofs, with Etchings, at £2. 2s.

48.

MEMORIALS OF ANCIENT GERMAN GOTHIC ARCHITECTURE;

Or, the ARCHITECTURAL ANTIQUITIES OF GERMANY.

By GEORGE MOLLER, of Darmstadt, Architect to the Grand Duke of Hesse.

2 vols. folio, with 130 Plates, a Description of each Edifice, and an Essay on the Origin and Progress of Gothic Architecture, with reference to its Origin and Progress in England; in the German Language, accompanied by an English Translation.

By W. H. LEEDS.

'The Transition, or Early German, has not yet, so far as I know, received much distinct attention. Dr. Moller, however, in the course of his valuable Denkmaehler, has recently given us excellent representations of the Cathedral at Limburg, on the Lahn, which is a very admirable specimen of this kind; and has noticed the intermediate and transition place which this edifice seems to occupy in the development of the German style.'—Whewell's Notes on German Churches, p. 28.

'Dr. Moller's work (Denkmaehler der Deutschen Bau-

kunst) already contains excellent specimens of every style of German buildings, and offers additional interest and beauty in each new number.'—Whewell's Notes on German Churches, pp. 88, 29.

'The Church of St. Catharine, at Oppenheim, near Worms, also in part a ruin, is another fine example of this style, and has been worthily illustrated in the magnificent work of Dr. Moller.'—Whewell's Notes on German Churches, p. 113.

Several copies of Seventy-two Plates, making Vol. I., have been sold in this country: some copies of the 2nd Vol. to make up these sets can be had for £2. 12s. 6d.

49.

8vo., cloth boards, and lettered, Price 8s.

THE TEXT OF MOLLER'S GERMAN GOTHIC ARCHITECTURE,

Translated. With Notes and Illustrations by W. H. LEEDS.

Separate from the folio.

50.

Ornaments.

GRECIAN ORNAMENTS.

A SERIES of EXAMPLES, in 21 Plates, of GRECIAN ORNAMENT, in royal folio, very finely Engraved from Drawings made by the most celebrated Architects.   Price 15s.

CONTENTS OF THE WORK.

Details of the Ceiling of the Propylæa, at Eleusis.

Order of the Ante of the Inner Vestibules, at Eleusis.

Capital of the Ante at large, at Eleusis.

Fragments found at Eleusis.

Tiles and other Details of the Temple of Diana Propylæa, at Eleusis.

Capitals and Profile of the Temple of Nemesis, at Rhamnus.

Ornamental Moulding, Jambs, Mouldings of Interior Cornice, the Painted Mouldings of the Panels of the Lacunaria, &c., &c., of the Temple of Nemesis, at Rhamnus.

Details of the Roof, Tiling, &c., of the Temple of Nemesis, at Rhamnus.

The Chairs and Sepulchral Bas-reliefs found in the Cells of the Temple of Themis, at Rhamnus.

Athenian Sepulchral Marbles, Capitals, and Triglyphs, at Delos.

Entablature of the Ante of the Portico at Roof, Ornaments, &c., of the Temple of Apollo Epicurus, at Bassæ.

Details of Sculptured and Painted Shafts of Columns of the Subterraneous Chamber, at Mycenæ.

Restored Elevation to the Entrance of the Subterraneous Chambers at Mycenæ, commonly called the Treasury of Atreus.

Marble Stele, in the possession of Mr. Gropius, at Athens.

Terracotta Antefixa, at Athens, and Marble Fragments from Delphi.

Pilaster Capitals from Stratonice and Halicarnassus.

Fragments from Halicarnassus, Teos, and Temple of Apollo, at Branchidæ, near Miletus.

Entasis of the Column of the Portico of the Propylæa.
— of the North Wing of the Propylæa.
— of the Temple of Theseus.
— of the Temple of Minerva, or Parthenon.
— of the Choragic Monument of Lysicrates.
— of the Columns of the North Portico of the Triple Temple, termed the Erechtheum.
— of the Columns of the East Portion of that Temple.
— of the Temple of Jupiter Panhellenius, at Ægina.
— of the Columns of the Pronaos of the same Temple.

This work is very desirable for Sculptors, Modellers, Masons, (in designing for Monuments, Tombs, Tablets, &c.,) Builders, and Architects.   Those who possess the Dilettanti work of the Unedited Antiquities of Attica, and the Supplementary Volume of Antiquities of Greece, Sicily, &c., will not need this work, as the subjects are selected from them.

51.

Tudor Architecture.

In folio size, Price £1. 1s. in boards.

BRIDGEN'S INTERIOR DECORATIONS, DETAILS, AND VIEWS OF SEFTON CHURCH, IN LANCASHIRE.

Erected by the Molineux family (the ancestors of the present Earl of Sefton), in the early part of the reign of Henry VIII.

The Plates (34 in number) display the beautiful Style of the Tudor Age in Details, Ornaments, Sections, and Views. Etched in a masterly style of Art.

52.

Royal folio size, bound, Price 15s.

MECHANICAL, CIVIL ENGINEERING, AND ARCHITECTURAL DRAWING BOOK.

A Series of Instructive Lessons for Architectural, Engineering, and Mechanical Drawing, in 30 large folio Engravings of recently constructed Works in England, with explanatory details, sectional parts, &c., with their dimensions; selected as an elementary and practical introduction to the professional student in the commencement of his career; also recommendatory for tuition at the Architectural and Engineering Classes at King's College, London, College for Civil Engineers, Durham College, Glasgow College, and the various scientific Schools throughout the United Kingdom.

FURNITURE AND INTERIOR DECORATIONS.

53.

Royal 4to., Price £1. 1s.

CHIPPENDALE'S 133 DESIGNS OF INTERIOR DECORATIONS IN THE OLD FRENCH STYLES, for Carvers, Cabinet-Makers, Ornamental Painters, Brass-Workers, Modellers, Chasers, Silversmiths, General Designers, and Architects. Fifty Plates 4to., consisting of Hall, Glass, and Picture-Frames, Chimney-Pieces, Stands for China, &c., Clock and Watch Cases, Girandoles, Brackets, Grates, Lanterns, Ornamental Furniture, and Ceilings.

54.

15 Plates, 4to., Price 10s. 6d.

SPECIMENS OF THE CELEBRATED ORNAMENTS AND INTERIOR DECORATIONS of the AGE of LOUIS XIV., selected from the magnificent work of Meissonnier.

55.

Price 15s. 18 Plates, on folio demy.

SHOP FRONTS AND EXTERIOR DOORS,

Displaying the most approved of London execution, and selected as being those of the best taste and greatest variety; drawn to a scale by accurate measurement, accompanied by the proper Sections and Plans, with several New Practical Designs: for the use of the Architect, Builder, and Joiner.

By T. KING.

56.

11 Plates, 4to., Price 7s.

CHIPPENDALE'S DESIGNS for Sconces, Chimney and Looking-Glass Frames, in the old French style: adapted for Carvers and Gilders, Cabinet-Makers, Modellers, &c.

57.

In large folio, 126 Plates, boards, Price £4. 4s.

ETCHINGS, representing the BEST EXAMPLES of ANCIENT ORNAMENTAL ARCHITECTURE, drawn from the Originals in Rome. FRAGMENTS of GRECIAN ORNAMENT. By C. H. TATHAM, Architect.

58.

On 33 folio Plates, engraved in imitation of Chalk Drawings, Price 15s.

ORNAMENTS DISPLAYED, on a full size for working, proper for all Carvers, Painters, &c., containing a variety of Accurate Examples of Foliage and Friezes.

59.

3 Parts, Price £1. 10s.

WORKING ORNAMENTS AND FORMS,

Full size, for the use of the Cabinet Manufacturer, &c. &c.

By T. KING.

Important Works on Engineering.

60.

TREDGOLD ON THE STEAM ENGINE
AND ON STEAM NAVIGATION.

These very valuable volumes, comprising 125 elaborately engraved Plates, are, in Sections, Elevations, Plans, Details, &c., of the highest utility to the Engineer and Student, to Manufacturers of Marine, Locomotive, and Land Engines;—the science of Steam Engine making being explained by the most eminent practical men of Britain. In 2 vols. 4to., and the Plates in folio, price £4. 4s., entitled

THE STEAM ENGINE;

Comprising an account of its invention and progressive improvement, with an INVESTIGATION of its PRINCIPLES, and the PROPORTIONS of its PARTS for EFFICIENCY and STRENGTH; detailing also its application to NAVIGATION, MINING, IMPELLING MACHINERY, &c., and the Result in numerous Tables for Practical Use, with Notes, Corrections, and New Examples, relating to Locomotive and other Engines.

The algebraic parts transformed into easy practical Rules, accompanied by Examples familiarly explained for the Working Engineer, by Mr. WOOLHOUSE; with an ample

APPENDIX,

Containing, besides a vast acquisition of Practical Papers, an Elementary and Practical Description of Locomotive Engines now in use, illustrated by Examples; and the Principles and Practice of Steam, for the purposes of Navigation either in Rivers or at Sea; showing its present and progressive state, by illustration of the various Examples of Engines constructed for Sea, War, and Packet Vessels, and River Boats, by the most eminent Makers of England and Scotland, drawn out in Plans, Elevations, Sections, and Details, with a Scientific Account of each, and on

STEAM NAVAL ARCHITECTURE,

Showing, by existing and the latest Examples, the Construction of War, Sea, and Packet Vessels: their Naval Architecture, as applied to the Impelling Power of Steam for Sea and River purposes. This portion of the work is edited by several very eminent Ship Builders—

OLIVER LANG, Esq., of H. M. Dockyard, Woolwich.
J. FINCHAM, Esq., H. M. Dockyard, Chatham.
T. J. DITCHBURN, Esq., Blackwall.

The new subjects in this edition consist of the works of

Messrs. Boulton and Watt.
The Butterley Company.
Messrs. Maudslay, Sons, and Field.
Messrs. Seaward.
Robert Napier, Esq., Glasgow.
Messrs. Fairbairn and Murray.

William Morgan, Esq.
Messrs. Hall, Dartford.
Edward Bury, Esq., Liverpool.
Messrs. Hague.
Messrs. Claude, Girdwoord, and Co.
Messrs. R. Stephenson and Co., Newcastle upon Tyne.

LIST OF PLATES.

1. Isometrical projection of a rectangular steam boiler.
2. Two sections of a cylindrical steam boiler.
3. Brunton's apparatus for feeding furnaces by machinery.
4. High pressure engine with four-passaged cock.
5. Section of a double acting condensing engine for working expansively.
6. Section of a common atmospheric engine.
7. Represents the construction of pistons.
8. Parts of Benton and Murray's double engine.
9. Apparatus for opening and closing steam passages.
10. (A.) 10 (B.) Parallel motions or combinations used to produce rectilinear motion from motion in a circular are.
11. Plan and elevation of an atmospheric pumping engine for raising water from a mine.
12. Boulton and Watt's single acting engine.
13. Double acting engine for raising water.
14. —————————— for impelling machinery, by Fenton, Murray, & Co.
15. Maudslay's portable engine.
16. Indicator for measuring the force of steam in the cylinder.
    Diagrams to illustrate the comparative stability of opposite classes of vessels.
17. Section of a steam vessel with its boiler in two parts.
18. Isometrical projection of a steam boat engine as first arranged by Boulton and Watt.
19. Section and plan of steam boat engine.

20. Side elevation and cross section of a steam carriage.
21. Kingston's valve.
    —— blow-off valves.
    —— injection valves.
    —— hand pump valves.
22. Boilers of Her Majesty's steam vessel African.
23. Boilers of Her Majesty's steam frigate Medea.
24. Paddle Wheels of Morgan and Seaward.
25. Positions of a float of a radiating wheel, and also of a vertical acting wheel, in a vessel in motion.
26. Cycloidal paddle wheel fitted to the Great Western.
27, 28. Illustrate Captain Oliver's steaming and sailing.
29. Exhibits the various situations of a trial at sailing of the Medea, with the Caledonia, Vanguard, and Asia.
30. Side view of the engines of the Red Rover, and City of Canterbury, steam vessels.
31. Longitudinal section of ditto.
32. Cross section of engines of ditto.
33. Side elevation of engine of the Nile steam ship.
34. Plan of the engine of the Nile.
35, 36. Cross sections of engines of the Nile.
36, 37. Engines of Her Majesty's steam frigate Phœnix.
38. Engines of the Ruby Gravesend packet.
39. Section of one of the engines of the Don Juan Peninsula Company's packet.
40. Boilers of Her Majesty's ships Hermes, Spitfire, and Firefly.

'The first publication of Mr. Tredgold's work, on one of the most important mechanical and scientific subjects of our age, was so highly successful, that, besides being translated into the French and other languages, a new edition was imperatively called for. That call has been answered by the present enlarged work, in which have been embodied the progress and improved application of that mighty agent Steam, an investigation of its principles, and a practical view of its uses and effects in steam vessels, steam carriages, and railroads. When we look around us and see the face of the country changed and changing; the expedition of a week compressed into a single day; the limits of pleasure and of business widely extended among all classes of society; new wants created, and new wishes gratified; sedentary easily and readily converted into ambulatory life; the sphere of city homes, as it were, enlarged by a circle of rural miles;— where, in fact, we see the prodigious alteration made in our social, statistical, economical, political, national, and international system, by the growing powers of this vast engine, we cannot but consider the effort to offer us a just and comprehensive account of it to be one of the most meritorious within the scope of individual industry, skill, and labour. We, therefore, think the public deeply obliged to Mr. Tredgold, its author, and Mr. Weale, the enterprising publisher, who must have expended a very large sum on the risk, for the very important volumes now before us.

'It is apparent that it is a publication of great magnitude and great worth. Above a hundred plates of steam engines, &c., &c., illustrate its descriptions; and many wood-cuts serve further to render the contents plain and intelligible to every capacity. Thus the actual operations of such men as Boulton and Watt, Maudslay and Field, Seawards, Napier of Glasgow, and other eminent mechanicians, and, we may add, en-

lightened philosophers as well as experienced artisans, are explained to us, and set before our eyes so as to be palpable to the understanding. In the same way the locomotives of the Messrs. Stephenson, of Newcastle, the construction of the elegant Government steam boats of Mr. Lang, of Woolwich, and Mr. Fincham, of Chatham, (vessels it is a delight to notice as we pass up or down the river,) are rendered familiar to us; and we care little to vex ourselves about hypothetical improvements and untried experiments. We have witnessed so many pseudo certain and undeniable inventions fail, that we have become rather sceptical when we hear of patents that are to supersede all that has been done before, or listen to the dictatorial laws of people whom we have known to be more frequently wrong than right. We are glad to observe, however, that in this new edition most of the errors of the former have been corrected; and what questionable statements or mistakes may remain are not such as to impeach the vast utility of the publication.

'The Appendix, indeed, is deserving of much praise. The rules of practice are well expounded, and the mathematical calculations, remodified into simple arithmetic, are excellent for the purpose of enabling the working man to perform his duty.

'Upon the whole, not to dwell upon either real or supposed imperfections, inseparable from a production embracing so vast a number of complicated matters—a production treating of things in an almost daily state of partial transition—we feel bound to pronounce this treatise to be a very able and satisfactory exposition of the state of steam navigation and railroad travelling to the present time; and as such we heartily recommend it to the public at large, both at home and on the continent, where its predecessor has hitherto been esteemed a standard work.'—*Literary Gazette, August* 3, 1839.

61.

STEAM NAVIGATION.

Just published, in Atlas folio size, uniform with Telford's works and the Atlas copies to Tredgold,
Price £1. 12s.

APPENDIX A. AND B. TO THE NEW EDITION OF TREDGOLD ON THE STEAM ENGINE.

With Text in 4to.

CONTENTS OF PLATES.

1. Iron Steam Yacht *Glow-worm*, constructed by John Laird, Esq., Birkenhead, Liverpool
2, 3. Iron Steam Ship *Rainbow*, belonging to the General Steam Navigation Company, draught lines at bottom, fore body to a large scale, by ditto.
4. Plans of the engines of 90-horse power each, 50-inch cylinders, 4-6 stroke, made by G. Forrester and Co., of Liverpool, and fitted on board of the *Rainbow*.
5. Side elevation and section of ditto.
6. Transverse section of ditto.
7. Draught of the American Armed Steam Ship *Fulton*. Half the main breadth, 17 feet; distance between the water lines, 2 feet; fore and after body precisely alike.
8. Plans of the upper and lower decks of the Admiralty Yacht *Firebrand*, showing the fittings and conveniences; drawn by Mr. Lang, of Woolwich.
9, 10. Plans of the upper and lower decks of the Steam Ship *Neva*, constructed for Her Imperial Majesty the Empress of Russia, by Messrs. Fairbairn and Co., of Mill Wall, Poplar.

11, 12. Draught, section, and lines of bottom of Her Imperial Majesty's Iron Steam Yacht *Neva*.
13. Cross section of ditto, showing engines, construction of vessel, and paddles.
14. Body plan, cross section, and saloon; showing joinings, fittings, and decorations.
15. Mr. John Hague's twelve-horse condensing engine, in operation at the Arsenal of Woolwich; elevation, with dimensions of parts and references.
16. Longitudinal section, ditto, ditto.
17. Plan, ditto, ditto.
18. Section, showing boiler, &c., ditto.
19. End section, showing furnace, &c., ditto.
20, 21. Mr. Lang's mode of connecting the stem, stern post, and keel together, for any description of vessel; and Mr. Lang's method of framing the ribs and keels of Steam Vessels, with a plan of timbers expanded, sectional parts, with dimensions.
22. Chapman's draught lines of bottom, fore and aft bodies; and Mr. Whitelaw's, of Glasgow, new contrivances in the Steam Engine.

Several of these Plates are on large size, and consequently the more useful to practical men.

62.

In extra cloth boards, double lettered, Price 5s.

TREATISE ON THE IMPROVEMENT OF THE NAVIGATION OF RIVERS,

With a New Theory on the Cause of the Existence of Bars.

By WILLIAM ALEXANDER BROOKS, M.Inst.C.E.

63.

In 8vo., with two large Plates, and a Wood-cut explanatory of the invention, Price 2s. 6d.

A TREATISE ON THE ADAPTATION OF ATMOSPHERIC PRESSURE TO THE PURPOSES OF LOCOMOTION ON RAILWAYS.

By J. D'A. SAMUDA.

64.

Second Edition. In 8vo., boards, Price 6s.

METEOROLOGICAL OBSERVATIONS AND ESSAYS.

By JOHN DALTON, D.C.L., F.R.S., &c., &c.

65.

FLAX MACHINERY.

Preparing for Publication, an elaborate scientific and explanatory Work on the Machinery for Heckling, Making, and Spinning of Flax, for the many and valuable purposes for which it is used.

It is intended to publish this Work in 4 Parts, at 7s. 6d. each, in small Atlas folio size.

66.

In 2 Vols., very neatly half-bound in morocco or russia, gilt tops, Price £5. 5s.

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

67.

In 2 Vols., elegantly bound in russia or morocco, gilt leaves, Price £5. 15s. 6d.

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

*** This work has been selected as a Prize-book by the Institution of Civil Engineers, Colleges in which Engineering Science is taught, and several other Institutions, and by practical Engineers for presents to their Pupils.

68.

In 2 Vols., very neatly half-bound in red morocco, gilt tops; the Text in quarto, and the Plates printed separately on fine Columbier folio paper, Price £7. 7s.

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

69.

The Plates sold separately, on Columbier folio, very neatly half-bound in red morocco, gilt tops, Price £5. 5s.

TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION.

*** In many instances purchasers of the work in 2 vols. have also possessed themselves of these Plates in a separate form, not only for practical use and reference, but as a Table-book, to exhibit the splendour of the Steam Machinery of Britain.

70.

In 8vo., with 2 Plates, Price 2s. 6d.

REPORT ON THE IMPROVEMENT OF THE RIVERS MERSEY AND IRWELL,

Between Liverpool and Manchester; describing the Means of adapting them for the Navigation of Sea-going Vessels.

By HENRY R. PALMER, F.R.S., Vice-Pres. Inst.C.E.

71.

In 4to. size, with four elaborately engraved Plates, and numerous Wood-cuts of Details, Price £1. 1s. in cloth boards.

DESCRIPTION OF THE LOCOMOTIVE STEAM ENGINE BY ROBERT STEPHENSON, Esq.

*** The above Work is affixed to the publication of the 2nd edition of Tredgold, and has been published separately for the use of those who desire a perfect knowledge of the Locomotive Engine separate from other Steam Engines. The description is both popular and scientific. The Engravings are large, and are unique examples of mechanical engraving. The wood-cuts, 40 in number, are explanatory of such details of the Engine as cannot be shewn in the Elevation, Plan, Cross or Transverse Section; nor so well described in language as by the ocular demonstration of these, intermixed as they are with the descriptive text. It will be found that this extraordinary modern Engine, which owes its present improvements to the Stephensons, is made available to the million by being explained in the plainest language, and divested of mathematical formulæ.

72.

The Text in 1 large Vol. 8vo., and the Plates, upwards of 70 in number, in an Atlas folio Vol., cloth boards, Price £2. 5s.

PRACTICAL ESSAYS ON MILL WORK AND OTHER MACHINERY;

WITH EXAMPLES OF MODERN TOOLS, &c.

First Published by ROBERT BUCHANAN, M.E.; afterwards improved and edited by THOS. TREDGOLD, C.E.; and now re-edited, with the improvements of the present age,

By GEORGE RENNIE, F.R.S., C.E., &c., &c.

CONTENTS OF PLATES.

1 to 19. Consist of Plates of Mill Work and Machinery, published under the superintendence of the late Mr. Tredgold, and now reprinted.
20. Diagrams of Professor Willis on the teeth of wheels.
21. Bramah's original slide tool, with slide rest and head in one.
22. Bramah's lathe for turning sphere—elevation and end view.
23. Plan of do.
24. Messrs. Nasmyth, Gaskell, & Co.'s great boring lathe.
25. ———   face turning lathe.
26. Mr. F. Lewis's foot lathe.
27. ———   large boring lathe.
28. Messrs. Rennie's gun boring lathe.
29. Hicks's radial drilling machine.
30. Messrs. Naasmyth, Gaskell, and Co.'s wall side drilling machine.
31. ———   double pillar drill.
32. ———   small foot drill and hand drill.
33. Mr. F. Lewis's upright drilling and boring machine.
33 (A). Ditto, ditto.
34. Messrs. Naasmyth, Gaskell, and Co.'s key grooving machine.
35. Messrs. Sharp and Roberts' slotting machine.
36. Messrs. Naasmyth, Gaskell, and Co.'s machine for cutting key grooves in wheels.
37. ———   for cutting slots in cranks.
37 (A). Mr. F. Lewis's slotting and paring machine.
37. Fox's screw cutting machine.
38 (A). Messrs. Naasmyth, Gaskell, and Co.'s large screw cutting machine.
38 (B). Hicks's bolt screwing machine.
29. Messrs. Naasmyth, Gaskell, and Co.'s self acting nut cutting machine.
40. Mr. F. Lewis's machine for cutting the teeth of small metal wheels.
40 (A). ———   large metal wheels.
41. Messrs. Naasmyth, Gaskell, and Co.'s machine for cutting teeth of wooden models.
41 (A). M. Clavet's machine for cutting teeth of wooden and iron models
42. Messrs. Naasmyth, Gaskell, and Co.'s vertical boring machine.
43. ———   large ditto.
44. Hicks's boring machine.
45. N. Nicholas Forg's planing machine.
46. Messrs. Naasmyth, Gaskell, and Co.'s millwrights' planing machine.
47. Ditto, ditto.
47 (A). Hicks's planing machine.
47 (B). Ditto, ditto.
48. Messrs. Naasmyth, Gaskell, and Co.'s plate cutting and punching machine.
49. Messrs. Fairbairn and Co.'s plate bending, also Messrs. N. G. and Co.'s plate cutting, machines.
50. ———   punching machine; also Hicks's expanding ring.
51. Messrs. Naisalay and Field's punehing machine.
52. Ditto, ditto.
53 (A). M. Cavé's punching machine.
53. Messrs. Fairbarn and Co.'s riveting machine.
54. Messrs. Naasmyth, Gaskell, and Co.'s double face grinding machine.

With several Vignettes, making upwards of 70 Plates.

73.

In 8vo., Price 7s.

DE L'INFLUENCE DES CHEMINS DE FER, ET DE L'ART DE LES TRACER ET DE LES CONSTRUIRE.

Par SEGUIN AINÉ. *Paris.*

74.

In 24mo., extra cloth boards and lettered, *for the pocket,* Price 1s.

PRACTICAL RULES FOR THE MANAGEMENT OF A LOCOMOTIVE ENGINE;

In the Station, on the Road, and in cases of Accident.

By CHARLES HUTTON GREGORY, Civil Engineer.

75.

In 8vo., Vol. 1. Parts I. and II., and Vol. 2. Part I., with Plates, Price £1. 11s. 6d., in boards.

A NEW SYSTEM OF CHEMICAL PHILOSOPHY.

By JOHN DALTON, D.C.L., F.R.S., &c., &c.

76.

Text in Royal 8vo., and Plates in Atlas folio, Price 15s.

PRACTICAL EXAMPLES OF MODERN TOOLS AND OTHER MACHINERY.

Being a Supplementary Volume to Mr. RENNIE's Edition of BUCHANAN ' On Mill Work and other Machinery,' by TREDGOLD.

The Work consists of 20 Plates elaborately drawn and engraved, and are the works of Messrs. Maclea and Marsh, Leeds; Messrs. Whitworth and Co., Manchester; &c.

LIST OF PLATES.

1. Large slide lathe—side elevation.
2. Gantry, saddle, compound rest, and face plates for large lathe—details.
3. Screwing machine—plan.
4. Screwing machine—side elevation.
5. Machine to cut nuts—plan and details.
6. Machine to cut nuts—side and end elevation.
7. Fluting machine—plan and side elevation.
8. Fluting machine—end elevation and details.
9. Planing machine, to plane both ways—end elevation.
10. Planing machine, to plane both ways—side elevation.
11. Small fluting machine and lathe—side elevation.
12. Small fluting machine—plan and details.
13. Screwing machine—end elevation and details.
14. 15. Front and side views of Messrs. Whitworth and Co., of Manchester, improved planing machine, with double cutting tools, &c., for large work.
16, 17, 18, 19, 20. Several new machines of Messrs. Whitworth and Co., of Manchester, Mr. Lewis, &c.

77.

In folio size, an effective Print for framing, Price 3s. 6d.

THE IRON BRIDGE OVER THE RIVER TRENT, NEAR SAWLEY,

On the Line of the Midland Counties Railway.

Designed by CHARLES VIGNOLES, Esq., C.E., and drawn on stone by G. HAWKINS, Jun., from a drawing made by Mr. CHARLES LEWSEY, of the Butterley Company.

Cast and erected in the year 1839 by the Butterley Company, and published by their permission.

78.

Large folio size, Price 4s. 6d.

TELFORD'S CAST IRON BRIDGE, CALLED THE GALTON BRIDGE,

Erected over the new Line of the Birmingham Canal at Smethwick, in the county of Stafford.

Drawn by R. BRIDGENS.

Cast and erected by the Horsley Iron Works Company.

79.

8vo. with 19 Plates, in boards, Price 9s.

AN HISTORICAL AND SCIENTIFIC DESCRIPTION OF THE MODE OF SUPPLYING LONDON WITH WATER;

And a particular Account of the different Companies so engaged, with an Exposition of the Attempts to adopt other Modes; together with an Account of the Contrivances for supplying Cities in different Ages and Countries.

By the late WILLIAM MATTHEWS.

80.

In demy 8vo., numerous Wood-cuts, extra cloth bds., Price 8s.

AN ESSAY ON THE BOILERS OF STEAM ENGINES:

Their Calculation, Construction, and Management, with a view to the SAVING OF FUEL. Including Observations on Railway and other Locomotive Engines, Steam Navigation, Smoke Burning, Incrustations, Explosions, &c., &c. A New Edition, considerably enlarged and improved.

By R. ARMSTRONG, Civil Engineer.

81.

In 1 handsomely printed 4to. Vol., with very numerous Plates and Wood-cuts explanatory of the whole system of Gas Manufacture, in extra cloth boards, Price £1. 8s.

A PRACTICAL TREATISE ON THE MANUFACTURE AND DISTRIBUTION OF COAL GAS;

Containing the Description of the Chemical Changes which take place during the destructive distillation of Coal; Working Drawings and Experiments upon different kinds of Retorts, in which the best methods of treating the Coal are considered, with a view to make them practically useful to the Gas Engineer; Working Drawings and Explanations of Retort Houses, Chimneys, &c., calculated for the reception of any number of Retorts; Estimates and Examples.

Working Drawings and Explanations of the different Apparatus used in the Manufacture of Gas; amongst which are the Condensers, Dry and Wet Lime Purifiers, Wash Vessel, Hydraulic Valves, Station Meter, Gas-holders, Governor, and their Details.

Also, Rules and Formulæ for the calculation of the discharges of Gas from mains of different diameters and lengths, and under different pressures, with Tables of Reference.

Concluding with Remarks upon the Secondary Products, as Coke, Tar, Ammoniacal Liquor, &c., and the Manufacture of the Carbonate and Muriate of Ammonia.

By SAMUEL CLEGG, Jun., C.E.

82.

22 Plates, large folio, bound, Price £1. 1s.

THE HARBOUR AND PORT OF LONDON,

SCIENTIFICALLY, COMMERCIALLY, AND HISTORICALLY DESCRIBED;

Containing Accounts of the History, Privileges, Functions, and Government thereof; of its Extent, Divisions, and Jurisdictions, Municipal and Commercial; of its Docks, Piers, Quays, Embankments, Moorings, and other Engineering Works; Tidal and other Observations, and every other necessary information relative thereto, accompanied by Charts of the Port and its Dependencies, its Shoals and Soundings, surveyed by order of the Port of London Improvement Committee; Plans of Docks, Gates, Piers, Swivel Bridges, Methods of Mooring Vessels, &c.

By JAMES ELMES, Architect, Surveyor of the Port of London.

83.

Size 7 feet 2 inches by 3 feet 8 inches, Price £2. 12s. 6d. in sheets; kept mounted and folded in cases; also varnished, stretched, and framed in Maple and Rose-wood.

GREAT WESTERN RAILWAY.

The Splendid Map (made in 8 sheets) of the Line of the Great Western Railway, with the adjacent country, with other Railway communications, compiled and drawn to a large Scale under the direction of J. K. Brunel, Esq., F.R.S., Engineer of the Line.

By Mr. GEORGE ALFRED JERMYN, M.Inst.C.E.

84.

9 fine Plates, Price £1. 5s.

RAILWAY STATIONS.

FRANCIS THOMPSON'S (Architect) Executed Designs, made by express commission for the Directors of the North-Midland Railway, under the directions of ROBERT STEPHENSON, Esq., C.E.

LIST OF SUBJECTS.

Derby Station.
Wakefield Station.
Masboro' Station.
Belper Station.
Elkington Station.

Chesterfield Station.
Clay Cross Station.
Wingfield Station.
Swinton Station.

85.

Vol. 4, with 30 Plates and numerous Wood-cuts, in extra cloth boards, Price £1. 8s.

PAPERS ON SUBJECTS CONNECTED WITH THE DUTIES OF THE CORPS OF ROYAL ENGINEERS.

CONTENTS.

⁎⁎ I have printed several *over copies* of the Memoir of Captain Drummond, out of respect to his memory, which may be had, gratis, by any friends of the deceased, or any Officers in the Corps of Royal Engineers; also by the Officers of the Bengal, Bombay, and Madras Engineers. J.W.

86.

Vol. 3, with several Plates, Price £1. 1s.

PAPERS ON SUBJECTS CONNECTED WITH THE DUTIES OF THE CORPS OF ROYAL ENGINEERS.

CONTENTS.

Lahn at Nassau. By R. J. NELSON, Lieutenant Royal Engineers.

Detailed Description of some of the Works on the Ridean Canal, and of the alterations and improvements made therein since the opening of the navigation. By Lieutenant DENISON, Royal Engineers.

On the mode of Bending Timber adopted in Prussia. By R. J. NELSON, Lieutenant Royal Engineers.

Description of the Coffer-dam used in the construction of the Piers of the Alexandria Aqueduct, being an abstract of a report addressed by Captain TURNBULL to Lieutenant-Colonel ABERT, and by him submitted to the House of Representatives of the United States.

Description of the one-arch Wooden-Bridge, of 205 feet span, at Parádoin, with an account of the execution of the work and the means employed in throwing it across the river Mahavillaganga, in the island of Ceylon. By Captain OLDERSHAW, Royal Engineers.

Description of a Series of Bridges erected across the river Ottawa, connecting the provinces of Upper and Lower Canada, and especially of a wooden arch of 212 feet span which crossed the main branch of the river. By Lieutenant DENISON, Royal Engineers.

Description of a Barometer that requires no corrections either for Zero or for Temperature. By SAMUEL B. HOWLETT, Esq., Chief Draughtsman, Ordnance.

Notes to aid in correcting the operation of ascertaining the Heights of Mountains by means of Boiling Water; furnished by Major ORD, Royal Engineers.

On the Decomposition of Metallic Iron in Salt Water, and of its Reconstruction in a Mineral form. By Lieut.-Col. REID, Royal Engineers.

Report on the Effect of Climate on Yorkshire Paving, communicated by Colonel FANSHAWE, Royal Engineers.

Report of Paving Stables at Brighton.

Experiments tried at Quebec as to the Properties and adhesive qualities of Cements, by order of Colonel NICOLLS, Commanding Royal Engineer, dated 17th November, 1834.

Proof of an Earthenware Pipe for Lieutenant Denison. By Mr. BRAMAH.

Description of a Drawbridge on the London and Birmingham Railway, at Weedon. By Captain JEBB, Royal Engineers.

Table of the Description and Weight of the Packages of various Articles of Traffic. By Major H. D. JONES, Royal Engineers.

APPENDIX.—Notes on Lintz.

In 8vo., with Engravings and Wood-cuts, cloth bds. extra, Price 12s.

87.

OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY,

For the Formation of Topographical Plans; and Instructions for Filling in the Interior Detail, both by Measurement and Sketching; Military Reconnaissance, Levelling, &c., &c.;

With the Explanation and Solution of some of the most useful Problems in Geodesy and Practical Astronomy; to which are added, a few Formulæ and Tables of general utility for facilitating their calculation.

By Captain FROME, ROYAL ENGINEERS, F.R.A.S., & A.I.C.E.

In 1 large and thick royal 8vo. Vol., with several Plates, extra cloth boards, Price £1. 10s.

88.

PAPERS ON IRON AND STEEL,

Practical and Experimental, with copious illustrative Notes.

By DAVID MUSHET, Esq.,

Honorary Member of the Geological and the Quebec Literary and Historical Societies; of the Institution of Civil Engineers of London; Corresponding Member of the Wernerian Natural History Society, Edinburgh.

In 4to., with 12 large folding Plates, extra cloth boards, Price 14s.

89.

A PRACTICAL AND THEORETICAL ESSAY ON OBLIQUE BRIDGES.

By GEORGE WATSON BUCK, M.Inst.C.E.

90.

153 Plates, engraved in the best style of Art, half-bound in morocco, very neat, Price £4. 4s.

PUBLIC WORKS OF GREAT BRITAIN;

CONSISTING OF

Railways, Rails, Chairs, Blocks, Cuttings, Embankments, Tunnels, Oblique Arches, Viaducts, Bridges, Stations, Locomotive Engines, &c.; Cast-Iron Bridges, Iron and Gas Works, Canals, Lock-gates, Centering, Masonry and Brickwork for Canal Tunnels; Canal Boats; the London and Liverpool Docks, Plans and Dimensions, Dock-gates, Walls, Quays, and their Masonry; Mooring-chains, Plan of the Harbour and Port of London, and other important Engineering Works, with Descriptions and Specifications; the whole rendered of the utmost utility to the Civil Engineer and to the Student, and as Examples to the Foreign Engineer.

Edited by F. W. SIMMS, C.E.

This Work is on an Imperial folio size, the Drawings and Engravings have been executed by eminent Artists, and no expense has been spared in rendering it highly essential for practical use; also, as an ornamental Volume of important Engineering Works in several Parts of the Kingdom.   There are some Plates in the Volume that may be preferred in Colours, viz., the elaborate subject of the Blisworth Cuttings, on the Birmingham Line, 18 Plates, geologically coloured; Glasgow and Gairnkirk Railway Cutting through Moss, geologically coloured, &c.; making 20 Plates, carefully coloured, and for which an additional £1. 1s. is charged.

The following is a list of the Authors whose works are comprised in the volume.

Brindley	Hartley	M'Adam	Telford
Brunel	Hosking	Palmer	Thomas
Buck	Jessop	Rennie	Tierney Clark
G. and R. Stephenson	Landmann	Rhodes	Walker.

91.

In Imperial 8vo.   Second Edition, with Additions.   11 Plates, extra cloth boards, Price 8s.

A PRACTICAL TREATISE ON THE CONSTRUCTION OF OBLIQUE ARCHES.

By JAMES HART, Mason.

92.

Just ready, a Second, and much enlarged Edition, in royal 8vo. bds., with 11 Charts and a Meteorological Table, Price £1. 4s.

AN ATTEMPT TO DEVELOPE THE LAW OF STORMS,

By means of Facts arranged according to Place and Time; and hence to point out a Cause for the VARIABLE WINDS, with the view to PRACTICAL USE in NAVIGATION.

By Lieut.-Colonel W. REID, C.B. and R., and Lieut.-Governor of the Bermudas.

Some copies with the Charts in a separate Atlas form, Price £1. 8s.

93.

Royal 8vo., Price 7s. 6d.

AN ESSAY ON THE MODERN SYSTEM OF FORTIFICATION

Adopted on the Rhine and Danube, and followed in all the works constructed since the Peace of 1815, in Germany.   Illustrated by a copious Memoir on the Fortress of Coblentz, and accompanied by beautiful Plans and Sections of the works of that place.

By Lieutenant-Colonel J. H. HUMFREY, K.S.F.,

Formerly of the Royal Artillery and Royal Staff Corps, and late Commanding Engineer to the Corps of Cantabria, Author of several Military Works, &c.   Long resident in Germany, where he had opportunities of collecting information from the best sources.

94.

In the Press, a new and much improved Edition of the

TRANSACTIONS OF THE INSTITUTION OF CIVIL ENGINEERS.

Vol. 1, Price 30s., extra cloth bds., containing a Portrait of the late President, Thos. Telford, Esq., with 27 finely engraved Plates, and numerous vignette embellishments of Portraits of Engineers and their Works.

LIST OF SUBJECTS.

Introduction, with illustrations.

An Account of the Harbour and Docks at Kingston-upon-Hull. By Mr. Timperley, Resident Engineer to the Hull Dock Company. Communicated by the President, James Walker, Esq., F.R.S., L. & E.

On the Locks commonly used for River and Canal Navigation. By W. A. Provis, Esq., M.Inst. C.E.

Improved Canal Lock. By J. Field, Esq., F.R.S., V.P. Inst.C.E.

On the strain to which Lock Gates are subjected. By Peter W. Barlow, Esq., C.E.

On the Hot Air Blast. By J. B. Neilson, Esq., Cor. M.Inst.C.E. Communicated in a Letter to the late President, Thomas Telford, Esq.

On the Relation between the Temperature and Elastic Force of Steam, when confined in a Boiler containing Water. By John Farey, Esq., M.Inst.C.E.

On Ventilating and Lighting Tunnels, particularly in reference to the one on the Leeds and Selby Railway. By J. Walker, Esq. F.R.S., L. & E., Pres. Inst.C.E.

Particulars of the Construction of the Lary Bridge, near Plymouth. By J. M. Rendel, Esq., Cor. M.Inst.C.E.

An Abstract Account of Coals used in Coke Ovens and Retorts, and Coke produced from One Year's Work at the Ipswich Gas Works. Communicated by William Cubitt, Esq. F.R.S., &c., V.P. Inst.C.E.

An Approximative Rule for calculating the Velocity with which a Steam Vessel will be impelled through still Water, by the Exertion of a given amount of Mechanical Power, or forcible Motion, by Marine Steam Engines. Communicated by John Farey, Esq., M.Inst.C.E.

On the Effective Power of the High Pressure Expansive Condensing Steam Engines commonly in use in Cornish Mines. By T. Wicksteed, Esq., C.E. Communicated in a Letter to the President.

Description of the Plan of restoring the Archstones of Blackfriars' Bridge. By Mr. James Cooper, A.Inst.C.E. Communicated in a Letter to the Secretary.

On the Force excited by Hydraulic Pressure in a Branah Press; the resisting Power of the Cylinder, and Rules for computing the Thickness of Metal for Presses of various Powers and Dimensions. By Peter Barlow, Esq., F.R.S., &c., of the Royal Military Academy.

An Account of some Experiments on the Expansion of Water by Heat. By the late T. Tredgold, Esq., M.Inst.C.E.

On procuring supplies of Water for Cities and Towns, by boring. Communicated by John Seaward, Esq., M.Inst.C.E.

Some Account of several Sections through the Plastic Clay Formation in the vicinity of London. By William Gravatt, Esq., F.R.S., M.Inst. C.E.

Some Accounts of Borings for Water in London and its vicinity. By John Donkin, Esq., M.Inst.C.E.

Description of the Method of Roofing in use in the Southern Concan, in the East Indies. By Lieut. Fras. Outram, Bombay Engineers. Communicated in a Letter to the late President, T. Telford, Esq., by Major-Gen. Sir John Malcolm, G.C.B., &c., Governor of Bombay.

Experiments of the Resistance of Barges moving on Canals. By Henry R. Palmer, Esq., V.P. Inst.C.E. Addressed to the late President, T. Telford, Esq.

An Elementary Illustration of the Principles of Tension and of the Resistance of Bodies to being torn asunder in the Direction of their length. By the late T. Tredgold, Esq., M.Inst.C.E.

Details of the Construction of a Stone Bridge erected over the Dora Riparia, near Turin. By Chevalier Mosca, Engineer and Architect to the King of Sardinia, &c., &c. Drawn up and communicated by B. Albano, Esq., A.Inst.C.E.

Memoir on the use of Cast Iron in Piling, particularly at Brunswick Wharf, Blackwall. By Mr. Michael A. Borthwick, A.Inst.C.E.

An Account of the new or Grosvenor Bridge over the River Dee at Chester.

An Account of some Experiments made in 1823 and 1824, for determining the Quantity of Water flowing through different shaped Orifices. By Bryan Donkin, Esq. F.R.A.S., V.P. Inst.C.E.

On the Changes of Temperature consequent on any Change in the Density of Elastic Fluids, considered especially with reference to Steam. By Thomas Webster, Esq. M.A., of Trinity College, Cambridge. Communicated by James Simpson, Esq., M.Inst.C.E.

A Method of representing by Diagram and Estimating the Earthwork in Excavations and Embankments. By Mr. John James Waterston, A.Inst.C.E.

Remarks on Ilfern Granite. By Frederick C. Lukis, Esq., of Guernsey, in reply to enquiries from the President; with some experiments

made by the latter on the wear of different granites. Communicated by the President.

Experiments on the Force required to fracture and crush Stones; made under the direction of Messrs. Bramah and Sons, for B. Wyatt,

Esq., Architect. Communicated by William Freeman, Esq., A.Inst.C.E.

New Canal Boat Experiments. By John Macneill, Esq., M.Inst.C.E., F.R.A.S., M.R.I.A.

95.

Vol. 2, Price 28s., extra cloth bds., containing 23 finely engraved Plates.

TRANSACTIONS OF THE INSTITUTION OF CIVIL ENGINEERS.

LIST OF SUBJECTS.

96.

Handsomely engraved on Steel, (size 16 inches by 10¼ inches), Price 2s. 6d.

A CHART OF THE HARBOUR AND PORT OF LONDON,

Exhibiting the River Thames, and the adjacent Docks from London Bridge to Bugsby's Hole, and including the Greenwich Railway, the Commercial Railway, and the commencement of the Croydon Railway.

In this Chart the Low-water Mark, Soundings, Shoals, and other important features, are inserted from the most recent surveys; and, from the care which has been exercised in indicating correctly the various Wharfs, Dock-yards, Warehouses, and Factories, on each side of the River, it will be found of great utility to all persons engaged in nautical or commercial pursuits.

97.

PUBLIC WORKS OF THE UNITED STATES OF AMERICA.

In 2 Parts, Imperial folio, very neatly put together in a portfolio, comprising the following very important Works:—

CONTENTS OF PLATES.

1 to 13. Philadelphia Gas-works; comprising elevations of building, roof, details, furnaces, retorts, sections of; gasometers, tanks, and details; hydraulic main pipes, &c., &c.; gas meters, washers, &c., &c., &c.

14. Elevation, section, and plan of the Reservoir Dam across Swatara, Pennsylvania, erected by the Union Canal Company.

15. Elevation, section, chamber, and plan of the Outlet Locks on the Schuylkill Canal at Plymouth, Pennsylvania.

16. Lock Gates and details of ditto.

17. Triangulation of the entrance into the Bay of Delaware, exhibiting the exact position of the capes and shoals, with reference to the site of the breakwater.

18. Map of the Delaware Breakwater, with the detailed topography of Cape Henlopen, with section of Breakwater.

19. Map of the Philadelphia Water-works.

20. Ground plan of the northern half of the Philadelphia Water-works.

21. Dam, end view of water-wheel, &c.

22. Dam, sections of; pier, &c.

23. Top view, side view, section, &c., of force pumps.

24. Improved stop cock, reducing pipe, circular pipe, double and single branch pipe, bevel hub pipe, &c.

25. Plan of a dam, Sandy and Beaver Canal; plan of abutment, cross section, gravelling, &c.

26 and 27. Plan, elevation, and cross section of a lift lock, Sandy and Beaver Canal.

28. Gate, front view; front view of falling gate, mitre sill, section, &c.

29, 30. Eastern division, and Sandy and Beaver Canal, Ohio, front view; foundation plan, end view, &c., of abutment.

31, 32. Plan of the Tye River Dam across James River, James River and Kanawha Canal.

33. Lock; plan of eight feet lift for the James River and Kanawha Canal; plan and sections.

34, 35. Plan of a wooden lock of eight feet lift, James River and Kanawha Canal; several sections.

36, 37. Plan of Rivanna Aqueduct; elevations, sections, transverse section, horizontal section at surface of water, plan of pier abutment and wing-walls, &c.

38. Farm Bridge, James River and Kanawha Canal; elevation, plan, longitudinal and cross section.

39, 40. Aqueduct over Byrd Creek, James River and Kanawha Canal; elevation, abutment of wings, horizontal section at surface of water, transverse section, &c.

Edited by WILLIAM STRICKLAND, Architect and C.E.
EDWARD H. GILL, C.E.
HENRY R. CAMPBELL, C.E.

The Plates are engraved in the best style of art by the LE KEUXS from elaborate drawings made expressly for the work. Care has been taken that each subject contains every dimension necessary to show proportion and parts of construction.

Price £2; and in an 8vo. Vol., Price 6s., or together £2. 6s.

REPORTS, SPECIFICATIONS, AND ESTIMATES OF PUBLIC WORKS OF THE UNITED STATES OF AMERICA.

Explanatory of the Atlas folio of detailed Engravings, elucidating practically these important Engineering works.

98.

Just published, in 8vo., bound, Price 3s. 6d.

THE PRACTICE OF MAKING AND REPAIRING ROADS;

OF CONSTRUCTING FOOTPATHS, FENCING, AND DRAINS;

Also a Method of comparing Roads with reference to the Power of Draught required; with Practical Observations, intended to simplify the mode of Estimating Earth-work in Cuttings and Embankments.

By THOMAS HUGHES, Esq., Civil Engineer.

99.

The New Work on Bridge Building.

Vol. 1, royal octavo, in 2 divisions, Price £1. 16s., containing 380 pages of Text and 55 elaborately engraved Plates, with every detail and dimension for practical use, entitled,

THEORY, PRACTICE, AND ARCHITECTURE OF BRIDGES.

The THEORY and PAPERS by JAMES HANN, of King's College; PROFESSOR MOSELEY, M.A., King's College; ROBERT STEVENSON, C.E., Edinburgh; and T. HUGHES, C.E.

Vol. 2 will consist of a PRACTICAL ENGINEERING and ARCHITECTURAL TREATISE on BRIDGE BUILDING, by WILLIAM HOSKING, F.S.A.,

Architect and Civil Engineer, with 55 Plates, elaborately engraved.

The Work will be completed in 2 Vols., to contain 700 pages of Text, and illustrated by 110 Engravings of examples of Stone, Timber, Iron, Wire, and Suspension Bridges, from Drawings furnished by the principal Engineers of Great Britain and France.

Vol. 2 is preparing, and is to be published in 6 Parts, at intervals, in the course of the year. Parts 7 and 8, or 1 and 2 of Vol. 2, are already out, Price 6s. each.

*** This Work, when completed, will be found to be of a most valuable character, the highest talent having been engaged for the Engravings.

Atlas copies of the Plates may be had at Christmas next.

100.

In 8vo, with several Plates, Price 16s.

A TREATISE ON THE STRENGTH OF TIMBER, CAST IRON, MALLEABLE IRON, AND OTHER MATERIALS,

With Rules for Application in Architecture, Construction of Suspension Bridges, Railways, &c.; with an Appendix on the Powers of Locomotive Engines on Horizontal Planes and Gradients.

By PETER BARLOW, F.R.S., &c., &c.

101.

In 8vo, upwards of 500 pages, Price 8s.

AN ELEMENTARY INVESTIGATION OF THE THEORY OF NUMBERS,

With its Application to the Indeterminate and Diophantine Analysis, the Analytical and Geometrical Division of the Circle, and several other curious Algebraical and Arithmetical Problems.

By PETER BARLOW, Esq., F.R.S., M.Inst.C.E., and of several other Learned Societies and Academies.

102.

Second Edition, with Examples, Price 3s. 6d.

A SET OF PROJECTING AND PARALLEL RULERS,

For constructing Working Plans and Drawings in Isometrical and other Modes of Projection.

Invented by T. SOPWITH, Esq.

103.

8vo. volume, with a folding Plate, Price 5s.

ON THE SAFETY LAMP,

For Preventing Explosions in Mines, Houses Lighted by Gas, Spirit Warehouses, or Magazines in Ships, &c.; with Researches on Flame.

By SIR HUMPHREY DAVY, Bart.

In 8vo, extra cloth boards, with Plates, a Second Edition, with considerable Additions, Price 18s.

104.

A PRACTICAL TREATISE ON LOCOMOTIVE ENGINES UPON RAILWAYS;

The construction, the mode of acting, and the effect of Engines in conveying heavy loads; the means of ascertaining, on a general inspection of the Machine, the velocity with which it will draw a given load, and the results it will produce under various circumstances and in different localities; the proportions which ought to be adopted in the construction of an Engine, to make it answer any intended purpose; the quantity of fuel and water required, &c.; with Practical Tables, showing at once the results of the Formulæ: FOUNDED UPON A GREAT MANY NEW EXPERIMENTS made on a large scale, in a daily practice on the Liverpool and Manchester, and other Railways, with different Engines and Trains of Carriages.   To which is added an APPENDIX, showing the expense of conveying Goods by means of Locomotives on Railroads.

By COMTE F. M. G. DE PAMBOUR.

In demy 8vo, extra cloth boards, Price 12s.

105.

THE THEORY OF THE STEAM ENGINE;

Showing the Inaccuracy of the Methods in use for calculating the Effects or the Proportions of Steam Engines, and supplying a Series of Practical Formulæ to determine the Velocity of any Engine with a given Load, the Load for a stated Velocity, the Evaporation for desired Effects, the Horse-power, the useful Effect for a given Consumption of Water or Fuel, the Load, Expansion, and Counter-weight fit for the Production of the Maximum useful Effect, &c.   With an APPENDIX, containing concise Rules for persons not familiar with Algebraic Signs, and intended to render the use of the Formulæ contained in the work perfectly clear and easy.

By COMTE F. M. G. DE PAMBOUR.

At Christmas will be published a New and Extended Edition, with Plates, 8vo.

106.

A PRACTICAL TREATISE ON THE PRINCIPLES AND PRACTICE OF THE ART OF LEVELLING,

With Practical Elucidations and Illustrations, and Rules for Making Roads upon the principle of TELFORD; together with Mr. MACNEILL's Instrument for the Estimating of Roads, &c.

A work most essential to the Student.

107.

Wood-cuts, 8vo., Price 5s.

SECOND REPORT ON THE LONDON AND BIRMINGHAM RAILWAY,

Founded on an Inspection of, and Experiments made on, the Liverpool and Manchester Railway.

By PETER BARLOW, Esq., F.R.S., &c., &c.

108.

Third Edition.   Folio, with a large Atlas of Plates, Price £4. 4s.

NAVAL ARCHITECTURE;

Or, the RUDIMENTS and RULES of SHIP BUILDING: exemplified in a SERIES of DRAUGHTS and PLANS; with Observations tending to the further Improvement of that important Art.   Dedicated, by permission, to His late Majesty.

By MARMADUKE STALKARTT, Naval Architect.

COLONEL PASLEY'S WORKS.

109.

In 8vo., a Re-issue of the last edition, Price 8s.

ESSAY ON THE MILITARY POLICY AND INSTITUTIONS OF THE BRITISH EMPIRE.

110.

Second Edition, demy 8vo., much enlarged, Price 16s. cloth boards, (instead of £1. 4s.),

A COMPLETE COURSE OF PRACTICAL GEOMETRY AND PLAN DRAWING;

Treated on a Principle of peculiar Perspicuity. Adapted either for Classes, or for Self-Instruction. Originally published as the first volume of a Course of Military Instruction.

111.

2 vols. 8vo., with Plates and numerous Wood-cuts.

COURSE OF ELEMENTARY FORTIFICATION.

112.

In 8vo., re-issued, at 5s. in boards.

Observations on the Expediency and Practicability of Simplifying and Improving

THE MEASURES, WEIGHTS, AND MONEY

USED IN THIS COUNTRY,

Without materially altering the present Standard.

113.

Preparing, a New Edition, in demy 8vo., extra cloth boards, numerous Wood-cuts.

OBSERVATIONS ON LIMES, CALCAREOUS CEMENTS, MORTARS, STUCCOS, AND CONCRETE,

AND ON PUZZOLANAS, NATURAL AND ARTIFICIAL; TOGETHER WITH RULES DEDUCED FROM NUMEROUS EXPERIMENTS FOR MAKING AN ARTIFICIAL WATER CEMENT,

Equal in Efficiency to the best Natural Cements of England, improperly termed Roman Cements; and an Abstract of the Opinions of former Authors on the same Subjects.

114.

Part I., with several wood-cuts, Price 5s.

RULES, CHIEFLY DEDUCED FROM EXPERIMENT, FOR CONDUCTING THE PRACTICAL OPERATIONS OF A SIEGE.

Originally composed for the Use of the ROYAL ENGINEER ESTABLISHMENT at Chatham.

115.

In one vol. 8vo.

SEVERAL TRACTS ON THE ART OF BUILDING OF ALL KINDS,

Drawn up and printed with numerous Wood-cuts, as Elementary Principles, besides that of Practice, for the Royal Engineers.

*** Making together, when collected, 8 vols. of very valuable elementary and practical works.

116.

RAILWAYS.

In Imperial folio, 83 Engravings, with explanatory Text, containing the Specification of the Works as executed.

Edited by F. W. SIMMS, C.E.

Price £2. 12s. 6d. in half-morocco.—Subjects:

The London and Birmingham Railway—The Great Western Railway—The South-ampton Railway—The Greenwich Railway—The Croydon Railway—The Birmingham and Bristol Thames Junction Railway—Glasgow and Gairnkirk Railway. In 83 Plates, with Sections, Details, &c.

LONDON AND BIRMINGHAM RAILWAY.

1. Frontispiece—London Entrance to the Primrose Hill Tunnel.
2. Title-page, vignette—Railway Station at Watford.
3. Chimneys at Camden Town End Engine Station.
4. Entrance to Railway Station at Euston Grove—Vignette, page 1.
5. Euston Grove Station, ground plan.
6. Camden Town fixed Engine Station, ground plan.
7. Iron Roof—Euston Grove Station.
8. Stanhope Place and Park Street Bridges.
9. Bridge over the Regent's Canal.
10. Details of ditto.
11. London and Birmingham Railway—Harrow in the distance. Vignette, page 17.
12. London and Birmingham Railway—Watford Tunnel. Vignette, page 26.
13. Road Bridge over Railway.
14. Colne Viaduct.
15. Bridge over Excavation south of Watford Tunnel.
16. Box Moor Oblique Bridge.
17. North Church and Primrose Hill Tunnels—Cross Section.
18. Entrances to ditto—Vignettes, pages 31 and 54.
19. to 29. Working Section, Blisworth Excavations and Embankments.
30, 31. Undercutting of Rock in Blisworth Cuttings—Enlarged Scale.
32, 33. Plan and Elevation of Retaining Walls, Counterforts, Inverts, Drains, &c., in the Blisworth Cuttings.
34, 35. General Plan and Section of the Undercutting of the Rock in the Blisworth Cuttings.
36, 37. Plan, Elevation, and Section of the West End of the Blisworth Cuttings.
38 to 47. Plan, Elevations, and Details of the Kilsby Tunnel, Warwickshire.
48. Method of fixing the Fifty-pound Rails in the Chairs.
49. Method of fixing the Sixty-five-pound Rails in the Chairs.
50. Mr. Bœck's Railway Chairs.
51. Plan of Siding or Passing Place.
52. Plans and Sections of a Twelve-feet Turn Rail.
53. Plan and Elevation of First Class Carriage.

GREAT WESTERN RAILWAY.

54. Plan and Elevation of the Brent Viaduct.

55. Sections of the Brent Viaduct.
56. Transverse Sections of the Brent Viaduct.
57. Plan and Elevation of Maidenhead Bridge.
58. Sections of Maidenhead Bridge.
59. Occupation Bridge over the Railway.

SOUTHAMPTON RAILWAY.

60. Bridge under Railway.
61. Plan of ditto.
62. Occupation Bridge in Embankment.
63. Occupation Bridge.
64. Elevation and Details of Earth-work and Timber Waggons.

GREENWICH RAILWAY.

65. Oblique Arch over Neckinger Road.
66. Sections of ditto.
67. Oblique Arch over Spa Road.
68, 69. Sections of ditto.
70. Viaduct of the Greenwich Railway.

CROYDON RAILWAY.

71. New Cross Bridge over Railway.
72. Method of fixing the Permanent Way.

BIRMINGHAM AND BRISTOL THAMES JUNCTION RAILWAY.

73. Cast-iron Arch Suspension Bridge over the Paddington Canal and the Railway.
74. Railway Gallery under the Canal, &c.

GLASGOW AND GAIRNKIRK RAILWAY.

75. Transverse Section at Robroyston Moss.

MISCELLANEOUS.

76. Comparison of the Transverse Section of numerous Railway Bars.
77. Comet Locomotive Engine.
78. Mr. Stephenson's Patent Locomotive Engine.
79. Railway Waggons.
80. Flat Rail with Flange.
81. Rail by Losh, Wilson, and Bell.
82. Hettou Rail.
83. Sidings or Passing Places.

117.

In 12mo., Price 2s. 6d. in boards.

RULES AND DATA FOR THE STEAM ENGINE,

BOTH STATIONARY AND LOCOMOTIVE;

And for RAILWAYS, CANALS, and TURNPIKE ROADS: being a Synopsis of a Course of Eight Lectures on MECHANICAL PHILOSOPHY; illustrative of the most recent modes of Construction, and an Exposition of the Errors to which Patentees and others are liable, from their not being acquainted with the practical departments of Engineering.

By HENRY ADCOCK, Civil Engineer.

118.

4to., with Plates, Price 15s.

A TREATISE ON RIVERS AND TORRENTS,

With the METHOD of REGULATING their COURSE and CHANNELS. By PAUL FRISI, Member of numerous Academies. To which is added an ESSAY on NAVIGABLE CANALS, by the same.

Translated by Major-General JOHN GARSTIN.

119.

New Edition, 8vo., with 35 Copper-plate Engravings, Price 16s.

A TREATISE ON ISOMETRICAL DRAWING,

As Applicable to Geological and Mining Plans, Picturesque Delineations of Ornamental Grounds, Perspective Views and Working Plans of Buildings and Machinery, and to General Purposes of Civil Engineering; with Details of Improved Methods of preserving Plans and Records of Subterranean Operations in Mining Districts.

By T. SOPWITH, Esq., M.I.C.E.

120.

Three vols. large 4to., numerous fine Plates, Price £3. 3s.

HISTORY OF MARINE ARCHITECTURE.

By JAMES CHARNOCK, F.S.A.

Illustrative of the Naval Architecture of all Nations from the earliest period, particularly British.

*** Charnock is a work essential to all who study the construction of ships, large and small craft, whether for war, packet, or mercantile purposes.

121.

Large Atlas folio, 17 very finely engraved Plates, Price £4. 14s. 6d.—A few copies only of proofs on India paper, Price £6. 6s.

SUSPENSION BRIDGES.

A SCIENTIFIC and an HISTORICAL and DESCRIPTIVE ACCOUNT of the SUSPENSION BRIDGE constructed over the MENAI STRAIT, in North Wales; with a brief Notice of CONWAY BRIDGE. From Designs by and under the direction of THOMAS TELFORD, Esq., F.R.S., L. and E., &c., &c., and ALEXANDER PROVIS, Esq., Resident Engineer.

122.

In 8vo., with two large folding Plates of Sections of Roads, Price 2s.

MAKING AND REPAIRING ROADS.

RULES for MAKING and REPAIRING ROADS, as laid down by the late THOMAS TELFORD, Esq., Civil Engineer. Extracted, with additions, from a Treatise on the Principles and Practice of Levelling.

By F. W. SIMMS, Surveyor and Civil Engineer.

123.

Plan and Elevation on a scale of 10 feet to 1 inch, Price 10s. On India Paper, Price 15s.

STAINES BRIDGE:

A fine Engraving by J. H. LE KEUX, under the direction of B. ALBANO, Esq., C.E., from his Drawing presented to the Institution of Civil Engineers, and made from the Original Drawings and Admeasurement, with permission of GEORGE RENNIE, Esq., F.R.S., the Engineer.

c

124.

Price 7s.

GLADWIN'S FINE ENGRAVING OF THE PATENT SELF-ACTING SLIDE LATHE,

Manufactured by Messrs. J. Whitworth and Co., Manchester.

125.

Price 5s.

GLADWIN'S FINE ENGRAVING OF A DRILLING AND BORING MACHINE.

By Messrs. Whitworth and Co., Manchester.

126.

Columbier size, Price 3s. 6d.

GLADWIN'S ELEVATION OF STEPHENSON'S PATENT LOCOMOTIVE ENGINE.

Printed on hard paper for colouring.

127.

Large folio, Price 7s.

GLADWIN'S SPLENDID ENGRAVING OF STEPHENSON'S PATENT LOCOMOTIVE ENGINE.

*** This is a master-piece of Mechanical Engraving, and may be considered unique in its execution.

128.

Price 7s.

GLADWIN'S SPLENDID ENGRAVING OF THE PATENT SELF-ACTING PLANING MACHINE.

By Messrs. Whitworth and Co., Manchester.

129.

Gilt frames and glazed, very neat, Price 11s. the pair.

PORTRAITS FRAMED AND GLAZED FOR AN OFFICE.

A Pair of Portraits of Geo. Stephenson, Esq., of Newcastle upon Tyne, and Robert Stevenson, Esq., of Edinburgh, Civil Engineers.

130.

Fine large print, Price 5s.

SHEER DRAUGHT OF HER MAJESTY'S STEAM SHIP OF WAR "MEDEA,"

Built by Oliver Lang, Esq. at Woolwich; first commanded by Captain H. Austin in the Mediterranean for nearly four years, and since on the North American station by Captain Nott.

131.

Large folio Plate, Price 5s.

THE "VESTAL" TRINITY YACHT.

Draught, Bottom, plan of Decks, fore and aft Bodies. Built by Messrs. Curling, Young, and Co.
272 Tons.

132.

Price 2s. 6d.

THE "NILE" STEAM EGYPTIAN SHIP.

Transverse Sections, showing its construction. Built by Messrs. Fletcher, Fearnell, and Co.

133.

Price £1. 1s.

THE "MONARCH."

Formerly the Leith and London Steam Packet, now belonging to the General Steam Navigation Company; consisting of 4 large folio Plates of Draught, Bottom, fore and aft Bodies, Longitudinal Section through, showing Interior Fittings, Berths, State and other Rooms, Machine Boilers, and every contrivance for comfort and safety. Upper Decks, Lower Decks, &c., with Dimensions.

134.

In 8vo, with Wood-cuts, Price 1s.

AN ESSAY ON SINGLE VISION.

By JOHN THOMAS WOODHOUSE, M.D., Fellow of Gonville and Caius College, Cambridge.

135.

In 12mo, extra cloth boards, Price 4s. 6d.

POPULAR INSTRUCTIONS ON THE CALCULATION OF PROBABILITIES.

Translated from the French of M. A. QUETELET, with Notes, by RICHARD BEAMISH, Esq., C.E., F.R.S., &c.

SIR CHRISTOPHER WREN'S ARCHITECTURE.

136. Plan of his First Design of St. Paul's, 1s.
137. Elevation and Section of Bow Church, 1s. 6d.
138. Interior of St. Stephen's, Walbrook, 1s.
139. Section of St. James's Church, Piccadilly, 1s.
140. Roof of the Theatre at Oxford, 1s.
141. Plan for the Rebuilding of the City of London, 1s.
142. Elevation, Plan, and Section of the College of Physicians, London, 1s. 6d.
143. Elevation of the Tower and Spire of St. Dunstan's in the East, London—Elevation and Section of Chichester Spire, 1s. 6d.

WESTMINSTER HALL.

144. Section from admeasurement by Mr. George Allan, (Clerk of the Works to Sir Robert Smirke, Architect to the late Renovation). Very neatly engraved by Mr. HAWKSWORTH. Folio size, 2s. 6d.

145.

SECTION OF ST. PAUL'S CATHEDRAL.

The ORIGINAL SPLENDID ENGRAVING by GWYN, of the Section of ST. PAUL'S CATHEDRAL, decorated agreeably to the original intention of Sir Christopher Wren; a very fine large Print, showing distinctly the construction of that magnificent Edifice. Price 10s.
This is a magnificent Plate, the only one of its kind, showing constructively the genius of Sir Christopher Wren.

The following Prints, 8vo. size, are 6d. each; 4to. size, on India paper, 1s. each.

145. Mr. Greenough's Villa. 2. D. Burton.
147. Catholic Chapel. 2. Newman.
148. York Stairs' Water Gate. 1. I. Jones.
149. Somerset House, (Elevations, Interiors, and Views). 6. Chambers.
156. Society of Arts. I. Adam.
151. College of Physicians. 2. Wren.
152. Newgate. 1. Dance.
153. Church of St. Peter le Poor. 1. Gibson.
154. East India House. 1. Jupp.
155. Ashburnham House. 2. I. Jones.
157. Church of St. George. 3. Hawksmoor.
157. Church of All Souls. 1. Nash.
158. Westminster Hall. 2. Nash.
159. Banqueting House. 1. I. Jones.
160. Mansion House. 1. Dance, &c.
161. County Fire Office. 1. Abraham.
162. University Club House. 1. Wilkins and Gandy.
163. Tower of Bow Church. 1. Wren.
164. Westminster Abbey Church. 6. Wren.
165. Hall, Christ's Hospital. 1. Shaw.
166. Carlton Palace. 2. Sir R. Taylor.
167. College of Physicians and Union Club House. 2. Sir R. Smirke.
168. Terraces in the Regent's Park. 2. Nash and D. Burton.
169. Council Office, &c. 1. Soane.
170. Bank of England. 3. Soane.
171. Law Courts, Westminster. 3. Soane.
172. House of Lords, &c. 3. Soane.
173. Colosseum, Regent's Park. 1. D. Burton.
174. Hanover Chapel. 1. Cockerell.
175. Temple Bar. 1. Wren.
176. House of Mr. Nash, &c. 2. Nash.
177. Belgrave and Eaton Squares. 2. Nash.
178. Mr. Kemp's Villa. 2. Kendall.
179. London, Southwark, and Waterloo Bridges. 6. Rennie.
180. Bridge of Blackfriars. 1. Mylne.
181. Bridge of Westminster. 3. Labelye.
182. King's Entrance, House of Lords, Section and Interior Views. 3. Soane.
183. Plan and Interiors of St. Stephen's, Walbrook. 2. Wren.
184. Plan and Interiors of Temple Church. 3. Wren.
185. Plans, Elevation, and Section of Custom House, London. 2. Laing.
186. Plan and Elevation of Uxbridge House. Vardy.
187. Plans, Elevations, Views, and Sections of St. Paul's Cathedral. 8. Wren.
188. Elevations and Sections of St. Martin's Church. Gibbs.
189. Plan, Section, and Elevation of the Queen's Theatre. 2. Nash and Repton.
190. Plan and Elevation of the Diorama. Pugin and Morgan.

191. Plan, Elevation, and Interior View of Haymarket Theatre. Nash.
192. Plan, Side Elevation, and Interior of Westminster Abbey. 9.
193. Plan, Elevation, Section, and Interior of St. Mary Woolnoth. 2. Hawksmoor.
194. Plan, Elevation, and Section of St. Philip's, Regent Street. 2. Repton.
195. Plan and Elevation of Bethlem Hospital. Lewis.
196. Plan and Elevations of Burlington House. Lord Burlington and Colin Campbell.
197. Elevation and Sections of St. Bride's Church. 2. Wren.
198. Interiors of Sir John Soane's House. 2. Soane.
199. Plan, Elevation, and Interior View of St. Paul's, Covent Garden. Inigo Jones.
200. Elevation of the Royal Exchange. 2. Jerman.
201. Plan and Elevation of the Russell Institution.
202. Interior of the Mansion of Thos. Hope, Esq. 2. Hope.
203. Plan, Elevation, and View of the Library of the London Institution. 2. Brooks.
204. Plan, and Transverse and Longitudinal Sections of King Henry 7th's Chapel. 2. Begun 1502.
205. Plan, Elevations, Interiors, and Sections of Covent Garden Theatre. 6. Sir Robert Smirke.
206. Plan and Elevation of Sir John Nash's House. Nash.
207. Plan and Transverse Section of St. James's, Piccadilly. Wren.
208. Interior of Freemasons' Hall. Sandby.
209. Plan, Elevation, and Sections of St. Luke's Church, Chelsea. 2. Savage.
210. Elevation, Section, and Plan of St. Pancras' Church. 3. Inwood.
211. Plan and Elevation of All Saints Church, Poplar. Hollis.
212. Elevation and Section of St. Dunstan's in the East. Wren.
213. Elevation and Section of Bow Church. Wren.
214. Plan and Elevation of St. Marylebone Church. Hardwicke.
215. Plan, Sections, and Interior of the Roman Catholic Chapel, Moorfields. 3. Newman.
216. Plan, and Garden Front of the British Museum (Old). Pouget.
217. Plan and Elevation of the Horse Guards. Kent.
218. Plan and Elevation of the Villa of James Burton, Esq. Burton.
219. View of the East side of Belgrave Square. Basevi.
220. Plan, View, Sections, and Interiors of Drury Lane Theatre. 6. B. Wyatt.
221. View of the Interior of the English Opera House. Beazley.
222. View of the Interior of the Amphitheatre, Westminster Bridge.

223. View of the Five Elliptical Arch Bridge across the Tweed at Kelso. Constructed by the late John Rennie, Esq., Civil Engineer. Large print, 6s.
224. View of the Bending of Blackfriars' Bridge, by R. Mylne. Engraved by the celebrated Piranesi. Large print, 6s. 6d.
225. View of the Progress of the First Arch of New London Bridge, with Centering, 4s. 6d.
226. View of the Menai Suspension Bridge. By W. A. Provis, Esq., C.E., &c. Fine large print, India. 10s.
227. View of the Cast Iron Bridge across the Galton Canal. By R. Bridgens. Large size, 4s. 6d. India proofs, 6s.
228. View of Hammersmith Suspension Bridge. Finely engraved, large size, 5s.
229. Plan and Elevation of Skewsbury Bridge, 1s. 6d.
230. Mr. Britton's Views of the West Fronts of 14 English Cathedrals, folio size, 6s.; aquatinted, 10s. 6d.
231. Mr. Britton's Series of Picturesque Views of the Interior of 11 Cathedrals, with a Border of Architectural and Sculptural Ornament, folio size, 6s.
232. Vardy's Perspective View of the Gothic Hall, Hampton Court, finely engraved, folio, 3s.
233. Mr. Coney's View of the Interior of the Cathedral at Milan, fine large print, 5s.
234. Geometrical Elevation of the West Front of the

Cathedral of St. Paul's, London, before the fire; St. Stephen's, Vienna; Strasburg, Cologne, the Tower of Mechlin, and the Great Pyramid of Egypt, to one scale, folio size, 3s. 6d.
235. Plan of Westminster Hall and the adjacent Law Courts, 1s.
236. View of the West Front of the Propylæa at Athens, folio, 1s. 6d.
237. Map of Attica with part of Bœotia, improved from the observations of recent travellers, particularly by Captain Smith, R.N., 2s. 6d.
238. Portraits of Eminent Architects and Engineers, men who have done honour to Britain. Engraved in the best style by superior artists, folio and 4to. sizes, £1. 1s. the Set:

1. Sir Christopher Wren.
2. James Stuart.
3. Nicholas Revett.
4. Sir William Chambers.
5. James Watt.
6. Humphrey Repton.
7. Thomas Telford.
8. Thomas Tredgold.

239. Transverse Section of the Temple of Jupiter Olympius at Agrigentum, folio size, 1s. 6d.

Geology and Geography.

240.

Price in sheet, coloured, £1. 10s.   Mounted on roller, or in case for the Library, £2. 2s.

A LARGE GEOLOGICAL MAP OF CENTRAL AND WESTERN EUROPE,

INCLUDING THE BRITISH ISLES, FRANCE, GERMANY, AND THE ADJACENT COUNTRIES.

Originally compiled by Dr. H. von Dechen (Professor in the Berlin University), with the addition
of the most recent information respecting the Geology of the BRITISH ISLES and
other Improvements

By W. HUGHES, F.R.G.S.

While "Geology," as is correctly observed by Sir John Herschel, "in the magnitude and sublimity of the objects of which it treats, undoubtedly ranks in the scale of the sciences next to Astronomy," it is also that department of learning which has the most direct and practical bearing upon the pursuits of industry. Agriculture, the art of constructing and repairing Roads, Canals, and Wells, Mining, Building, all depend for their successful pursuit upon a due knowledge in those engaged in such operations, and consequently in all those who are in any way (however remotely) interested in them, of the nature of the soils and rocks which constitute the materials to be employed in them, and of the localities in which those most suited for the required ends occur; and upon such a knowledge depends not only the ultimate success or failure of these undertakings, but also a due appreciation of the difficulties to be encountered in them and the expenses to be thereby incurred in their prosecution. The correct register of geological observations thus becomes of paramount importance, not only to professed geologists, but to all who would be considered as well-informed members of society; and hence the value and interest to all such of *Geological Maps*, which are the most simple and economical registers of geological facts. Geological Maps of such particular countries as have been observed with sufficient accuracy are abundant; but as the interest attaching to any one portion of history is heightened by viewing its connexion with other portions, and comparing the phenomena which they present in common, or noticing the points in which they differ from one another,—so the value of a knowledge of the geology of any one country is enhanced by its being made a portion, a chapter as it were, of the *comparative Geology* of other countries, and more particularly of those countries which are united with it by geographical proximity, or by ties of common interest.

The present Map is based upon the observations of the most eminent British and Foreign Geologists, and includes in a digested form the most recent of their labours. Its size is 35 inches by 26½ inches, dimensions which unite to convenience for reference the practicability of a scale sufficiently large to admit of the insertion of all the more important geological and geographical features of the countries delineated. In order to render it as much as possible an exhibition of the *Physical Geography* as well as the *Geology* of these countries, the names not only of the larger rivers, but also of their tributaries, as well as of smaller streams, have been inserted; and particular attention has been given to the correct indication of the numerous small groups and chains which form parts of the mountain-systems of Britain, France, Germany, Switzerland, and Italy. The elevation attained by the higher summits of each of the principal chains is specified in English feet. Exhibiting thus the geographical as well as geological features of the countries represented, the Map is well calculated to form a useful guide in the consideration of the various lines of Railroad which are either constructed or in progress throughout various parts of them.

The Map is handsomely engraved on steel, and the various geological formations are beautifully coloured in accordance with the system adopted in the most recent works of English geologists of eminence.

241.

A new Edition.   One large sheet, very accurately coloured, Price 15s.

GEOLOGICAL STRUCTURE OF ENGLAND, IRELAND, AND SCOTLAND.

An Index Geological Map of the British Isles; constructed from published documents, communications of eminent Geologists, and personal investigation.

By JOHN PHILLIPS, F.R.S., G.S., Professor of Geology in King's College, London.

Engraved by J. W. Lowry.

Mounted in a case, Price 18s.; on black roller, 22s.; mahogany do., 23s. 6d.

242.

The following MAPS, Engraved on Steel, compiled from the most accurate sources, have just been published.

An entire new MAP OF ENGLAND, WALES, and SCOTLAND, showing all the Railways open and in progress, with the Stations on the Lines, size 52 inches by 40, plain, on 2 sheets	£0	12	0
Ditto, ditto, full coloured in Counties	1	1	0
Ditto, ditto, Geologically coloured	1	7	6
Ditto, coloured in Counties, mounted on linen to fold in a case for the Library, or on roller	1	11	6
Ditto, ditto, Geologically	2	6	0
Ditto, coloured in Counties, and surrounded with a New Statistical and Topographical Chart of the United Kingdom	2	5	0
The same Map, with Chart on strainer, in neat black frame and varnished	3	18	0
The Chart, showing the Statistics and Topography of the United Kingdom, may be had mounted on linen to fold, or on roller, separately	0	18	0
Ditto, ditto, in sheets	0	16	0

Mahogany Rollers and Varnishing will be charged extra 3s.

243.

The OFFICIAL MAP AND SECTION OF THE BRIGHTON RAILWAY, produced under the direction of J. A. Rastrick, Esq., size 33 inches by 19½, containing the country from 30 miles north of the Thames to the English Channel, and from Maidenhead west to Chatham east.   Price, in 1 large Sheet, coloured

	0	3	0
Folded in linen	0	4	0
Mounted on linen and folded for the pocket	0	6	0
Mounted on linen, with roll and ledge	0	5	6
Framed and Varnished in neat black frame for the Counting House, &c.	0	12	0

244.

The NATIONAL MAP OF ENGLAND, to be completed in 58 sheets, size of each sheet 20 inches by 16.   Drawn to a Scale of 3 miles to the inch, and showing all the Railways.

No. I. containing Middlesex, and a large portion of Hertfordshire, Essex, Surrey, Kent, and part of Bucks, plain	0	1	0
Ditto, ditto, coloured	0	1	6
No. II. contains part of Surrey, Kent, and nearly the whole of Sussex, plain	0	1	0
Ditto, ditto, coloured	0	1	6

ALSO MAY BE HAD,

No. I. of the Geological Series of the above, with descriptive matter, and a separate Index, beautifully coloured	0	3	0

The Geology of the Map has been carefully laid down from the best authorities, and from actual observation, by Mr. SAMUEL HUGHES.

This Map will be the largest Geological Map published; every sheet is complete in itself.

245.

The ENVIRONS OF LONDON, to the extent of 30 miles from the Post Office, mounted on linen for the pocket   0 2 6

This Map will be found the cheapest, and to contain the largest mass of information yet produced.

246.

In Royal 4to., Parts I. and II.

ATLAS OF CONSTRUCTIVE GEOGRAPHY.

FOR THE USE OF STUDENTS.

By W. HUGHES, Esq., F.R.G.S., Professor of Geography in the College for Civil Engineers.

The importance of Maps in the study of Geography is universally admitted, but rather with a vague idea of their value than with any definite notion of the use to be made of them. The object of the present work is *to place before the student of Geography* the materials from which he may *construct for himself* the foundations of geographical knowledge. To effect this, he is required in the first instance to draw Maps representing the general geographical relations which all parts of the globe bear to one another, and afterwards Maps representing the physical and political features of the particular portions of the earth which it may be requisite to study in detail. He will thus impress on his mind a clear conception of the great outlines of Geography; of the relative situation and extent of mountains, plains, seas, rivers, kingdoms, towns, and other geographical features; and form a system to which those portions of Geography which relate to the moral and political condition of mankind may be at once referred, and classed in their proper order.

The first portion of this Atlas will be confined strictly to Physical Geography;—that part of the work comprised under this head will illustrate first the general Physical Geography of the two Continents, and afterwards in succession, in greater detail, that of Europe, Asia, Africa, America, Australasia, and the British Islands.

Each Map is accompanied by a correspondent *blank projection*, containing only the parallels and meridians, and on which the student is to draw the Map for himself, not merely *copying* it from the finished plates, but *constructing* it step by step, by referring every thing in it to latitude and longitude.

The descriptive letter-press which accompanies each Map enables the student to do this by a method explained in the work itself, which contains Tables showing the latitude and longitude of the most prominent points on the coast, together with the names of the islands, peninsulas, seas, gulfs or bays, straits,—highlands, mountains, and lowlands,—and of the lakes and rivers, contained in the various parts of the globe, their places in the Map being referred to by means of latitude and longitude. The heights of mountains or table-lands above the sea, the elevation and depth of lakes, the nature and extent of deserts, the mineralogical character and climate of particular parts of the earth, and other information relating to Physical Geography, are also given. These portions of the work, as well as the Maps, have been prepared with the most rigid accuracy, and with reference to the constantly increasing amount of geographical knowledge.

The portion of the work relating to Physical Geography will be completed in eight Parts, the average price of which will not exceed 2s. 6d. per Part. The Maps of the continental divisions of the earth will all be drawn upon *the same scale*, a plan which has not hitherto been pursued in any Atlas, but which is the only one which can enable a student to acquire correct ideas of the *relative magnitude* of different countries, and prevent him from confounding the similarity of size in the representation with the actual magnitude of the countries themselves.

Part I. contains THE EASTERN HEMISPHERE, with a blank projection and descriptive letter-press, price 3s. 6d. Part II. THE WESTERN HEMISPHERE, &c., price 2s. 6d. Part III., containing EUROPE, &c., will be published on the 1st of October.

To meet the views of those who may wish to avail themselves of the Maps as Geographical Exercises, without using the descriptive parts of the work, the Maps and Blank Projections are also published separately. These alone will constitute a complete and entirely new Series of

OUTLINE MAPS,

Adapted either for the use of Schools or for Private Tuition. No. I., containing the EASTERN and WESTERN HEMISPHERES, with two Blank Projections, has been receptly published. No. II., containing EUROPE and ASIA, will appear on the 1st of October. To be completed in 5 Numbers, price 2s. each.

247.

In 4to., bound in cloth, Price 10s. 6d.

OBSERVATIONS UPON CORNISH AND BOULTON AND WATT BOILERS AND PUMPING ENGINES;

With Tables of Detail and Results of Experiments.

By THOMAS WICKSTEED, M.InstC.E.

An APPENDIX, illustrative of the same, is in preparation in Atlas folio, consisting of very EX-PLANATORY ENGRAVINGS, to be produced in a superior style by GLADWIN, and placed in a Portfolio.

Names for early copies of impressions should be sent addressed to Mr. WEALE.

248.

THE ELGIN MARBLES.

To be Published by Subscription, when 100 Names are obtained,

A NEW EXPLANATION OF THE GREAT COMPOSITIONS OF PHIDIAS

·IN THE TWO PEDIMENTS OF THE PARTHENON ON THE ACROPOLIS OF ATHENS,

Founded upon the Remains of the Statues now in the British Museum, and those which are still upon the Temple.

By the CHEVALIER P. O. BRÖNDSTED,

Conseiller intime de Légation of H. M. the King of Denmark; Director of the Royal Cabinet of Coins and Medals at Copenhagen, and Member of several Academies.

The Editors of this work are persuaded that it can scarcely fail to meet with a favourable reception, as well from those classes which are indebted to the genius of ancient Greece, and of Athens in particular, for the best part of their own instruction and refinement, as from the public at large, who pride themselves on the possession of these beautiful relics of Phidias and his school.

The early appearance of the volume, for the Illustration of which from twenty-five to thirty copper-plate engravings, some of them works of great labour, will be required, must necessarily depend on the success of the Subscription; but it is confidently expected that it will be published in the course of the present year.

The letter-press will comprise about fifteen or sixteen sheets of imperial quarto; and the price to Subscribers will be £3. 10s.   No copies will be printed on a larger paper.

The greater part of the Plates, illustrative of the Book, will be by the hand of Mr. CORBOULD, a name already celebrated for the drawings and engravings of the Athenian Marbles, in the publications of the Trustees of the British Museum.